


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
V _{SS} ,K	V _{CC}	V _{EE}	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A

NOTES:

- 1: DISPLAY TYPE: STN/YELLOW-GREEN MODE
- 2: VIEWING DIRECTION: 6: 00
- 3: POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4: DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5: LCD OPERATING VOLTAGE: 4.3V
- 6: OPERATING TEMP.: 0° - +50°C
- 7: STORAGE TEMP.: -20° - +60°C
- 8: BACKLIGHT: LED
- 9: CONTROLLER: S6A0069X01-COCX(KS0066UP-00CC)
- 10: ALL UNMARKED TOLERANCES: ±0.2mm
- 11: BEZEL IS TO BE PAINTED BLACK

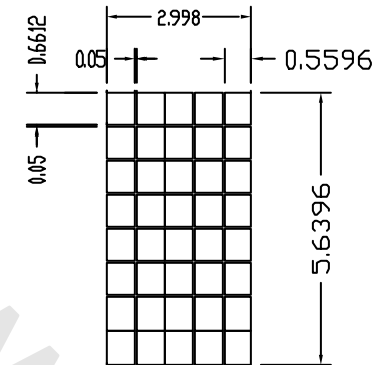

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM162A7BC6	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM162A7BC6G-1	SHEET NO: 0F
CONFIRMED BY:		UNIT: mm