



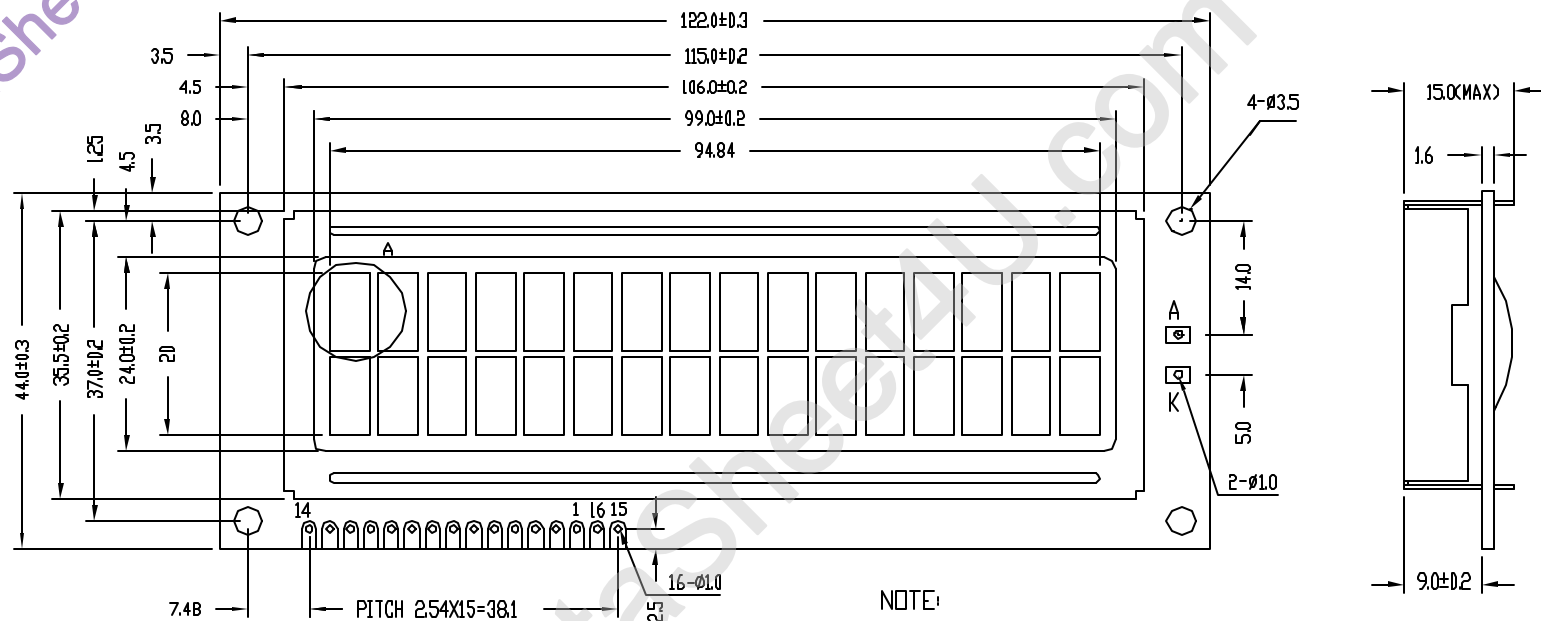

DETAIL A:

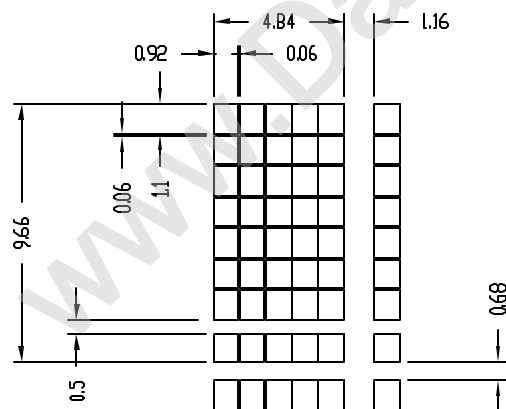

NOTE:

1. DISPLAY TYPE: TN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. OPERATING VOLTAGE: 4.5V
6. OPERATING TEMP: -20°C~+70°C
7. STORAGE TEMP: -30°C~+80°C
8. BACKLIGHT TYPE: LED(RED)
9. CONTROLLER: KS0066UP-00
10. UNMARKED TOLERANCE: $\pm 0.3\text{mm}$
11. THE BEZEL IS TO BE PAINTED BLACK

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K



TIAN-MA MICROELECTRONICS CO.

6/F., CASTEC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM162GACW7	SCALE:
CHECKED BY:	DWG NO: G-2	UNIT: mm
APPROVED BY:	DWG NAME: TM162GACW7G-2	SHEET NO: 01
CONFIRMED BY:		