



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	Vcc	Vee	RS	R/H	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

1. DISPLAY TYPE: STN/Y-G MODE
2. VIEWING DIRECTION: 61.00
3. POLARIZER MODE: TRANSMISSIVE/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. VDD: 5.0V
6. LCD OPERATING VOLTAGE: 4.7V
7. OPERATING TEMP: -20°C~+70°C
8. STORAGE TEMP: -30°C~+80°C
9. BACKLIGHT: LED
10. CONTROLLER: S6A0069X01-C0CX
11. ALL UNMARKED TOLERANCES: $\pm 0.3\text{mm}$
12. BEZEL IS TO BE PAINTED BLACK

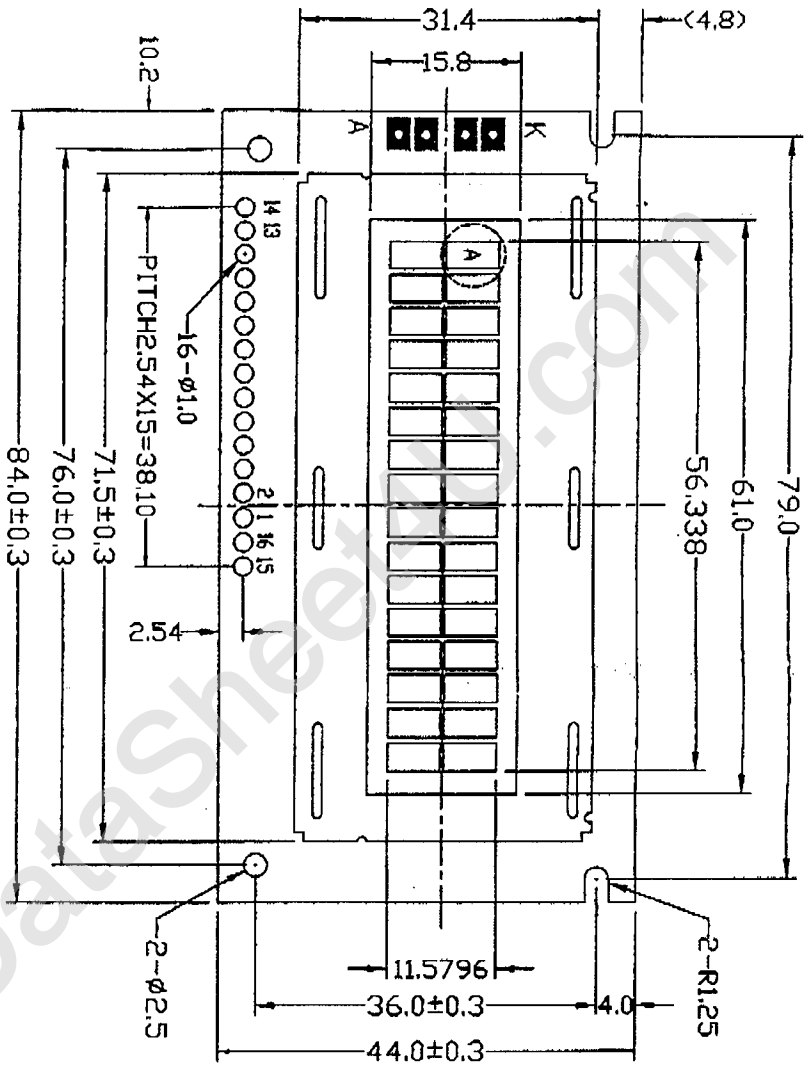

DETAIL: A

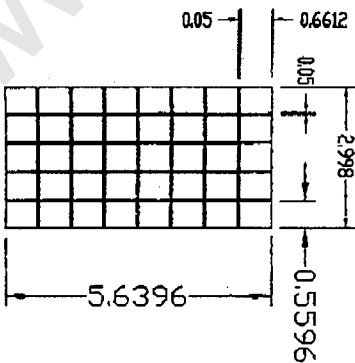

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN	BY: 26/8-03	TITLE	TM1621BFW6	SCALE	1:1
CHECKED	BY: 26/8-03	DWG NO.	0-4	UNIT	mm
APPROVED	BY: 26/8-03	DATE	26/8-03	DESIGNER	ALBERT
CONFIRMED	BY: 26/8-03	DATE	26/8-03	DESIGNER	ALBERT