



液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

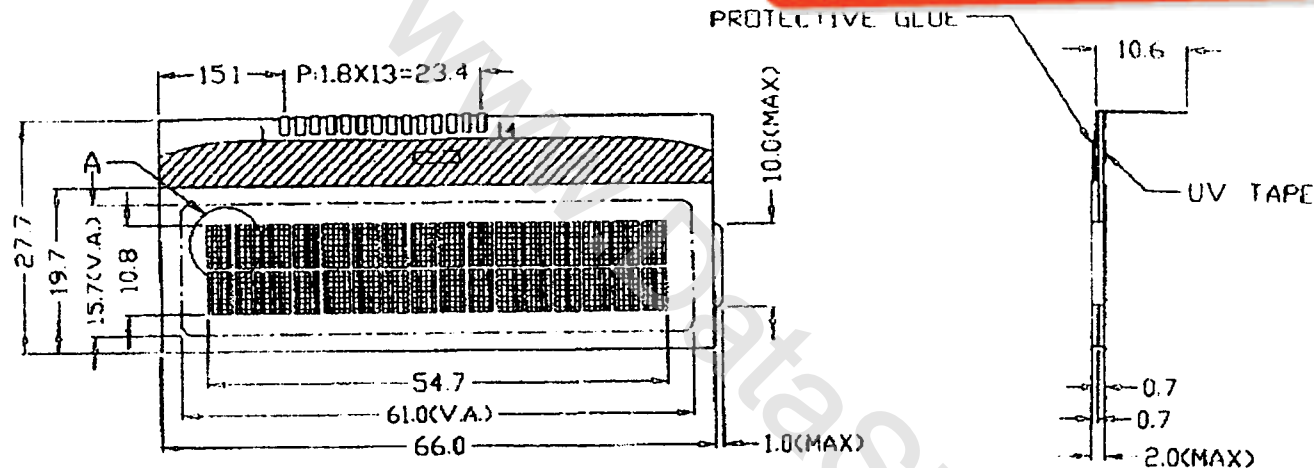

DETAIL A:

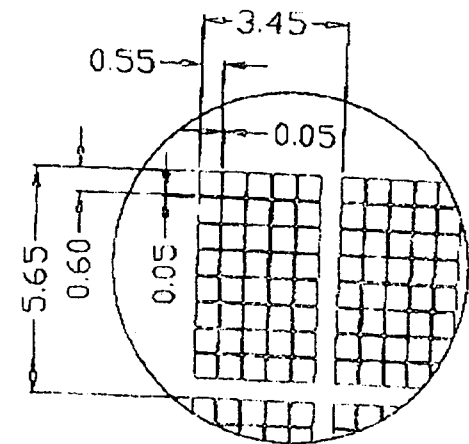

1	2	3	4	5	6	7	8	9	10	11	12	13	14
V _{SS}	V _{DD}	V _O	R _S	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

NOTES:

1. DISPLAY TYPE: FSTN MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: REFLECTIVE/POSITIVE
4. OPERATING TEMP: 0°C--+50°C
5. STORAGE TEMP: -20°C--+60°C
6. VDD: 5.0V
7. LCD OPERATING VOLTAGE: 4.3V
8. DRIVE METHOD: DUTY 1/16 BIAS 1/5
9. CONTROLLER: S6A0032X01-BOCY(KS0032UM-00CC)
10. ALL UNMARKED TOLERANCES: ±0.3mm
11. PIN CONNECTOR



TIAN-MA MICROELECTRONICS CO.

22/F., HANGBU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: [Signature]	TITLE: TM162JCAG	SCALE: [Symbol]
CHECKED BY: [Signature]	DWG NO: G-1	UNIT: mm
APPROVED BY: [Signature]	DWG NAME: TM162JCAG-1	SHEET NO: 01
CONFIRMED BY: [Signature]		