


液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

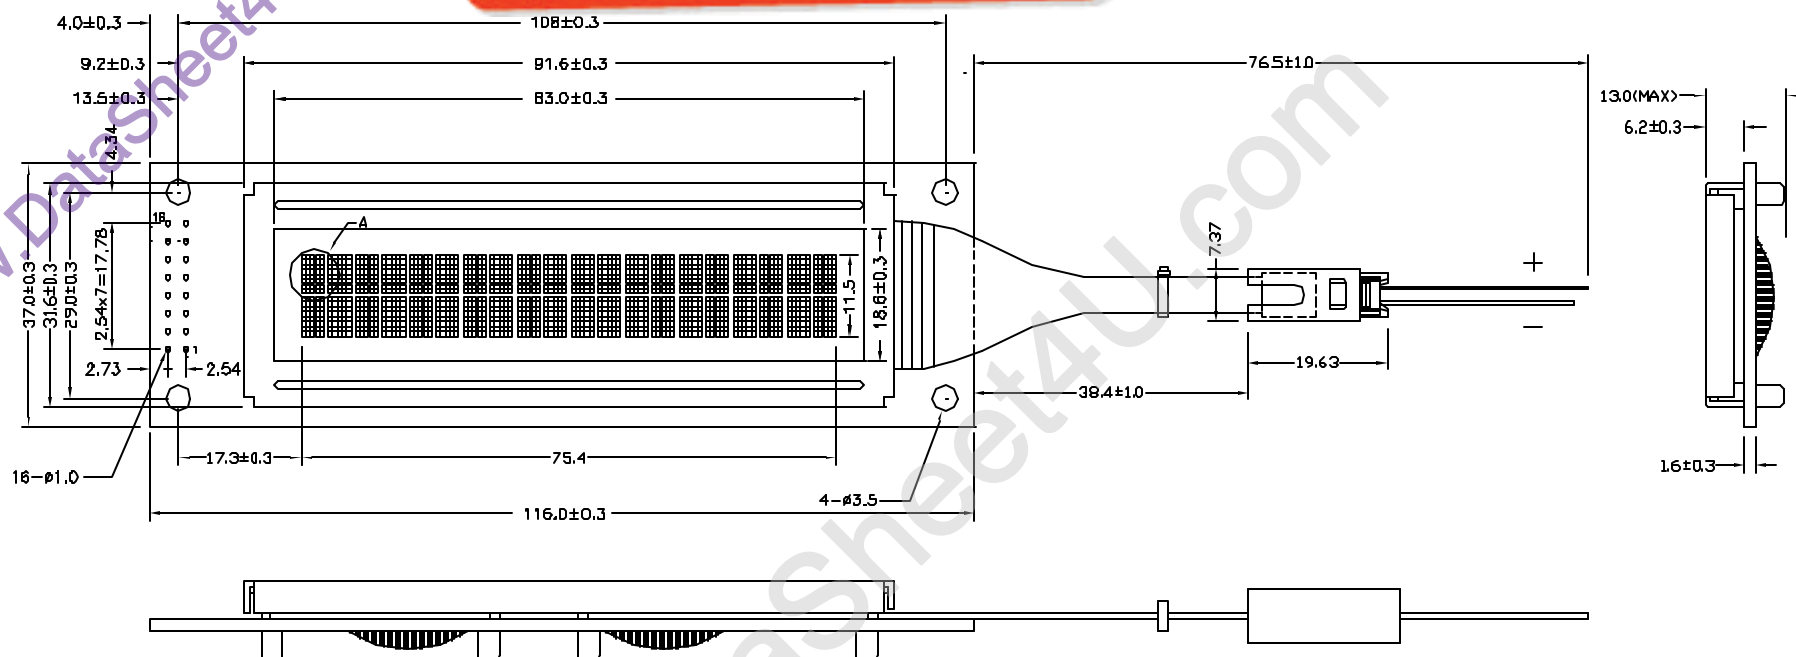


DETAIL A:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC

NOTES:

- 1.DISPLAY TYPE: STN/Y-G MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANFLECTIVE/POSITIVE
- 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5.LCD OPERATING VOLTAGE: 4.7V
- 6.OPERATING TEMP: 0°C-+50°C
- 7.STORAGE TEMP: -20°C-+60°C
- 8.CONTROLLER: S6A0069X01-C0CX(KS0066UP-00CC)
- 9.BACKLIGHT TYPE: FIBER OPTIC WITH ONE LED
- 10.BEZEL IS TO BE PAINTED BLACK
- 11.ALL UNMARKED TOLERANCE: ±0.3



TIAN-MA MICROELECTRONICS CO.

22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM202JBN6	SCALE
CHECKED BY:	DWG NO: G-1	UNIT: mm
APPROVED BY:	DWG NAME: TM202JBN6G-1	SHEET NO: 01
CONFIRMED BY:		