

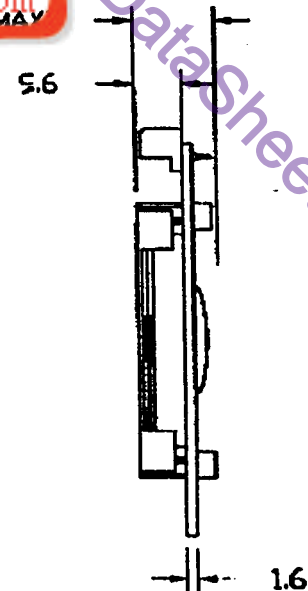


液晶之友 电话: 020-33819057

Http://www.lcdfriends.com

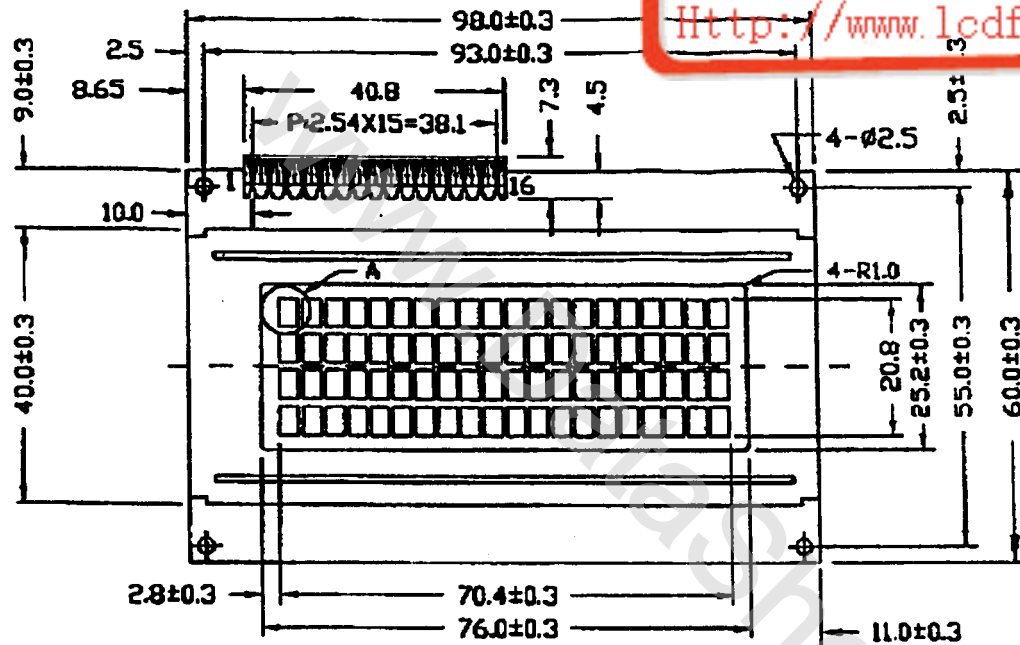

DETAIL: A



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _{EE}	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

NOTES:

1. DISPLAY TYPE: STN/YELLOW-GREEN MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE: 4.7V
6. OPERATING TEMP.: 0°C-+50°C
7. STORAGE TEMP.: -20°C-+60°C
8. CONTROLLER: KS0066UP-00CC
9. BACKLIGHT: LED
10. BEZEL IS TO BE PAINTED BLACK
11. ALL UNMARKED TOLERANCES: ±0.3mm
12. CONNECTOR: 1008-216-2106(methode)



TIAN-MA MICROELECTRONICS CO.

G/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: [Signature]	TITLE: TM204ABC7	
CHECKED BY: [Signature]	DWG NO: G-1	
APPROVED BY: [Signature]	DWG NAME: TM204ABC7-1	SHEET NO: 02
CONFIRMED BY: [Signature]		