



液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

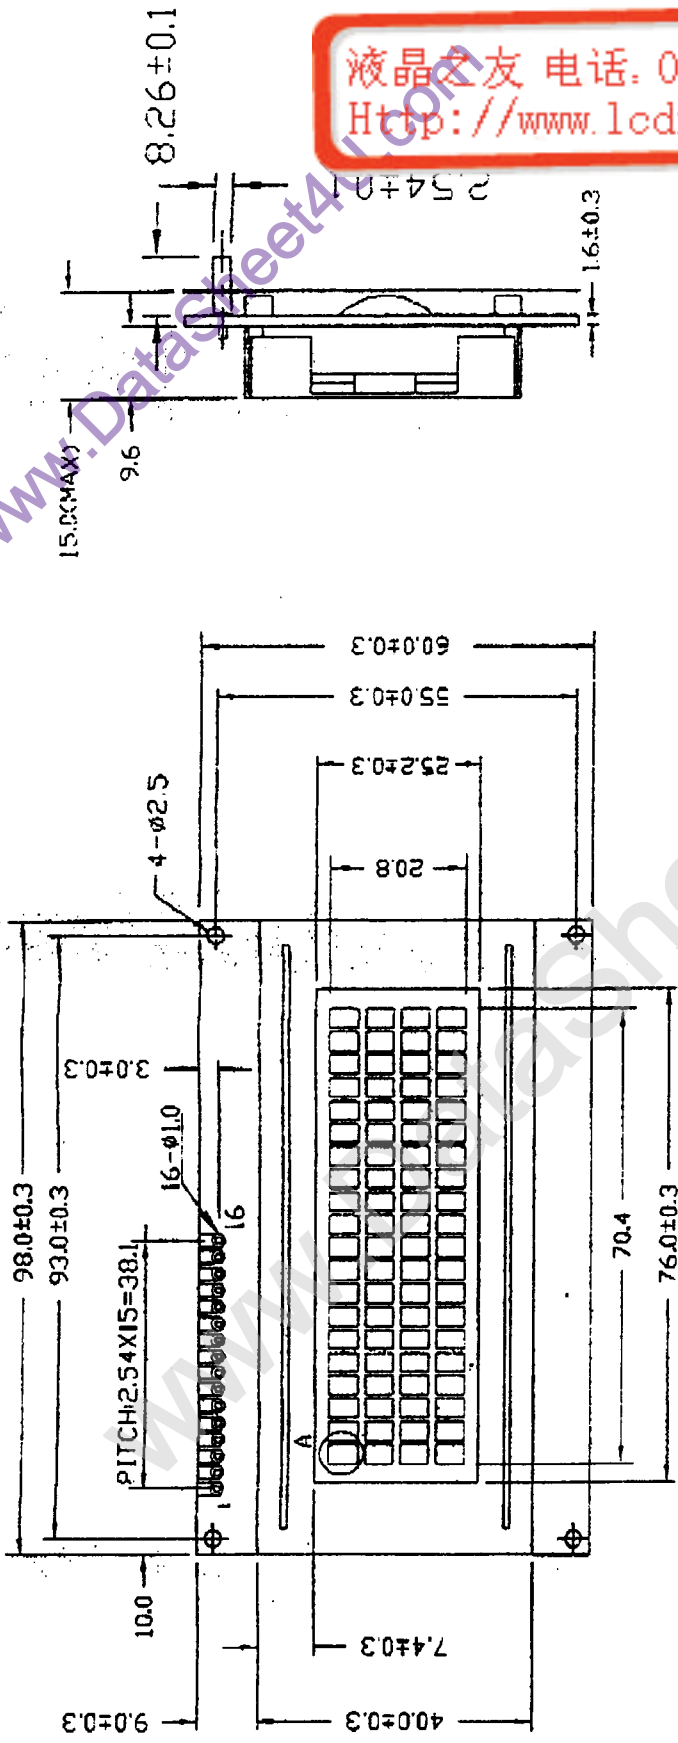

DETAIL A:

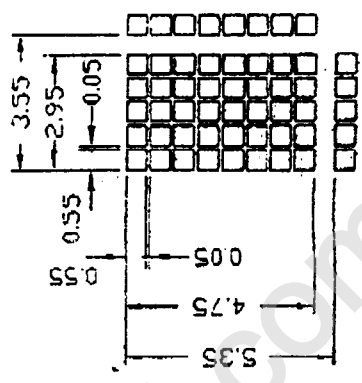

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	R _S	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-	LED-

- NOTES:
1. DISPLAY TYPE: STN/YELLOW MODE
 2. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
 3. VIEWING DIRECTION: 6:00
 4. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
 5. LCD OPERATING VOLTAGE: 4.7V
 6. OPERATING TEMP: 0°C--+50°C
 7. STORAGE TEMP: -20°C--+60°C
 8. BACKLIGHT TYPE: LED
 9. CONTROLLER: S6A0069X05-C0CX
 10. CONNECTOR TYPE: 929974-01-16(3M)
 11. ALL UNMARKED TOLERANCE: ±0.3mm
 12. BEZEL IS TO BE PAINTED BLACK

TIAN-MA MICROELECTRONICS CO.
 22/F., WANGU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: [Signature]
 CHECKED BY: [Signature]
 APPROVED BY: [Signature]
 CONFIRMED BY: [Signature]

TITLE: TM204ABC9
 DWG NO: G-2
 SCALE:
 SHEET NO. OF