


液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

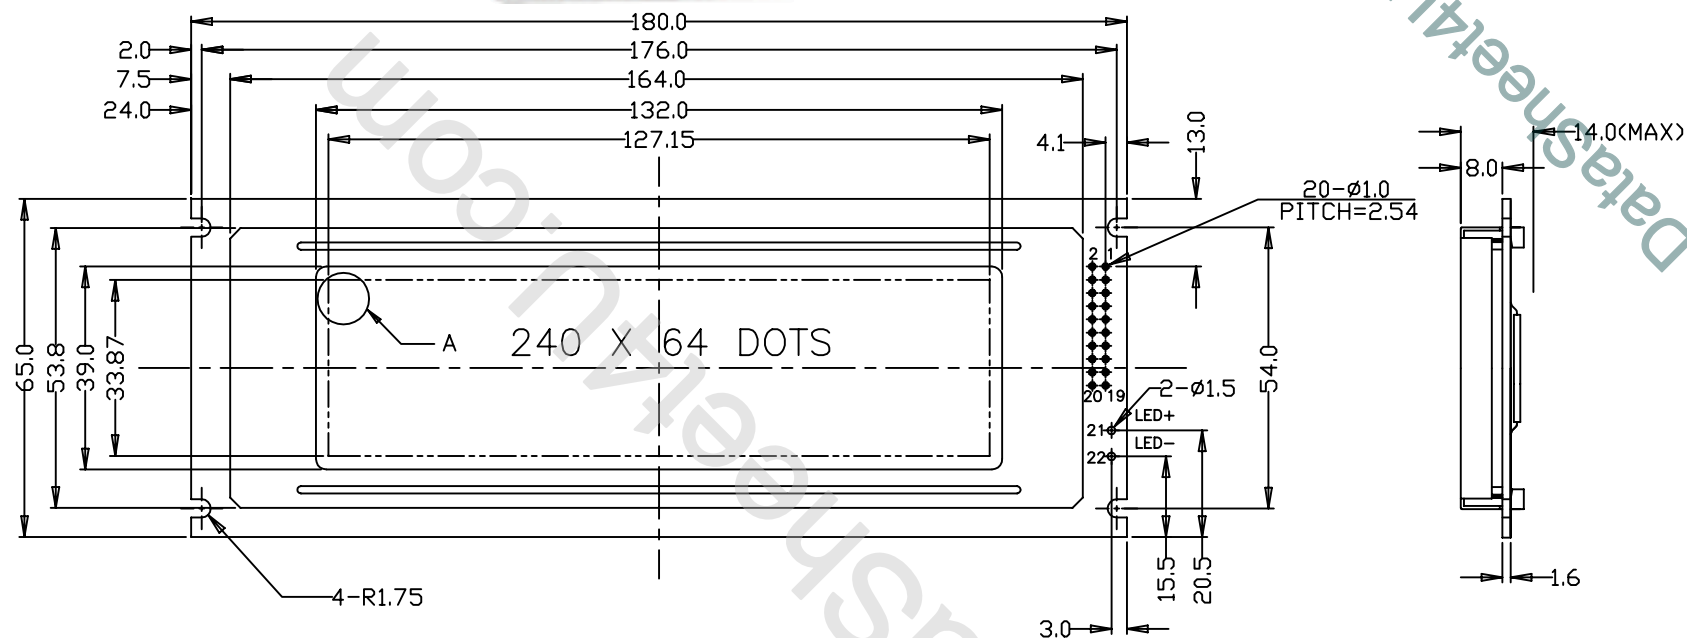


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
FG	V _{SS}	V _{CC}	V _O	WR	RD	CE	C/D	NC	RESET	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	NC	LED+	LED-

NOTES:

1. DISPLAY TYPE: STN/YELLOW-GREEN MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. OPERATING TEMP.: 0°C~+50°C
5. STORAGE TEMP.: -20°C~+60°C
6. CONTROLLER: T6963C
7. LCD OPERATING VOLTAGE: 14.3V
8. LCD DRIVE METHOD: DUTY 1/64 BIAS 1/9
9. ALL UNMARKED TOLERANCES: ±0.3mm
10. BACKLIGHT TYPE: LED
11. BEZEL IS TO BE PAINTED BLACK

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM24064LBC	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM24064LBCG-1	SCALE: UNIT: mm
CONFIRMED BY:	SHEET NO: OF	