



液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

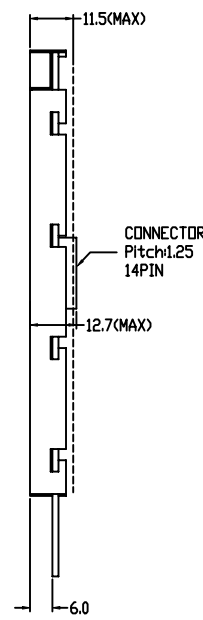


I/O PORTS



NO.	SYMBOL
1	Vdd
2	Vss
3	/DFF
4	YD
5	LP
6	XSCL
7	XD0
8	XD1
9	XD2
10	XD3
11	VL
12	VEE
13	LED+
14	LED-

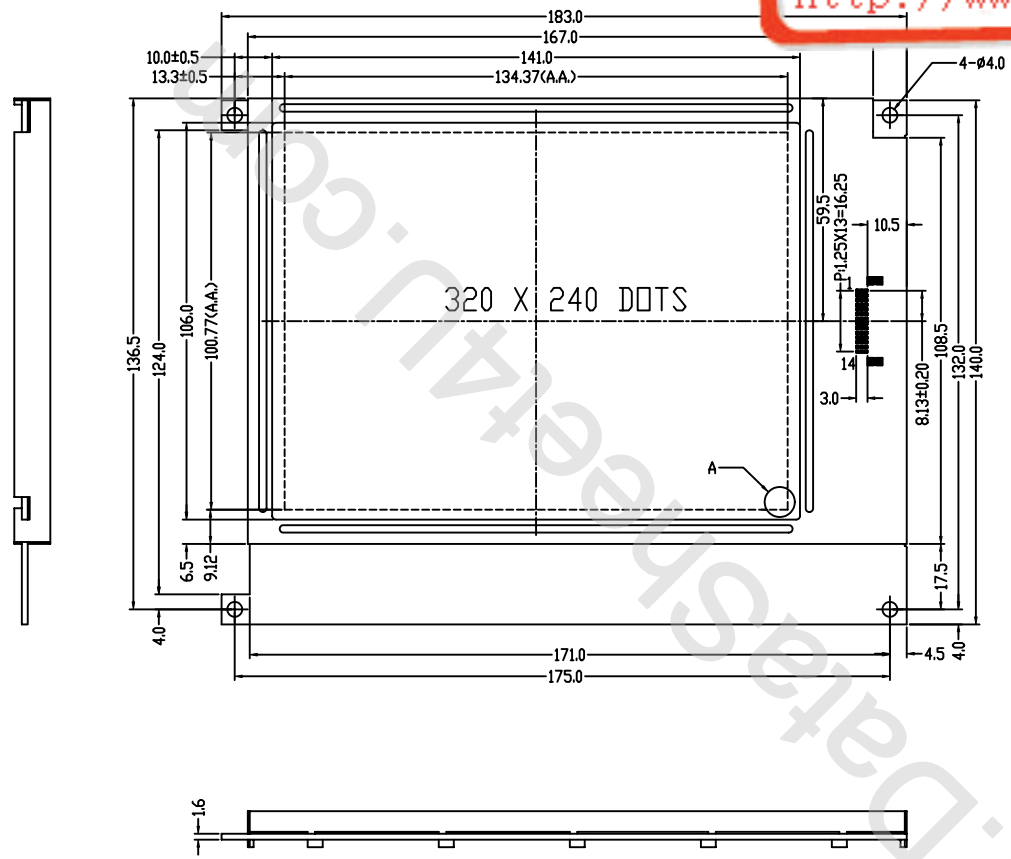

DETAIL A:



- NOTES:
- | | |
|---|------------------------|
| 1. DISPLAY TYPE: | FSTN MODE |
| 2. VIEWING DIRECTION: | 6: 00 |
| 3. POLARIZER MODE: | TRANSFLECTIVE/POSITIVE |
| 4. DRIVE METHOD: | MLA(FOUR LINES) |
| 5. VDD=5.0V | |
| 6. OPERATING TEMP: | -25°C~+70°C |
| 7. STORAGE TEMP: | -30°C~+80°C |
| 8. COM DRIVER: SSD1870T2R; SEG DRIVER: SSD1882T1R X 2 | |
| 9. BACKLIGHT: | LED(WHITE) |
| 10. ANTI-HUMIDITY, ANTI-MILDEW AND ANTI-SALTFOG PCB | |
| 11. BEZEL IS TO BE PAINTED WHITE | |
| 12. ALL UNMARKED TOLERANCES: | ±0.3mm |

 TIAN-MA MICROELECTRONICS CO. 22/F., CASTIC Building, Shennan Road, Central, Shenzhen, China		
DRAWN BY:	TITLE: TM320240ACCWT	
CHECKED BY:	DWG NO: G-4	
APPROVED BY:	SCALE	UNIT: mm
CONFIRMED BY:	DWG NAME: TM320240ACCWTG-4	SHEET NO: 1 OF 1