



- NOTES:
1. DISPLAY TYPE: 600
 2. VIEWING DIRECTION: TRANSMISSIVE/NEGATIVE
 3. POLARIZER MODE: 1/240 DUTY 1/15 BIAS
 4. DRIVE METHOD: 2T1B
 5. VEE: 5.0V
 6. VDD: 21.6V
 7. OPERATING TEMP: -25°C~+55°C
 8. STORAGE TEMP: -35°C~+65°C
 9. DRIVER: 1S130241AO
 10. BACKLIGHT: CCFLAC270V WHITE
 11. BEZEL IS STAINLESS STEEL
 12. ALL UNMARKED TOLERANCES: ±0.3mm

DETAIL A:




COLOR FILTER



BLACK MASK

CON 1				CON 2			
PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL
1	M	1	VFL1	1	M	1	VFL1
2	YD	2	NC	2	YD	2	NC
3	LP	3	VFL2	3	LP	3	VFL2
4	XCK			4	XCK		
5	DISPuff			5	DISPuff		
6	VDD			6	VDD		
7	VSS			7	VSS		
8	VEE			8	VEE		
9	D7			9	D7		
10	D6			10	D6		
11	D5			11	D5		
12	D4			12	D4		
13	D3			13	D3		
14	D2			14	D2		
15	D1			15	D1		
16	D0			16	D0		

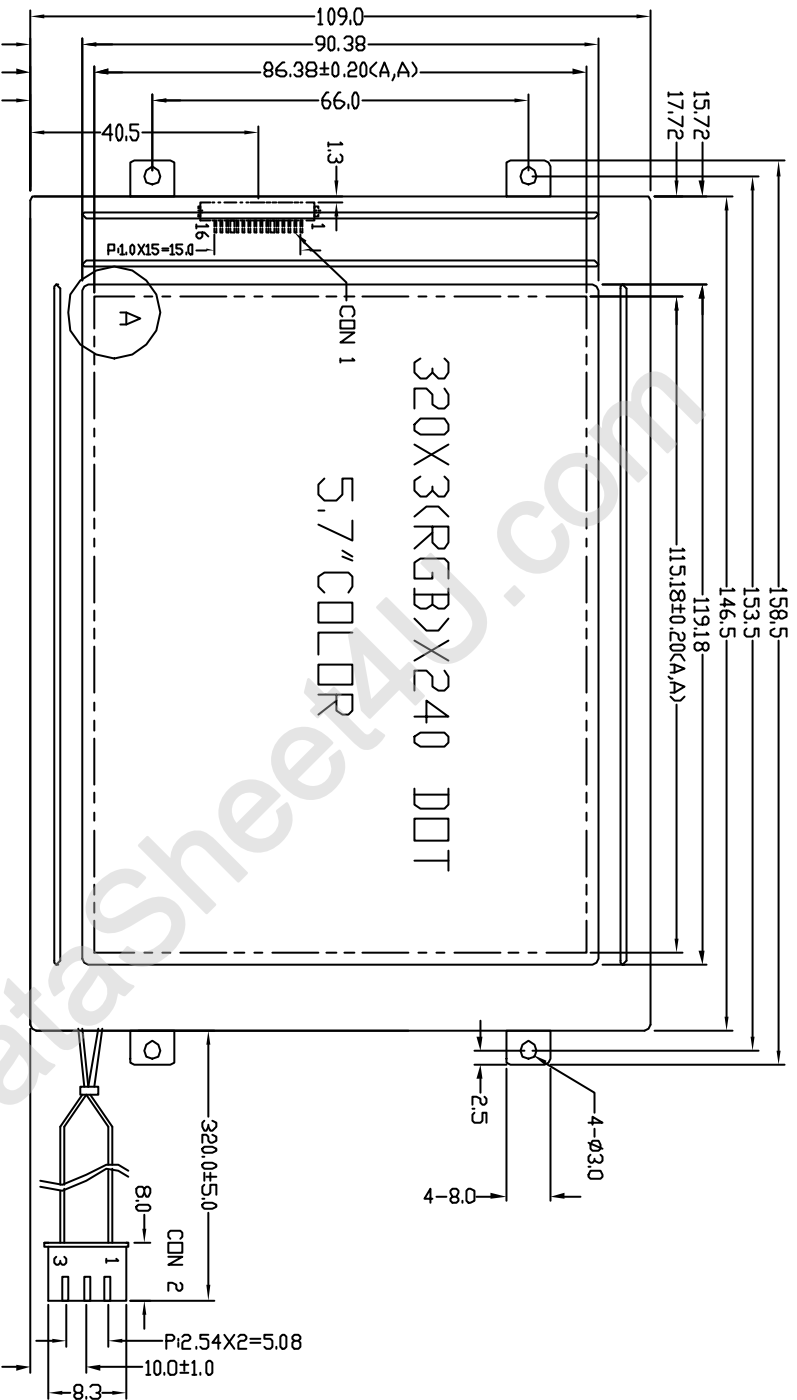

TIAN-MA MICROELECTRONICS CO.

22/F., HANJOU Building, Sheppan Road, Central, Shenzhen, China

DRAWN BY:

CHECKED BY:

APPROVED BY:

CONFIRMED BY:

TITLE: TM320240KGT-1

DWG NO: G-1

DATE: 2004.11.11

DWG NAME: TM320240KGT-1 SHEET NO: 1 OF 1