
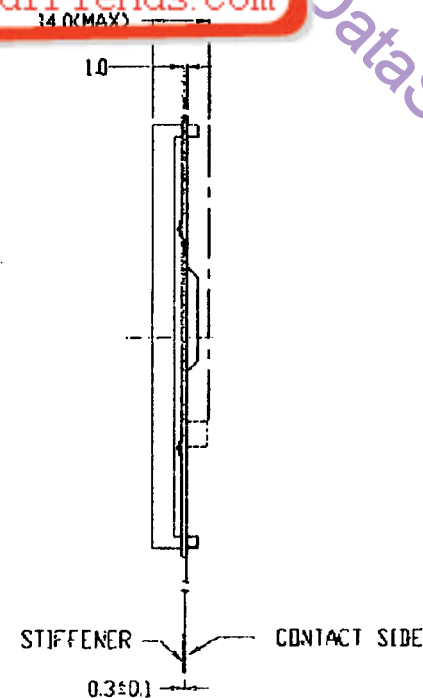



液晶之友 电话: 020-33819057

Http://www.lcdfriends.com

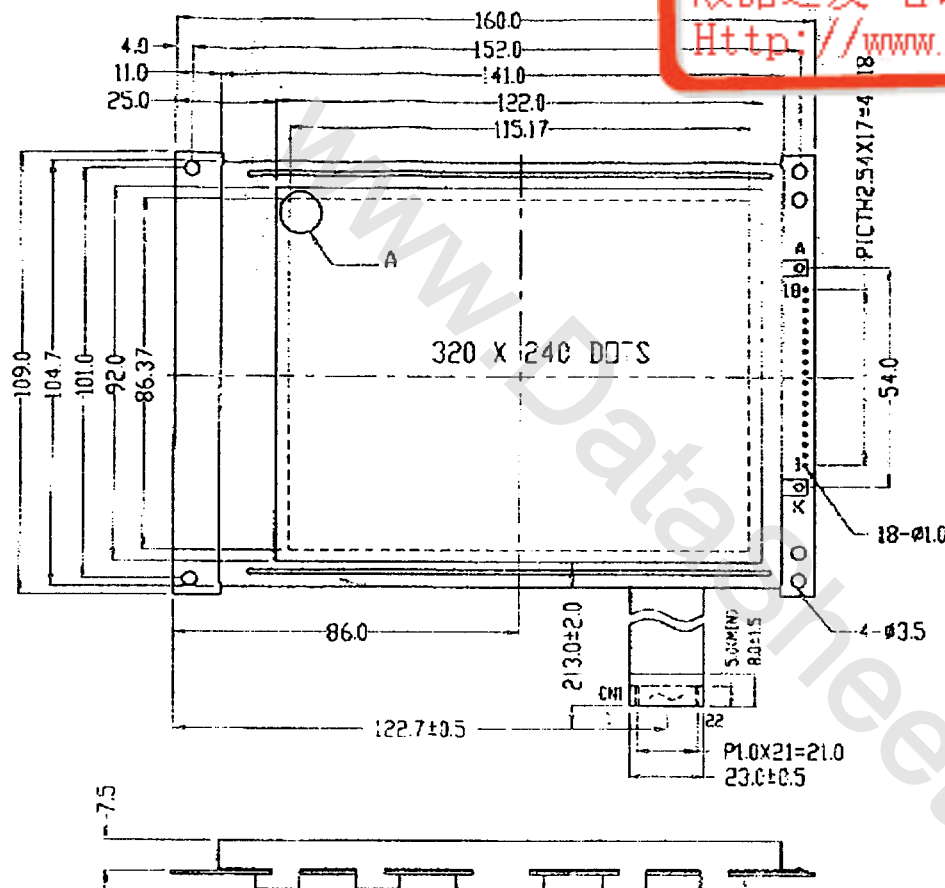

PIN CBL ASSIGNMENT	
PIN NO.	SYMBOL
1	VSS
2	VDD
3	VO
4	AO
5	R/W
6	E
7-14	D0-D7
15	/CS
16	/RET
17	VEE
18	SEL1
19-22	NC

DETAIL A:



NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 3:00
3. POLARIZER MODE: TRANSELECTIVE/POSITIVE
4. OPERATING TEMP: -20°C~+70°C
5. STORAGE TEMP: -30°C~+80°C
6. LED OPERATING VOLTAGE: 22.6V
7. DRIVE METHOD: 1/240 DUTY 1/16 BIAS
8. CONTROLLER: S6D1335F
9. BACKLIGHT TYPE: LED
10. BEZEL IS COATED WITH ZINC
11. ALL UNMARKED TOLERANCES: ±0.3mm



TIAN-MA MICROELECTRONICS CO.

22/F., HANGOU Building, Sherman Road, Central, Shenzhen, China

DRAWN BY: 王彬	TITLE: TM320240ECCVR	SCALE: 1:1
CHECKED BY: 王彬	DWG NO: G-1	DATE: 11.11.11
APPROVED BY: 王彬	DWG NAME: TM320240ECCVR-1	SHEET NO: 01
CONFIRMED BY: 王彬		