



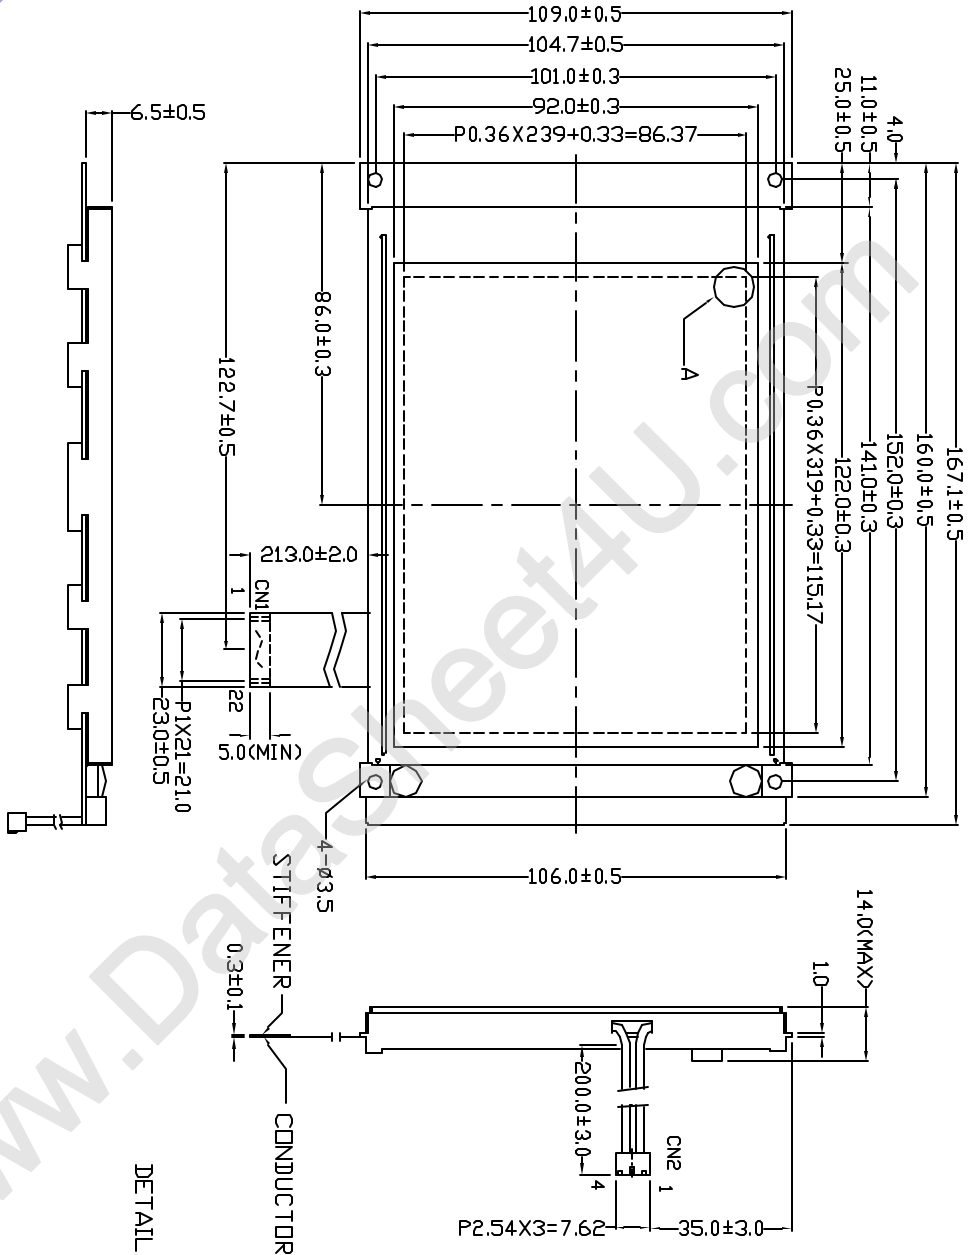

PIN NO.	PIN CN1 ASSIGNMENT SYMBOL	PIN NO.	PIN CN2 ASSIGNMENT SYMBOL
1	VSS 1	1	CFL HOT
2	VDD 2	2	N.C.
3	VD 3	3	N.C.
4	AD 4	4	OFL GND
5	R/W, WR		
6	E, RD		
7~14	ID0~D7		
15	CS		
16	RET		
17	VEE		
18	SEL1		
19~22	NC		

DETAIL A:



- NOTES:
- 1.DISPLAY TYPE: STN/BLUE
 - 2.VIEWING DIRECTION: 6.00
 - 3.POLARIZER MODE: TRANSMISSIVE/NEGATIVE
 - 4.OPERATING TEMP: $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$
 - 5.STORAGE TEMP: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
 - 6.LCD OPERATING VOLTAGE: 22.6V
 - 7.DRIVE METHOD: 1/240 DUTY 1/16 BIAS
 - 8.UNMARKED TOLERANCES: $\pm 0.3\text{mm}$
 - 9.BACKLIGHT TYPE: CCFL(COLOUR: AMBER)
 - 10.CONTROLLER: SED1335F
 - 11.BEZEL IS COATED WITH ZINC



TIAN-MA MICROELECTRONICS CO.

22/F., HANGOU Building, Shekou Road, Central, Shenzhen, China

DRAWN BY:		TITLE: TM320240EFG1	SCALE:
CHECKED BY:		DWG NO: G-1	UNIT: mm
APPROVED BY:		DWG NAME: TM320240EFG1-1	SHEET NO: 07
CONFIRMED BY:			