


液晶之友 电话: 020-33819057
Http://www.lcdfriends.com



PIN CN1 ASSIGNMENT		PIN CN2 ASSIGNMENT	
PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	/RESET	1	CFL HOT
2	/RD	2	N.C.
3	/WR	3	N.C.
4	/CS	4	CFL GND
5	A0		
6~13	D0~D7		
14	VDD		
15	VSS		
16	VEE		
17	V0		
18	SK		
19	D0		
20	DI		
21	CS		
22	IRQ		
23	NC		
24	NC		

- NOTES:
- 1.DISPLAY TYPE: FSTN
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
 - 4.OPERATING TEMP: -20°C~+70°C
 - 5.STORAGE TEMP: -30°C~+80°C
 - 6.LCD OPERATING VOLTAGE: 22.6V
 - 7.DRIVE METHOD: 1/240 DUTY 1/16 BIAS
 - 8.UNMARKED TOLERANCES: ±0.3mm
 - 9.BACKLIGHT TYPE: CCFL
 - 10.CONTROLLER: SED1335F0A
 - 11.WITH TOUCH PANEL AND DRIVE CIRCUIT
 - 12.BEZEL IS COATED WITH NICKEL

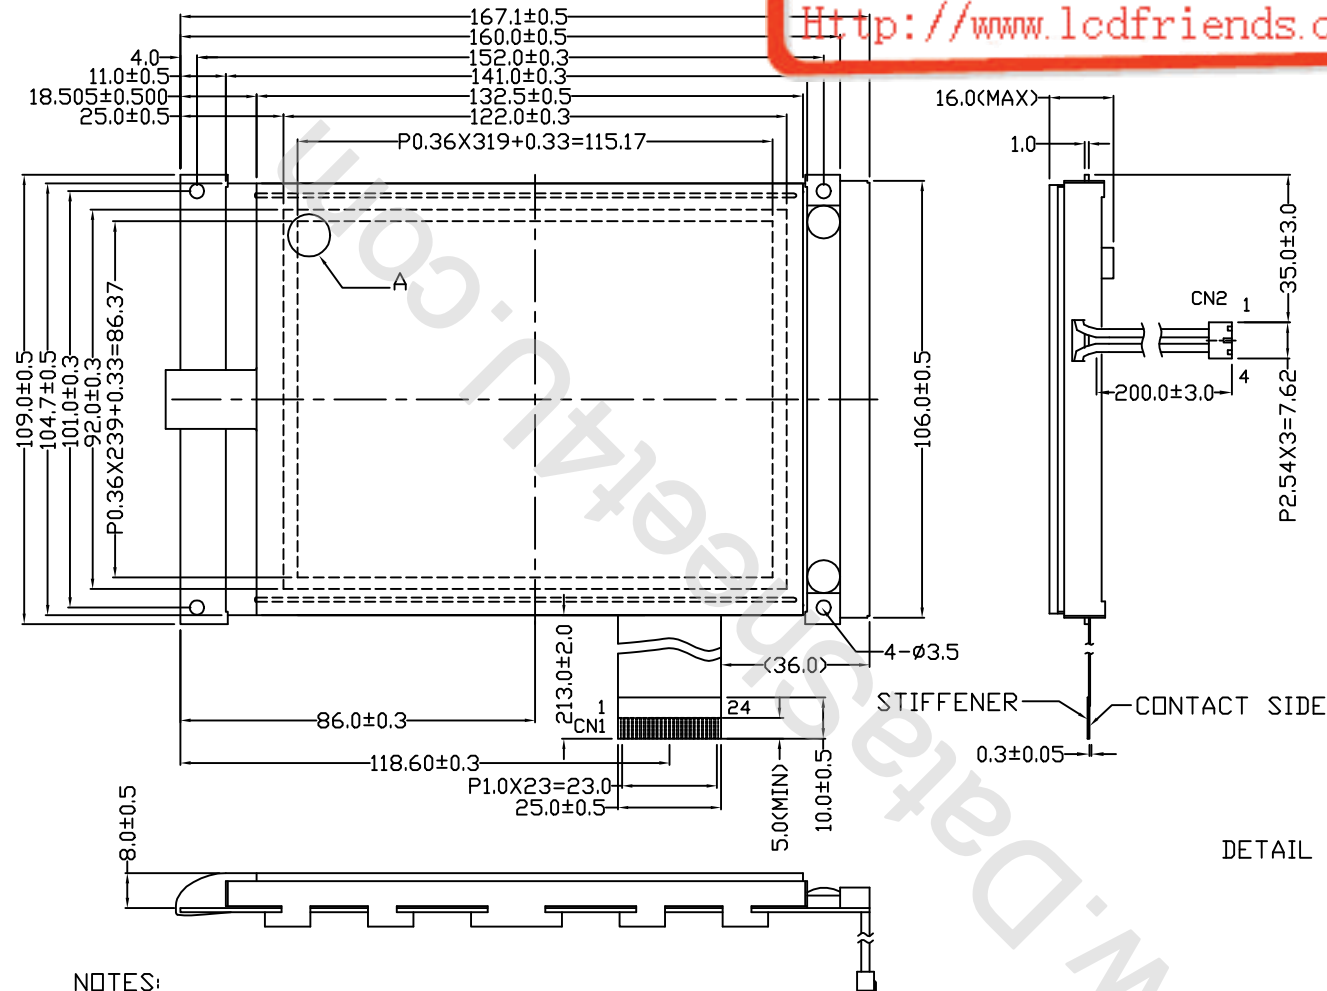

TIAN-MA MICROELECTRONICS CO.

22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM320240JCDW	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM320240JCDWG-1	SCALE:
CONFIRMED BY:	SHEET NO: 1 OF 1	UNIT: mm