



液晶之友 电话: 020-33819057

Http://www.lcdfriends.com

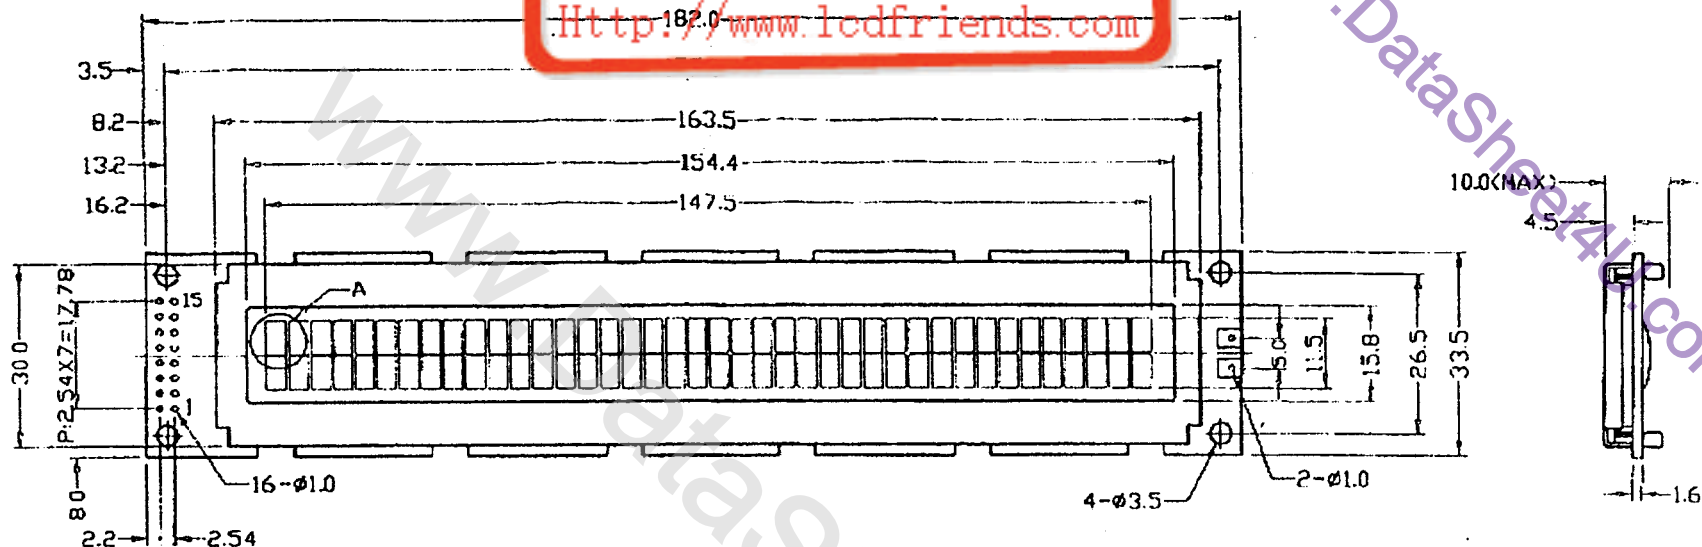

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _O	R _S	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	EL1	EL2

DETAIL A:

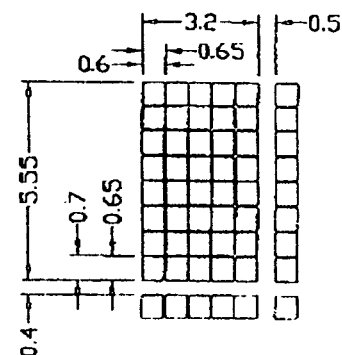

NOTES:

1. DISPLAY TYPE: FSTN MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. OPERATING TEMP.: 0°C~+50°C
5. STORAGE TEMP.: -20°C~+60°C
6. LCD OPERATING VOLTAGE: 4.7V
7. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
8. BACKLIGHT: EL
9. CONTROLLER: S6A0069X01-COCX(KS0066UP-00CC)
10. ALL UNMARKED TOLERANCES: $\pm 0.3\text{mm}$
11. BEZEL IS TO BE PAINTED BLACK



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 王维强

CHECKED BY: 王维强


APPROVED BY: 王维强

CONFIRMED BY: 王维强

TITLE: TM402CCB6

DWG NO: G-1

DWG NAME: TM402CCB6G-1 SHEET NO: 01



SCALE:
UNIT: mm