


液晶之友 电话: 020-33819057


Http://www.lcdfriends.com

www.DataSheet4U.com

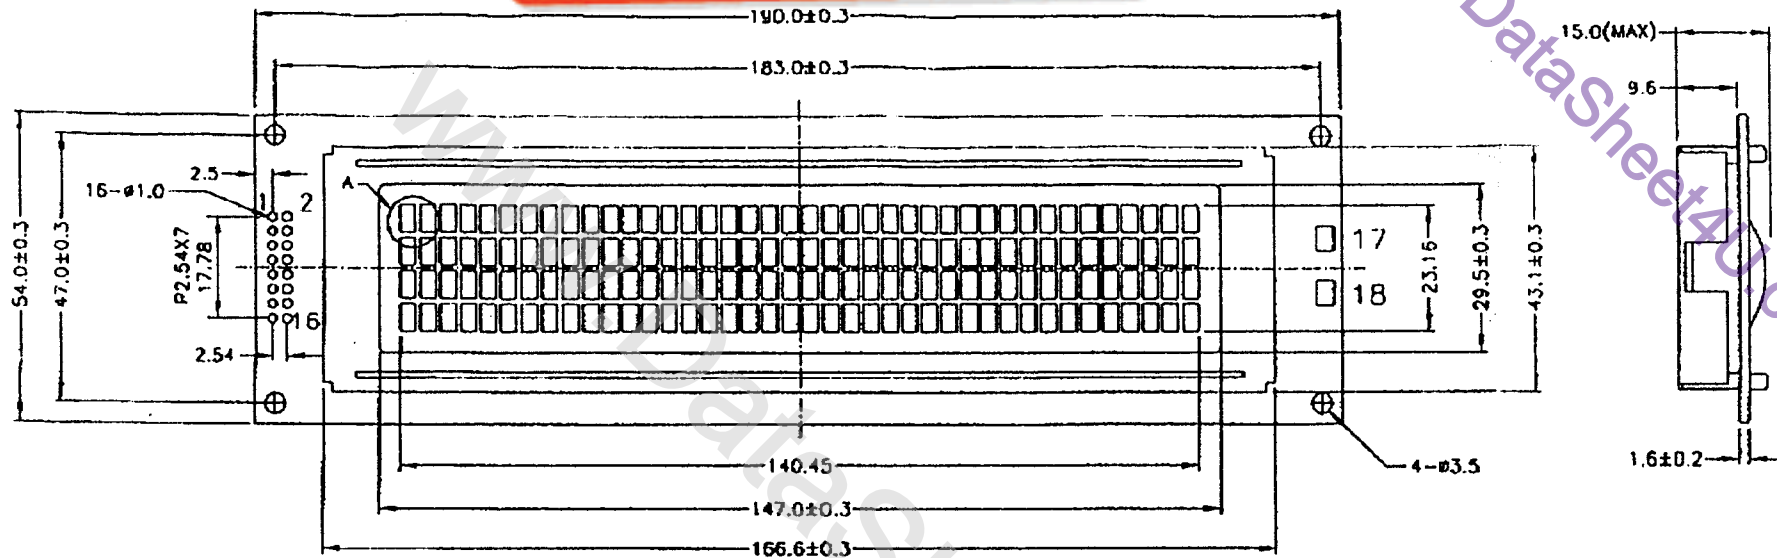

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E1	R/W	RS	Vee	Vss	Vcc	E2	NC	LED+	LED-

DETAIL A:

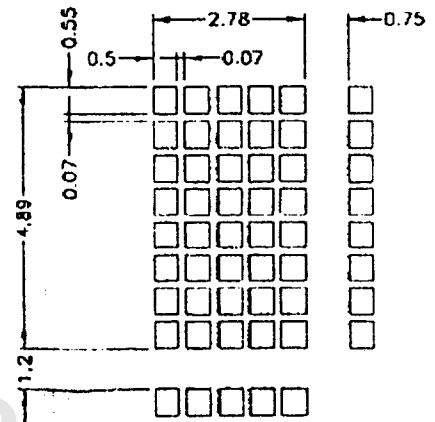

NOTES:

1. DISPLAY TYPE: STN/YELLOW MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE: 4.7V
6. OPERATING TEMP.: -20°C--+70°C
7. STORAGE TEMP.: -30°C--+80°C
8. CONTROLLER: S6A0069X01-COCX(KS0066UP-00CC)
9. BACKLIGHT: LED
10. BEZEL IS TO BE PAINTED BLACK
11. UNMARKED TOLERANCES: ±0.3mm



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Sherman Road, Central, Shenzhen, China

DRAWN BY: 王 21	TITLE: TM404ABCW6	
CHECKED BY: 张 21	DWG NO: G-1	
APPROVED BY: 张 21	CONFIRMED BY: 张 21	