


液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

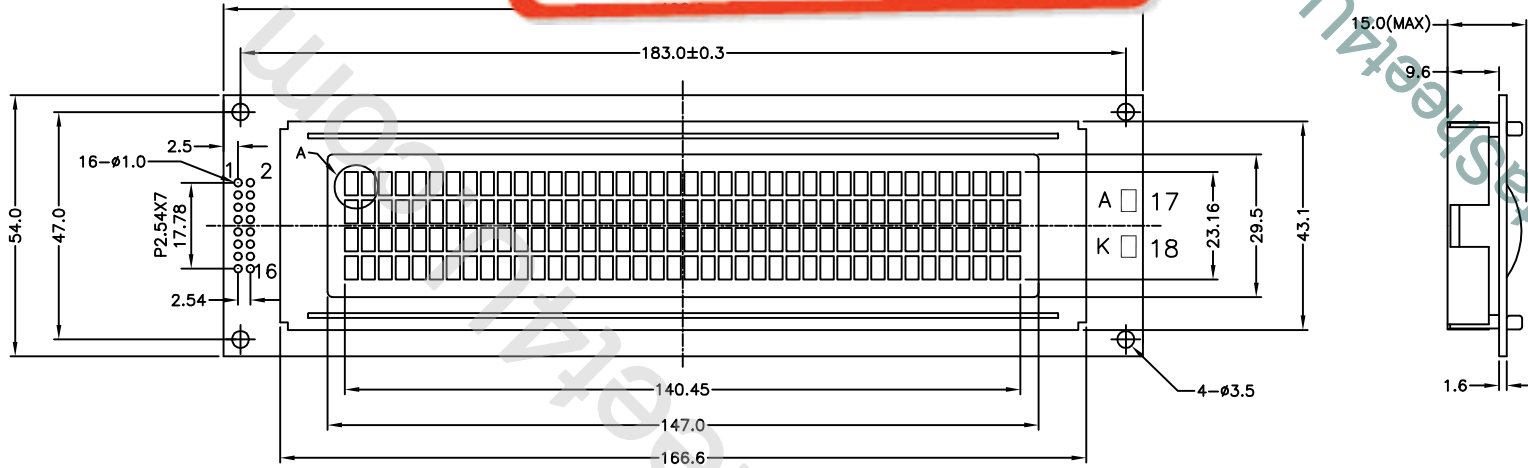


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E1	R/W	RS	Vee	Vss	Vcc	E2	NC	LED+	LED-

NOTES:

1. DISPLAY TYPE: STN/YELLOW-GREEN MODE
2. VIEWING DIRECTION: 12: 00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE: 4. 7V
6. OPERATING TEMP.: -10°C--+60°C
7. STORAGE TEMP.: -20°C--+70°C
8. CONTROLLER: S6A0070A32-COCX(KS0070BP-32CC)
9. BACKLIGHT: LED
10. BEZEL IS TO BE PAINTED BLACK
11. ALL UNMARKED TOLERANCES: ±0. 3mm

DETAIL A:

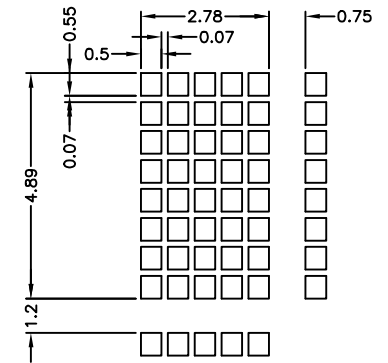

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM404ABCWU7-1	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM404ABCWU7-1G-1	UNIT: mm
CONFIRMED BY:	SHEET NO: OF	