



[Http://www.lcdfriends.com](http://www.lcdfriends.com)

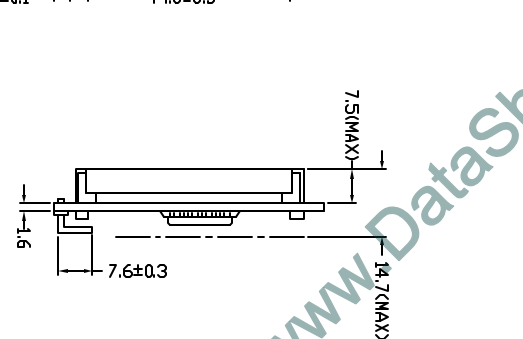

1	2	3	4	5	6	7	8	9	10	11	12
D1	FLM	M	CL1	CL2	NC	VDD	VSS	VEE	VD	LED+	LED-

DETAIL A:



- NOTES:
- | | |
|---------------------------|---------------------------|
| 1. DISPLAY TYPE: | FSTN |
| 2. VIEWING DIRECTION: | 6:00 |
| 3. POLARIZER MODE: | TRANSPARENT/POSITIVE |
| 4. DRIVE METHOD: | 1/64 DUTY 1/9 BIAS |
| 5. LCD OPERATING VOLTAGE: | 15.5V |
| 6. OPERATING TEMP: | 0°C+50°C |
| 7. STORAGE TEMP: | -20°C+60°C |
| 8. DRIVER: | S6B2086X01-T0RAK(S0086TQ) |
| 9. BACKLIGHT: | LED |
| 10. BEZEL COLOUR: | WHITE |
| 11. UNMARKED TOLERANCES: | ±0.3mm |



TIAN-MA MICROELECTRONICS CO.

22/F., HANEDU Building, Shenzhen Road, Centro, Shenzhen, China

DESIGN BY:	TITLE: TM48064ACC-1		 	
CHECKED BY:	DWG NO. G-1		SCALE	
APPROVED BY:			UNIT mm	
CONTROLLED BY:	DWG NAME: TM48064ACC-1S-1		SHEET NO. OF	