

RF AMPLIFIER

MODEL *TM5304*

Available as: TM5304, 4 Pin TO-8 (T4)
 TN5304, 4 Pin Surface Mount (SM3)
 FP5304, 4 Pin Flatpack (FP4)
 BX5304, Connectorized Housing (H1)

Features

- High Gain: 19.5 dB Typical
- Low Noise Figure: <2.5 dB Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 200 MHz	5 - 200 MHz
Gain (dB)	19.5	18.5 Min.
Power @ 1 dB Comp. (dBm)	+10.5	+9.5 Min.
Reverse Isolation (dB)	- 26	- 25 Max.
VSWR In	<1.75:1	2.0:1 Max.
Out	<1.5:1	2.0:1 Max.
Noise figure (dB)	<2.5	3.0 Max.
Power Vdc	+15	+15
mA	24	25 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +39 (Typ.)
 Second Order Two Tone Intercept Point +33 (Typ.)
 Third Order Two Tone Intercept Point +25 (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 17Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power 0.5 Watt
 (3 µsec Max.)

Typical Performance Data

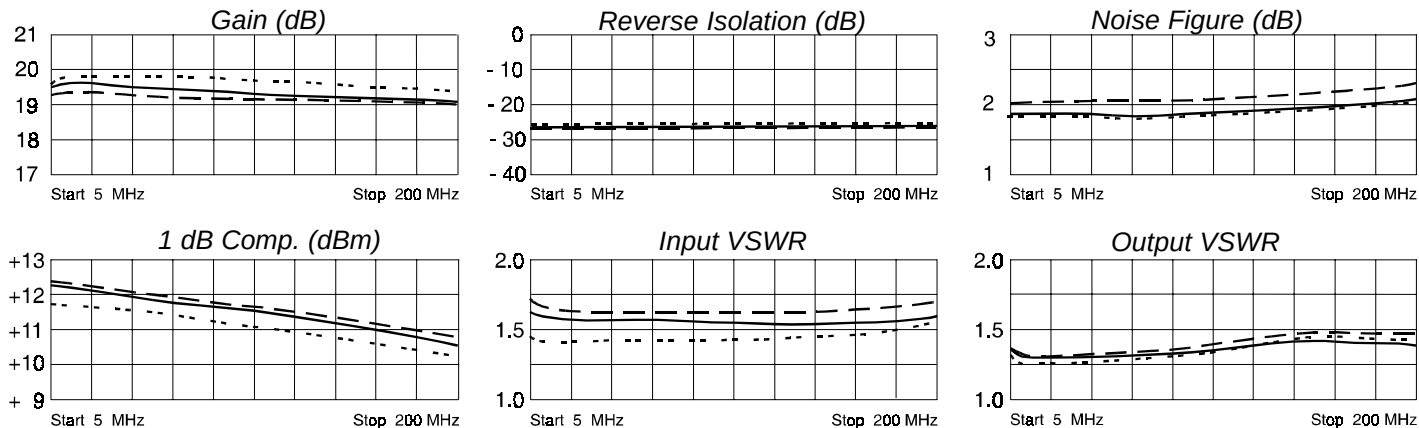

Legend ——— + 25 °C - - - + 85 °C -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.24	- 18	9.29	-173	.05	-172	.15	- 29
10	.23	- 14	9.37	180	.05	-179	.13	- 18
50	.22	- 32	9.27	160	.05	157	.13	- 19
100	.21	- 65	9.20	138	.05	137	.15	- 37
150	.21	-104	9.09	117	.05	111	.17	- 60
200	.24	-145	8.85	94	.05	89	.16	- 82
300	.37	150	7.82	45	.05	46	.07	-106

Amplifonix

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 • • • • FAX 215-464-4001 13/13/03
www.DataSheet4U.com