



液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

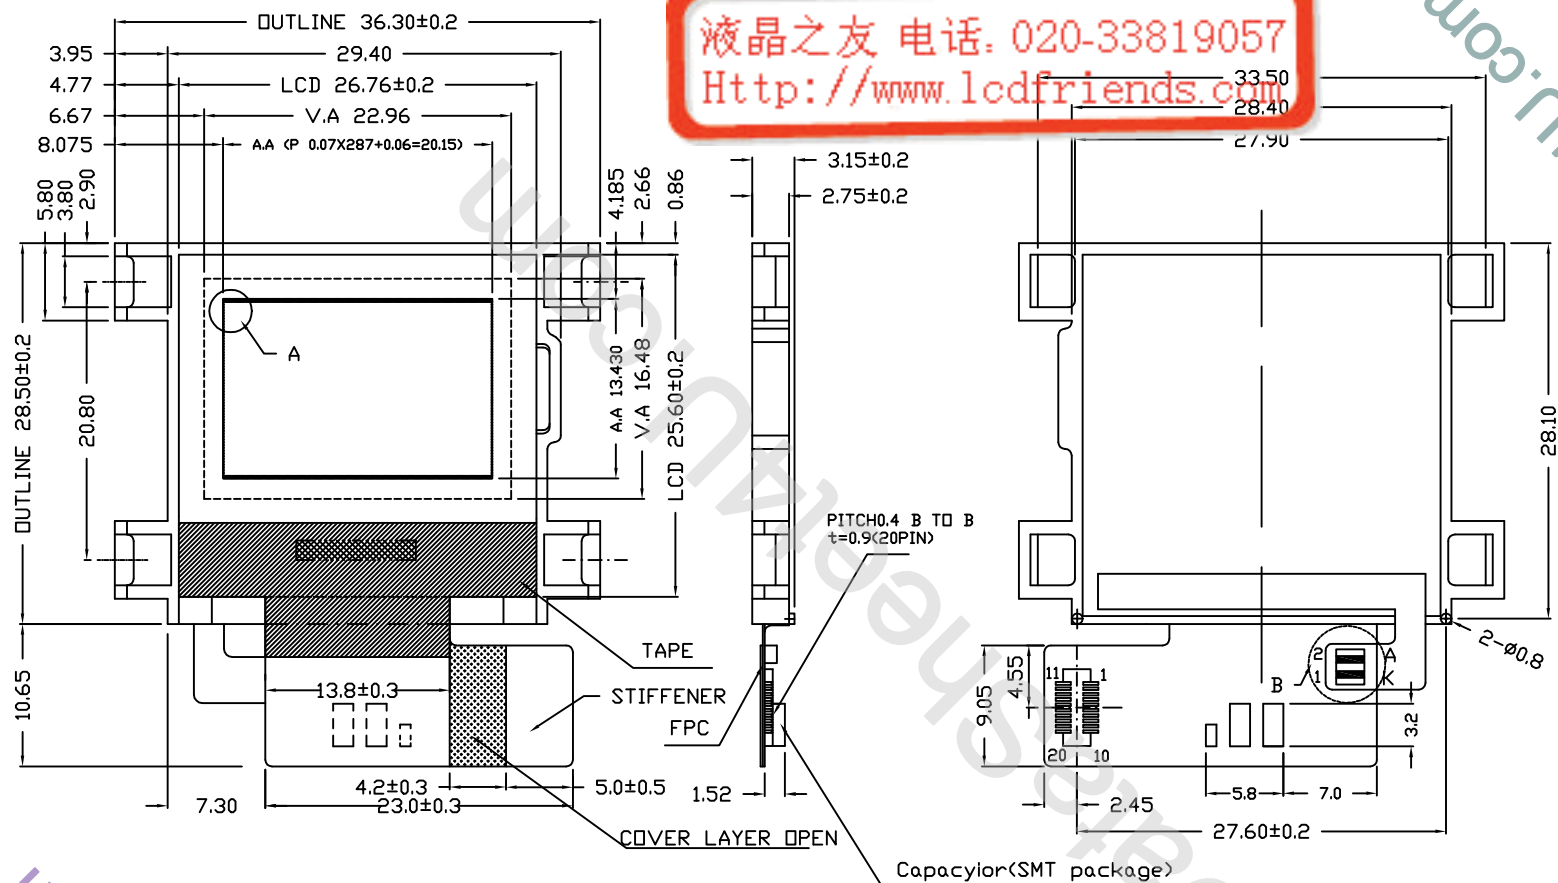

1	VDD
2	VDD
3	VSS
4	VSS
5	VSS
6	RD
7	WR
8	RS
9	CS0
10	RST
11	D0
12	D1
13	D2
14	D3
15	D4
16	D5
17	D6
18	D7
19	K
20	A

- 1 DISPLAY TYPE : CSTN
- 2 VIEWING DIRECTION: 6:00
- 3 POLARIZER MODE: TRANSMISSIVE/NEGATIVE
- 4 DRIVE METHOD : 1/64 DUTY 1/9 BIAS
- 5 LCD OPERATION VOLTAGE: 8.7V
- 6 RECOMMEND VDD=3.0V
- 7 OPERATION TEMP : -20°C--70°C
- 8 STORAGE TEMP: -30°C--80°C
- 9 IC : UC1682XGA
- 10 BACKLIGHT: LED(WHITE)
- 11 UNMARKED TOLERANCE: ±0.3mm

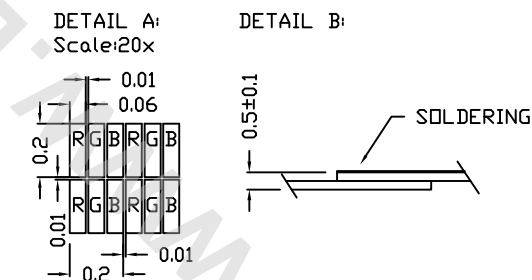

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM9664FKFWG1	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM9664FKFWG1 G-	
CONFIRMED BY:	SHEET NO: 1 OF 1	