

**MICROWAVE SEMICONDUCTOR
 TECHNICAL DATA**

TMD3438-1

FEATURES

- Suitable for WLL Subscriber/CPE
- High Power P1dB=29dBm(min)
- High Gain G1dB=29dB(min)
- High Linearity

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)


CHARACTERISTICS	SYMBOL	UNIT	RATINGS
Drain Supply Voltage	VDD	V	10
Gate Supply Voltage	VGG	V	-10
Input Power	Pin	dBm	10
Total Power Dissipation	PT	W	6
Flange Temperature	Tf	°C	-40 ~ +85
Storage Temperature	Tstg	°C	-65 ~ +150

RF PERFORMANCE SPECIFICATIONS (Ta=25 °C)


CHARACTERISTICS	SYMBOL	CONDITION	UNIT	MIN.	TYP.	MAX.
Operating Frequency	f		GHz	3.4	—	3.8
Output Power at 1dB Gain Compression Point	P1dB	VDD=7.5V VGG=-5.0V	dBm	29.0	—	—
Power Gain at 1dB Gain Compression Point	G1dB		dB	29.0	—	—
Noise Figure	NF		dB	—	8.0	9.0
Drain Current	IDD	@ Pin=-6dBm	mA	—	500	550
Input Return Loss	—	Small Signal Level	dB	10	—	—
Output Return Loss	—		dB	10	—	—

- ◆ The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- ◆ The information contained herein may be changed without prior notice. It is therefore advisable to contact TOSHIBA before proceeding with design of equipment incorporating this product.

Package Outline

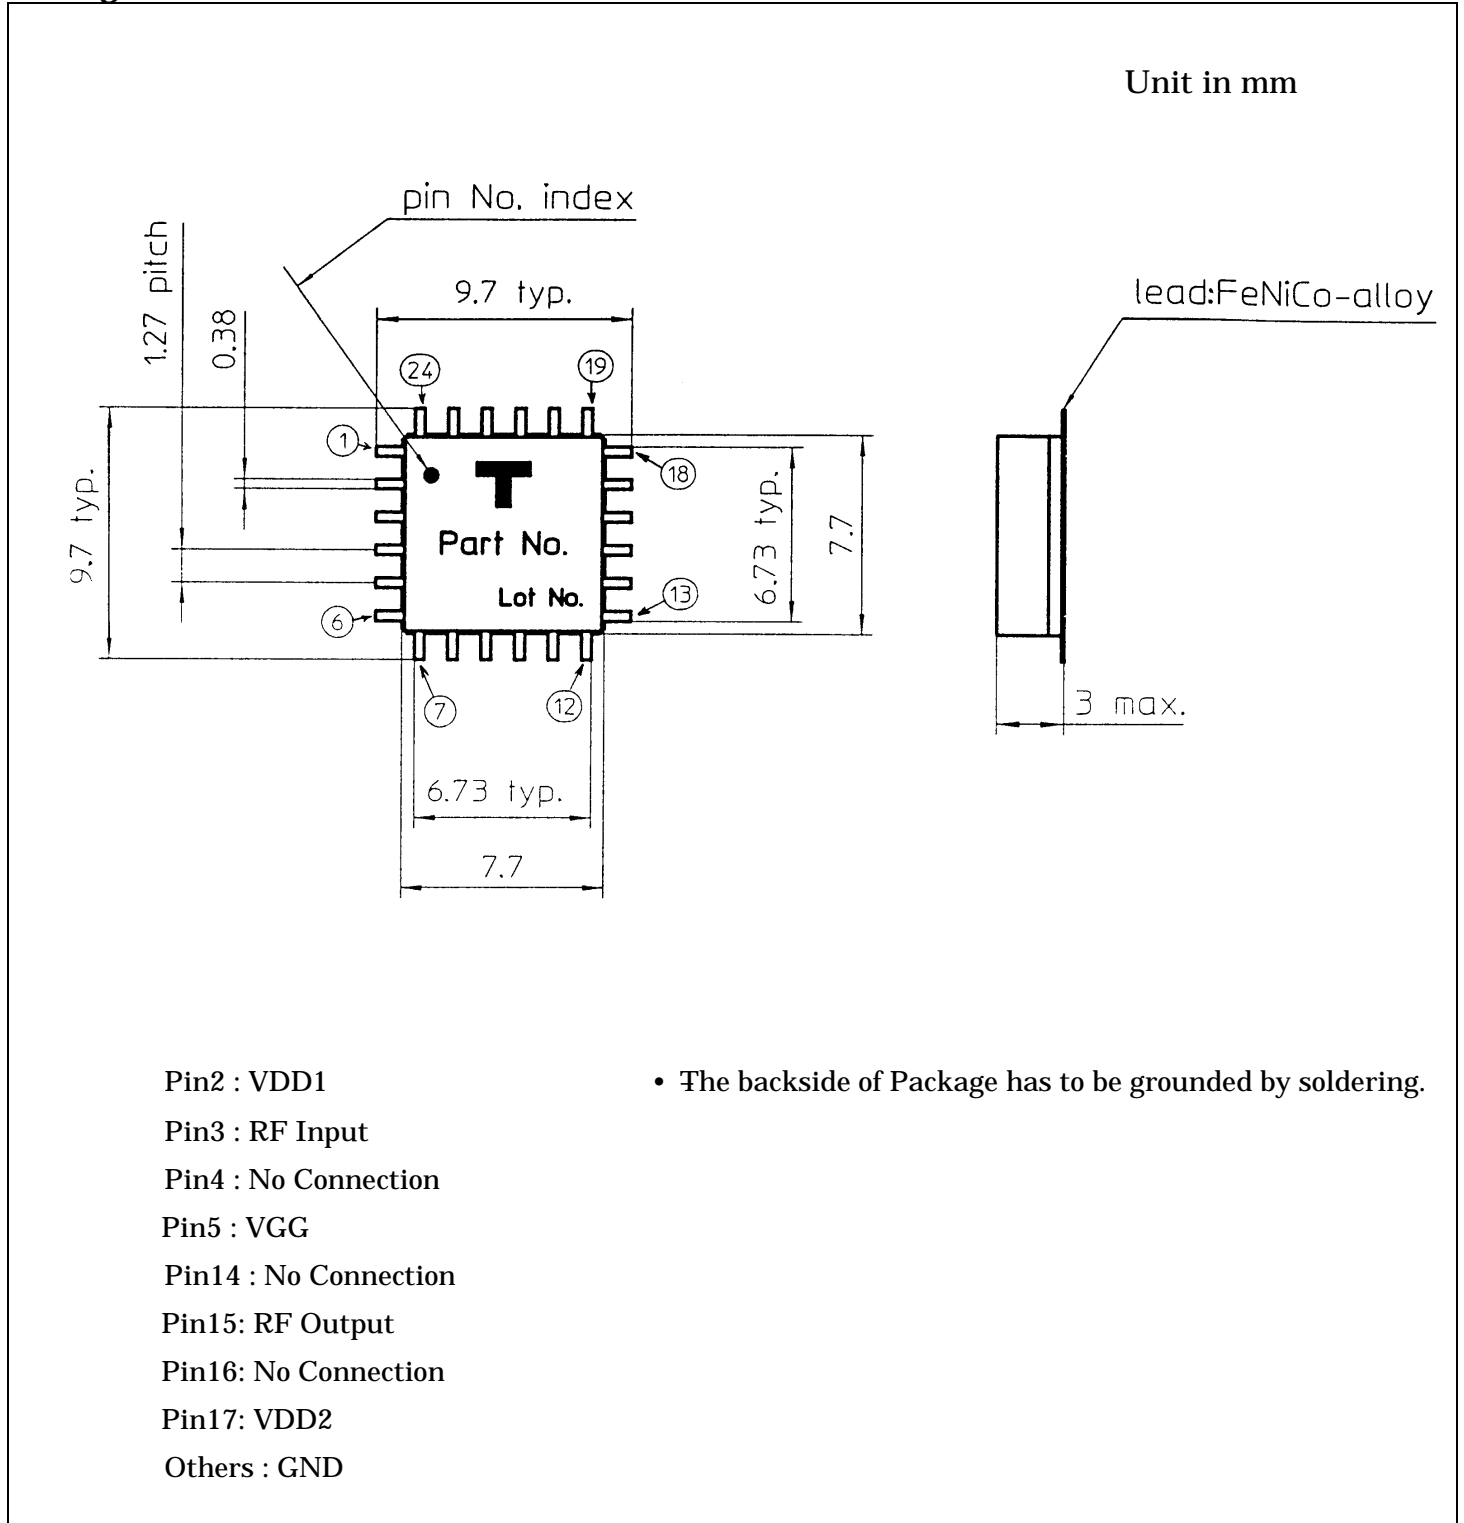


Recommended Bias Configuration

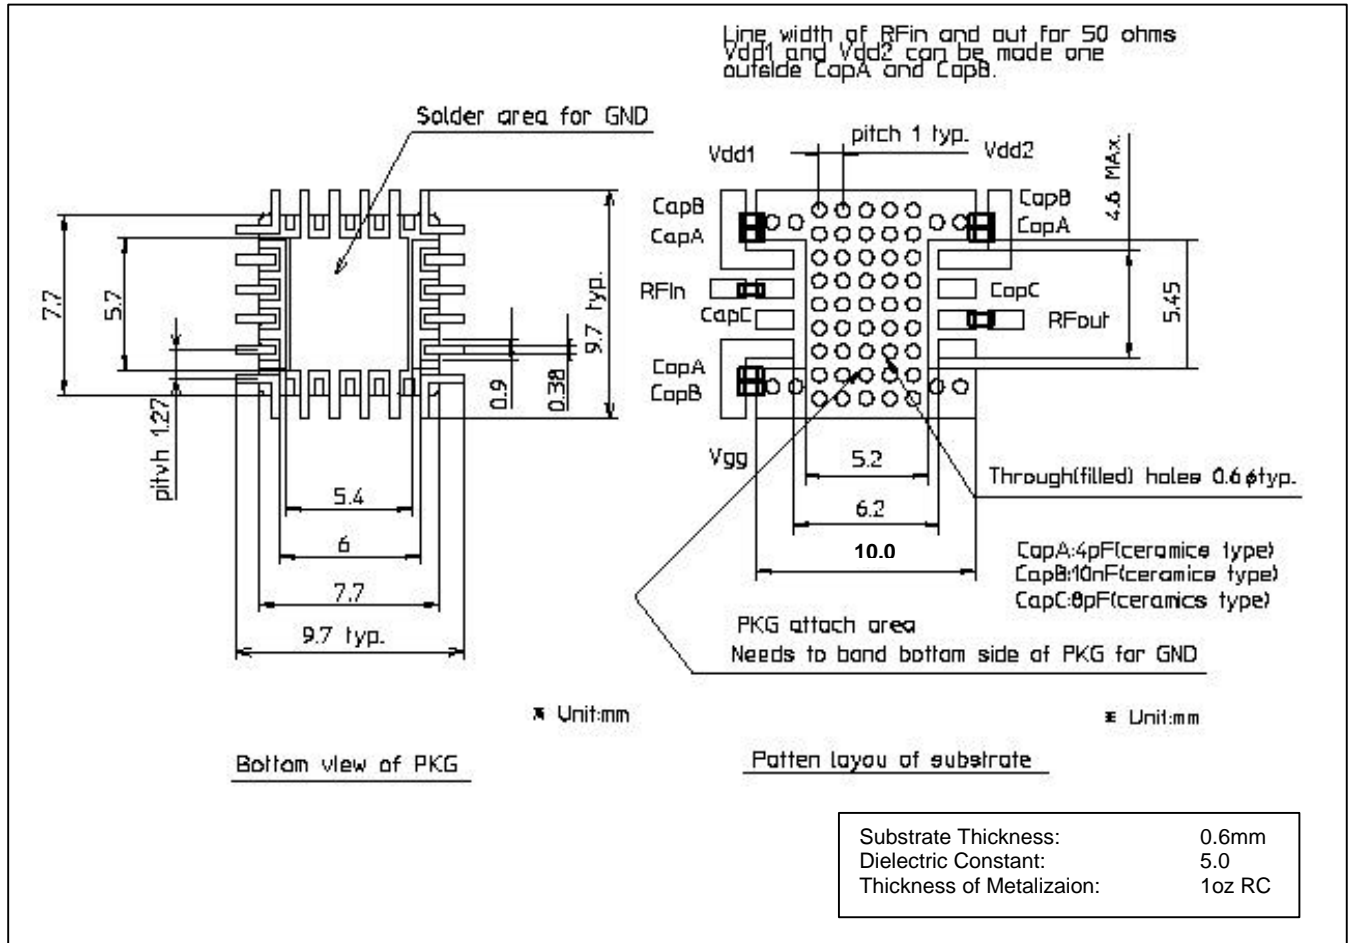

Mounting Recommendation

The backside of this package has to be grounded by soldering. The poor soldering will cause the electrical and thermal performance degradation. Toshiba recommends following reflow soldering profile.

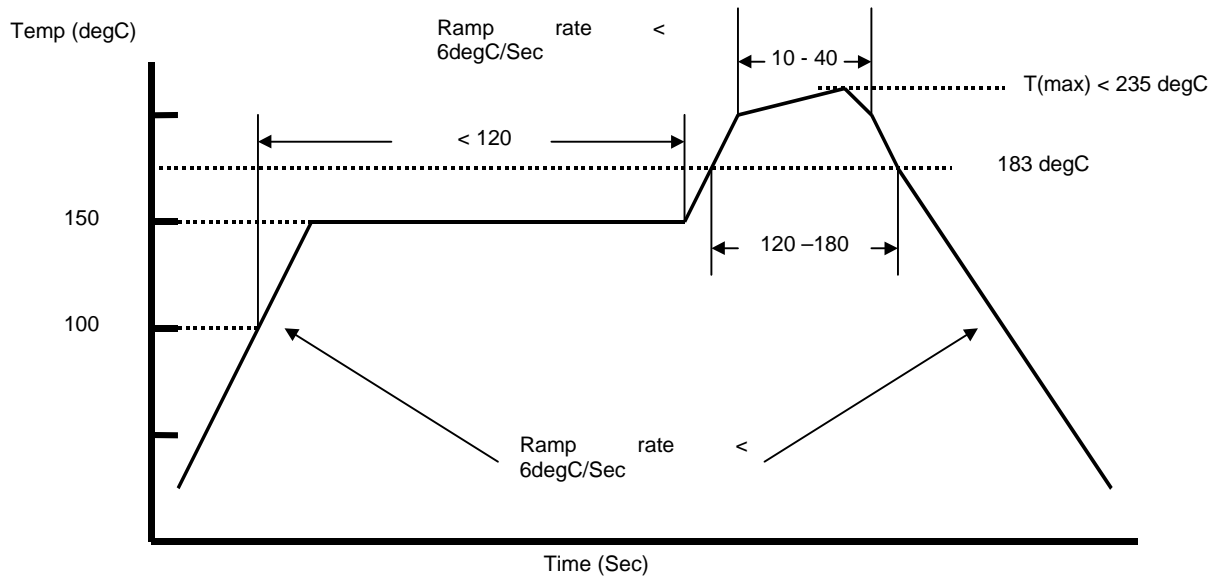

RF Performances

