

Features

- TTL INPUT COMPATIBLE
- 15 NS PROPOGATION DELAY TYP.
- 1 μ A MAX. INPUT CURRENT
- DRIVES 30 LS-TTL LOADS
- FULL PARALLEL LOAD ACCESS
- 3 STATE BUS-DRIVING OUTPUTS
- CLOCK/ENABLE INPUT HAS HYSTERESIS TO IMPROVE NOISE REJECTION
- MEETS OR EXCEEDS JEDEC STANDARD NUMBER 7

When the LATCH ENABLE input of the 373HCT series is high, the Q outputs will follow the D inputs. When the LATCH ENABLE goes low, data at the D inputs will be retained at the outputs until LATCH ENABLE returns high again. When a high logic level is applied to the OUTPUT CONTROL input, all outputs go to a high impedance state.

The 374HCT series are positive edge triggered flip-flops. Data at the D inputs, meeting the setup and hold time requirements, is transferred to the Q outputs on positive going transitions of the clock (CK) input. Application of a high level to the OUTPUT CONTROL (OC) input causes all outputs to go to a high impedance state.

Description


The 373 and 374 series octal latches and flip-flops use a 3 micron silicon gate P-well CMOS process. They are the ideal CMOS replacement for low power schottky with the ability to drive 30 LS-TTL loads in addition to possessing high noise immunity and low power consumption. These devices are ideally suited for interfacing with bus lines in a bus organized system. These 8 bit registers feature three-state outputs designed specifically for driving high capacitive or relatively low impedance loads. When driving a bus no interface or pull-up resistors are required.

Schmitt-trigger buffered inputs at the enable/clock lines simplify system design as AC and DC noise rejection is improved by typically 300 millivolts due to input hysteresis.

This 54HCT/74HCT family is pinout, function and speed compatible with the standard 54LS/74LS logic family. All inputs are protected from damage due to static discharge by internal clamps to V_{CC} and ground.


All unused inputs must be connected to an appropriate logic voltage level (either V_{CC} or GND).

Connection Diagram

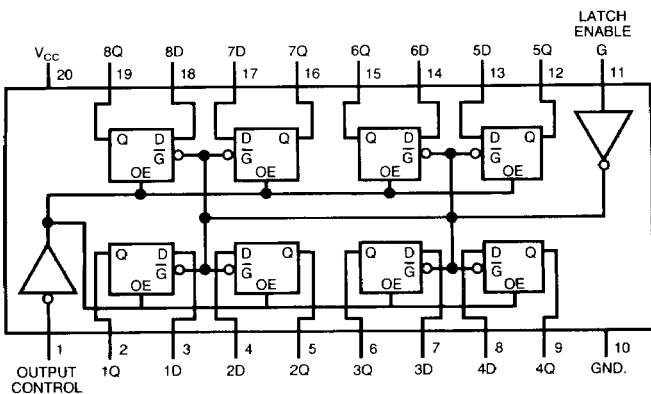

TMD54HCT373
TMD74HCT373

Connection Diagram

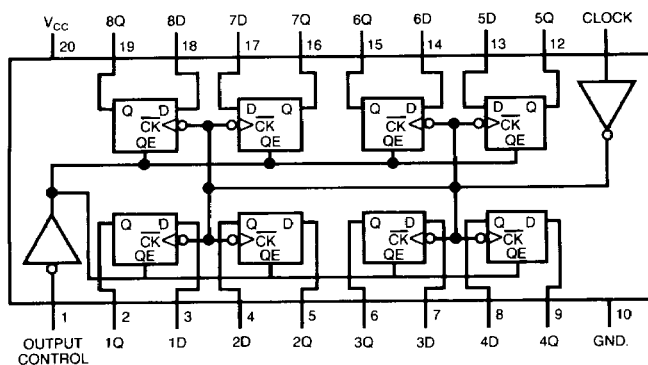

TMD54HCT374
TMD74HCT374

Absolute Maximum Ratings (Notes 1 & 2)

Supply Voltage (V_{CC})	-0.5 + 7.0V
DC Input Voltage (V_{IN})	- .5 to $V_{CC} + .5V$
DC Output Voltage (V_{OUT})	-0.5 to $V_{CC} + 0.5V$
Clamp Diode Current (I_{IK}, I_{OK})	± 50 mA
DC Output Current, per pin (I_{OUT})	± 50 mA
DC V_{CC} or GND Current, per pin (I_{CC})	± 100 mA
Latch up current	± 100 mA
Temperature Range (T_{STG})	-65°C to +150°C
Power Dissipation (P_D) (Note 3)	500 mW
Lead Temperature (T_L) (Soldering 10 seconds)	260°C

Operating Conditions

	Min	Max	Units
Supply Voltage (V_{CC})	4.5	5.5	V
DC Input or Output Voltage (V_{IN}, V_{OUT})	0	V_{CC}	V
Operating Temperature Range (T_A)			
74HCT	-40	+85	°C
54HCT	-55	+125	°C
Input Rise or Fall Times (t_r, t_f)		500	ns

DC Electrical Characteristics
 $V_{CC} = 5V \pm 10\%$ (unless otherwise specified)

Symbol	Parameter	Conditions	$T_A = 25^\circ C$		74HCT	54HCT	Units
			Typ	Guaranteed Limits		$T_A = -40$ to $85^\circ C$	
V_{IH}	Minimum High Level Input Voltage			2.0	2.0	2.0	V
V_{IL}	Maximum Low Level Input Voltage			0.8	0.8	0.8	V
V_{OH}	Minimum High Level Output Voltage	$V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} = 20 \mu A$ $ I_{OUT} = 6.0$ mA, $V_{CC} = 4.5V$ $ I_{OUT} = 15$ mA, $V_{CC} = 4.5V$	V_{CC}	$V_{CC}-0.1$	$V_{CC}-0.1$	$V_{CC}-0.1$	V
			4.3V	4.0	3.9	3.8	V
			4.0	3.7	3.5	3.3	V
V_{OL}	Maximum Low Level Voltage	$V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} = 20 \mu A$ $ I_{OUT} = 12$ mA, $ I_{OUT} = 24$ mA,	0	0.1	0.1	0.1	V
			0.2	0.4	0.4	0.4	V
			0.3	0.5	0.5	—	V
I_{IN}	Maximum Input Current	$V_{IN} = V_{CC}$ or GND		± 0.1	± 1.0	± 1.0	μA
I_{OZ}	Maximum 3-STATE Output Leakage Current	$V_{OUT} = V_{CC}$ or GND Enable = V_{IH} or V_{IL}		± 0.5	± 5.0	± 10	μA
I_{CC}	Maximum Quiescent Supply Current	$V_{IN} = V_{CC}$ or GND $I_{OUT} = 0 \mu A$		8.0	80	160	μA

Note 1: Absolute Maximum Ratings are those values beyond which damage to the device may occur.

Note 2: Unless otherwise specified all voltages are referenced to ground.

Note 3: Power Dissipation Temperature derating-plastic package: -12mW/°C from 65°C to 85°C; cerdip package: -12mW/°C from 100°C to 125°C.

AC Electrical Characteristics TMD54HCT373/TMD74HCT373

048230

 $V_{CC} = 4.5V$, $t_r = t_f = 6ns$ (unless otherwise specified) (see note 4)

Symbol	Parameter	Conditions	$T_A = 25^\circ C$		74HCT	54HCT	Units
			Typ	Guaranteed Limits		$T_A = -40 \text{ to } 85^\circ C$	
t_{PHL}, t_{PLH}	Maximum Propagation Delay Data to Output	$C_L = 50pF$ $C_L = 150pF$	13	20	25	28	ns
			19	26	33	37	ns
t_{PHL}, t_{PLH}	Maximum Propagation Delay Latch Enable to Output	$C_L = 50pF$ $C_L = 150pF$	15	25	30	33	ns
			20	33	40	44	ns
t_{PZH}, t_{PZL}	Maximum Enable Propagation Delay Control to Output	$C_L = 50pF$ $C_L = 150pF$ $R_L = 1 k\Omega$	14	24	29	33	ns
			19	32	39	44	ns
t_{PHZ}, t_{PLZ}	Maximum Disable Propagation Delay Control to Output	$C_L = 50 pF$ $R_L = 1 k\Omega$	23	30	34	37	ns
t_W	Minimum Clock Pulse Width			15	19	23	ns
t_S	Minimum Setup Time Data to Clock			0			ns
t_H	Minimum Hold Time Clock to Data			10	13	15	ns
C_{IN}	Maximum Input Capacitance		5	10	10	10	pF
C_{OUT}	Maximum Output Capacitance		10	20	20	20	pF

DataSheet4U.com

AC Electrical Characteristics TMD54HCT374/TMD74HCT374

048231

 $V_{CC} = 4.5V$, $t_r = t_f = 6ns$ (unless otherwise specified) (see note 4)

Symbol	Parameter	Conditions	$T_A = 25^\circ C$		74HCT	54HCT	Units
			Typ	Guaranteed Limits		$T_A = -40 \text{ to } 85^\circ C$	
f_{MAX}	Maximum Clock Frequency			35	30	25	MHz
t_{PHL}, t_{PLH}	Maximum Propagation Delay Clock to Output	$C_L = 50pF$ $C_L = 150pF$	15	26	31	34	ns
			20	35	41	45	ns
t_{PZH}, t_{PZL}	Maximum Enable Propagation Delay Control to Output	$C_L = 50pF$ $C_L = 150pF$ $R_L = 1 k\Omega$	14	24	29	33	ns
			19	32	39	44	ns
t_{PHZ}, t_{PLZ}	Maximum Disable Propagation Delay Control to Output	$C_L = 50 pF$ $R_L = 1 k\Omega$	23	30	34	37	ns
t_W	Minimum Clock Pulse Width			14	17	20	ns
t_S	Minimum Setup Time Data to Clock			20	24	28	ns
t_H	Minimum Hold Time Clock to Data			0			ns
C_{IN}	Maximum Input Capacitance		5	10	10	10	pF
C_{OUT}	Maximum Output Capacitance		10	20	20	20	pF

3

Note 4 Refer to JEDEC standard No. 7 for AC switching waveforms and test circuits.

Truth Tables '373

Output Control	Enable G	Data	373 Output	573 Output
L	H	H	H	L
L	H	L	L	H
L	L	X	Q ₀	Q ₀
H	X	X	Z	Z


H = high level, L = low level
 Q₀ = level of output before steady-state input conditions were established.
 Z = high impedance

'374

Output Control	Clock	Data	(374) Output	(534) Output
L	↑	H	H	L
L	↑	L	L	H
L	L	X	Q ₀	Q ₀
H	X	X	Z	Z


H = High Level, L = Low Level
 X = Don't Care
 ↑ = Transition from low-to-high
 Q₀ = The level of the output before steady state input conditions were established.

List Elem. 17

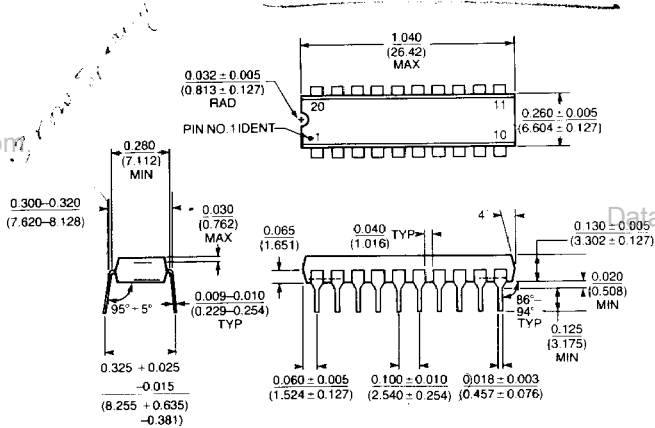

20-Pin Plastic

All dimensions in inches (millimeters)

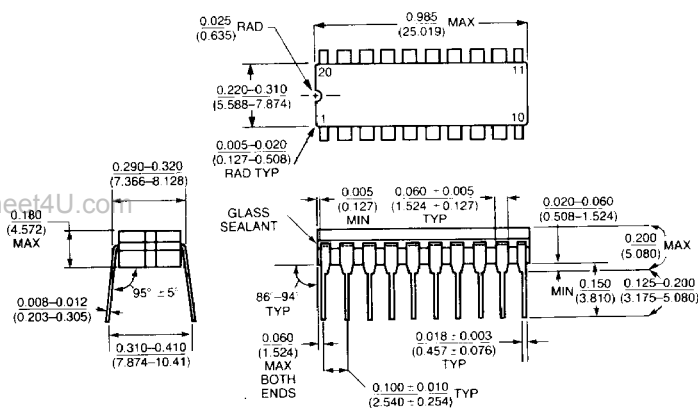

20-Pin Cerdip

Ordering Information

RANGE	PART NUMBER	TYPE	PACKAGE
INDUSTRIAL TEMP. RANGE	TMD74HCT373	OCTAL LATCH	20 PIN PLASTIC
	TMD74HCT374	FLIP-FLOP	20 PIN PLASTIC
MILITARY TEMP. RANGE	TMD54HCT373	OCTAL LATCH	20 PIN CERDIP
	TMD54HCT374	FLIP-FLOP	20 PIN CERDIP

*Cerchip order 100 supply } per many for Telmos
 100 supply } TELMOS
 5/22/84*

Unless expressly agreed in writing by an officer of Telmos, the products supplied by Telmos are not to be used in life support systems or in any other medical application intended for the support or the maintenance of human life.

Telmos assumes no responsibility for the use of any circuits described and makes no representations that they are free from patent infringement.