

TRIAC(Through Hole)

TMG1C60

(Sensitive Gate)


SanRex Triac TMG1C60 is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_{T(RMS)}=1A$
- High Surge Current
- Lead-Free Package

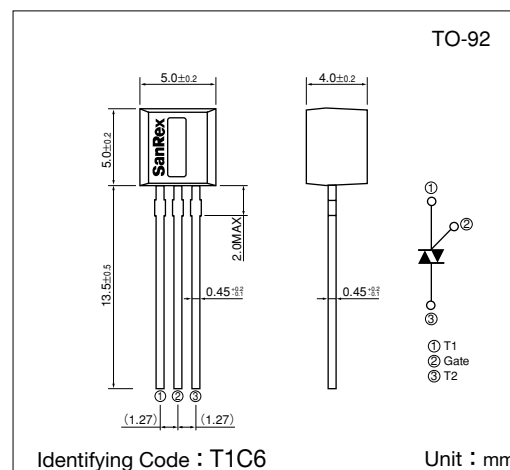

Maximum Ratings


($T_j=25^{\circ}C$ unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V_{DRM}	Repetitive Peak Off-State Voltage		600	V
$I_{T(RMS)}$	R.M.S. On-State Current	$T_c=58^{\circ}C$	1	A
I_{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	9.1/10	A
I^2t	I^2t (for fusing)		0.41	A^2S
P_{GM}	Peak Gate Power Dissipation		1	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.1	W
I_{GM}	Peak Gate Current		0.5	A
V_{GM}	Peak Gate Voltage		6	V
T_j	Operating Junction Temperature		$-40 \sim +125$	$^{\circ}C$
T_{stg}	Storage Temperature		$-40 \sim +150$	$^{\circ}C$
	Mass		0.2	g


Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit	
			Min.	Typ.	Max.		
IDRM	Repetitive Peak Off-State Current	VD=VDRM, Single phase, half wave, Tj=125°C			0.5	mA	
VTM	Peak On-State Voltage	IT=1.5A, Inst. measurement			1.6	V	
IGT1 ⁺	1	VD=6V, RL=10 Ω			5	mA	
IGT1 ⁻	2				5		
IGT3 ⁺	3				10		
IGT3 ⁻	4				5		
VGT1 ⁺	1		Gate Trigger Voltage			1.8	V
VGT1 ⁻	2					1.8	
VGT3 ⁺	3					2.0	
VGT3 ⁻	4					1.8	
VGD	Non-Trigger Gate Voltage	Tj=125°C, VD=½VDRM	0.2			V	
(dv/dt)c	Critical Rate of Rise of Off-State Voltage at Commutation	Tj=125°C, (di/dt)c=−0.5A/ms, VD=⅔VDRM	2			V/μs	
IH	Holding Current			4		mA	
Rth(i-c)	Thermal Resistance	Junction to case			50	°C/W	


Trigger mode of the triac

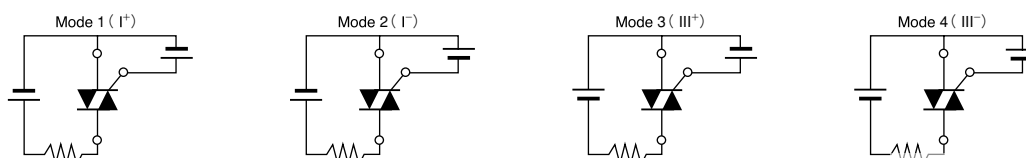


Gate Characteristics

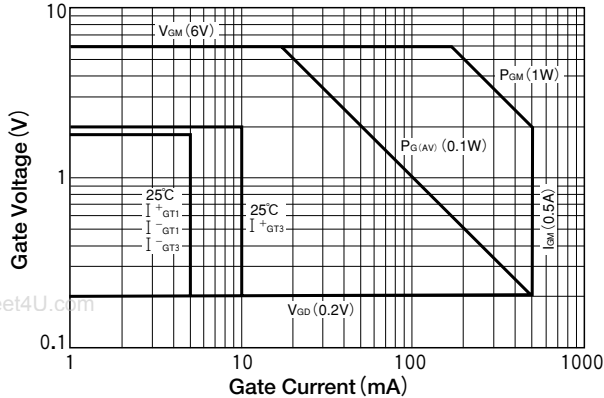


On-State Characteristics (MAX)

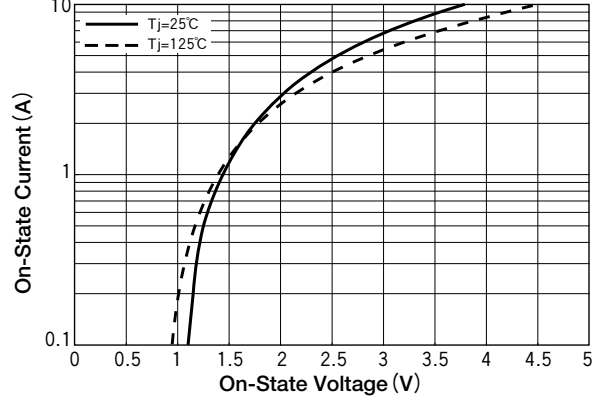


R.M.S. On-State Current vs Maximum Power Dissipation

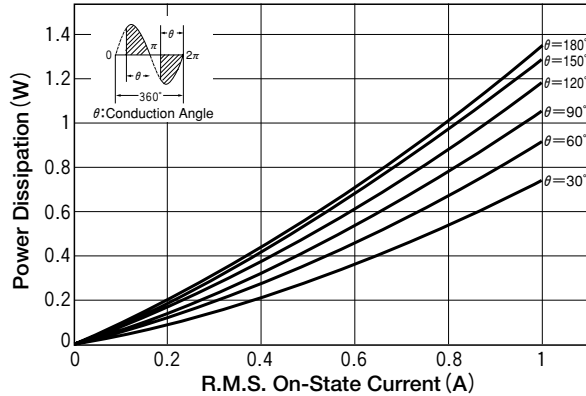


R.M.S. On-State vs Allowable Case Temperature

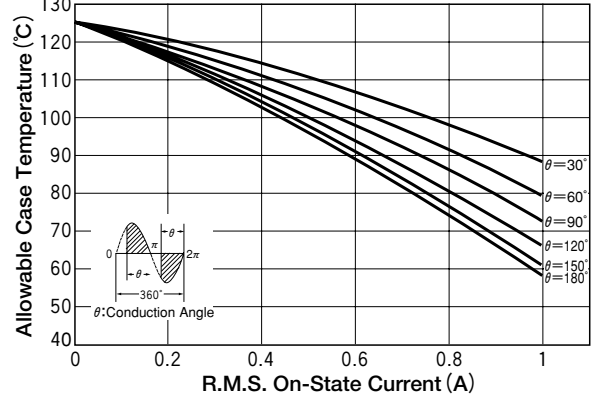


Surge On-State Current Rating (Non-Repetitive)

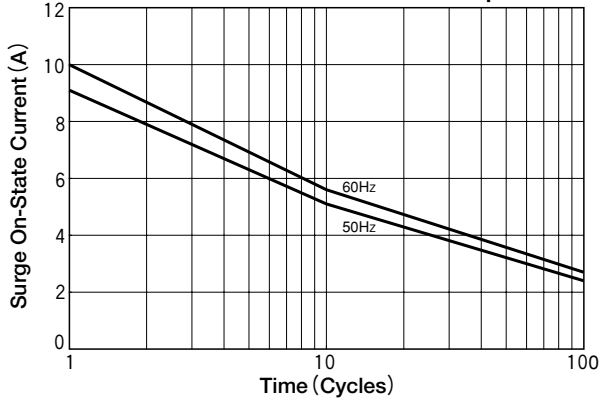

Transient Thermal Impedance

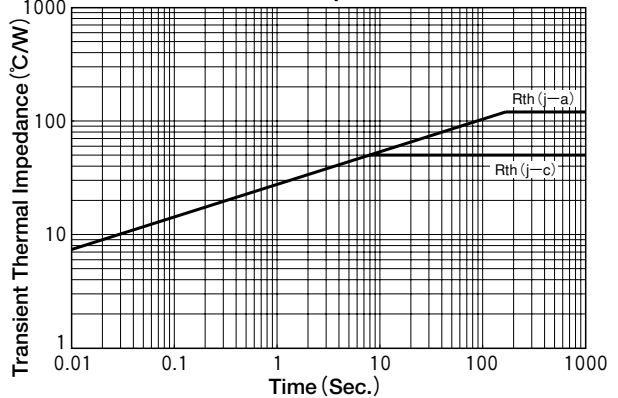

$I_{GT} - T_J$ (Typical)

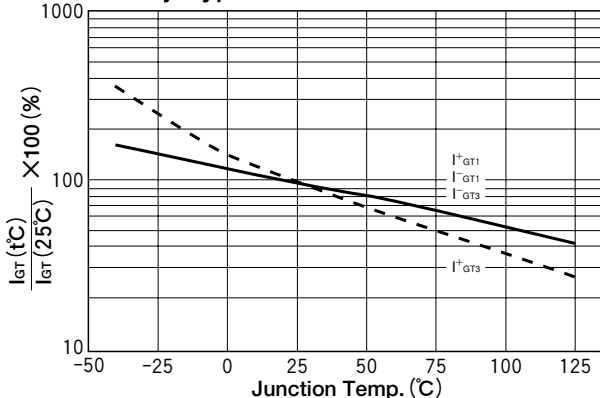

$V_{GT} - T_J$ (Typical)

