

TRIAC(Through Hole / Isolated)

TMG3D60F

(Sensitive Gate)


SanRex Triac TMG3D60F is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_T(RMS)=3A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

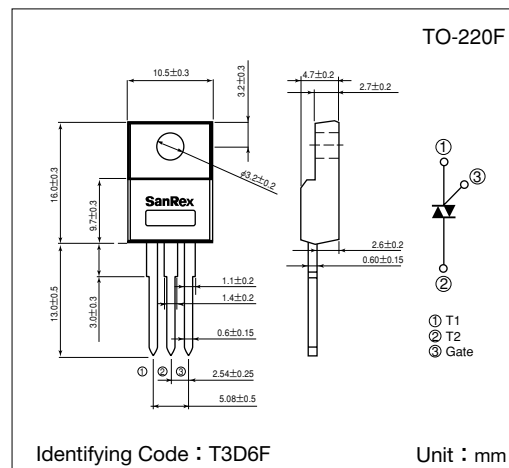

Maximum Ratings


($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V_{DRM}	Repetitive Peak Off-State Voltage		600	V
$I_T(RMS)$	R.M.S. On-State Current	$T_c=107^\circ\text{C}$	3	A
I_{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	27/30	A
I^2t	I^2t (for fusing)		3.7	A^2S
PGM	Peak Gate Power Dissipation		1.5	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.1	W
I_{GM}	Peak Gate Current		1	A
V_{GM}	Peak Gate Voltage		7	V
V_{ISO}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1minute	1500	V
T_j	Operating Junction Temperature		$-40 \sim +125$	$^\circ\text{C}$
T_{stg}	Storage Temperature		$-40 \sim +150$	$^\circ\text{C}$
	Mass		2	g


Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit	
			Min.	Typ.	Max.		
IDRM	Repetitive Peak Off-State Current	VD=VDRM, Single phase, half wave, Tj=125°C			1	mA	
VTM	Peak On-State Voltage	IT=4.5A, Inst. measurement			1.4	V	
IGT1 ⁺	1	VD=6V, RL=10 Ω			5	mA	
IGT1 ⁻	2				5		
IGT3 ⁺	3				10		
IGT3 ⁻	4				5		
VGT1 ⁺	1		Gate Trigger Voltage			1.5	V
VGT1 ⁻	2					1.5	
VGT3 ⁺	3					2.0	
VGT3 ⁻	4					1.5	
VGD	Non-Trigger Gate Voltage	Tj=125°C, VD=½VDRM	0.2			V	
(dv/dt)c	Critical Rate of Rise of Off-State Voltage at Commutation	Tj=125°C, [di/dt)c=−1.5A/ms, VD=⅔VDRM	5			V/μs	
IH	Holding Current			2		mA	
Rth(i-c)	Thermal Resistance	Junction to case			5	°C/W	


Trigger mode of the triac

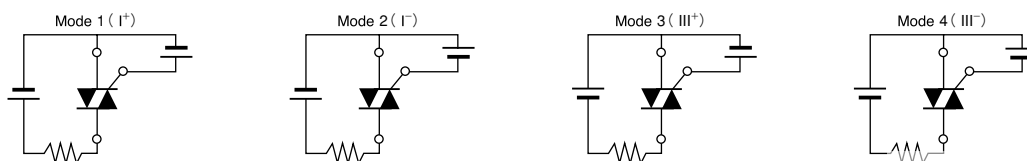


Gate Characteristics

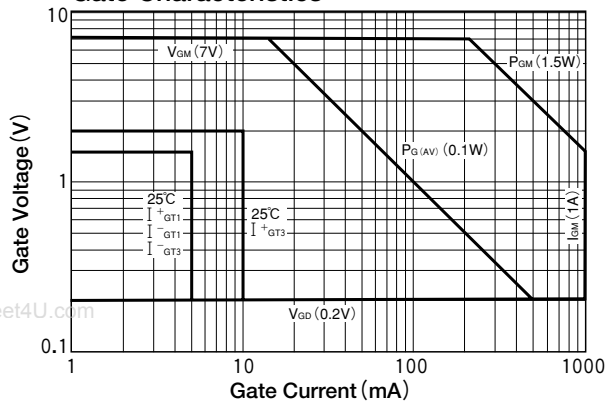


On-State Characteristics (MAX)

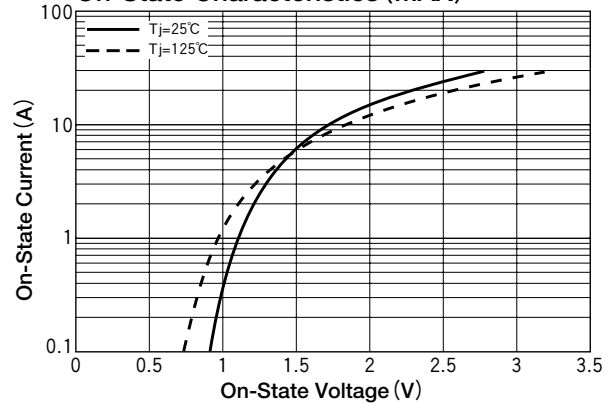


RMS On-State Current vs Maximum Power Dissipation

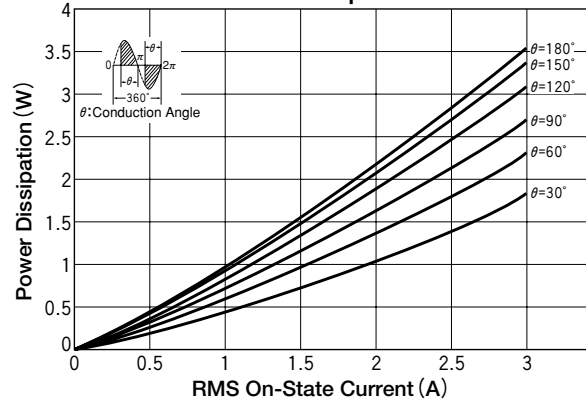


RMS On-State vs Allowable Case Temperature

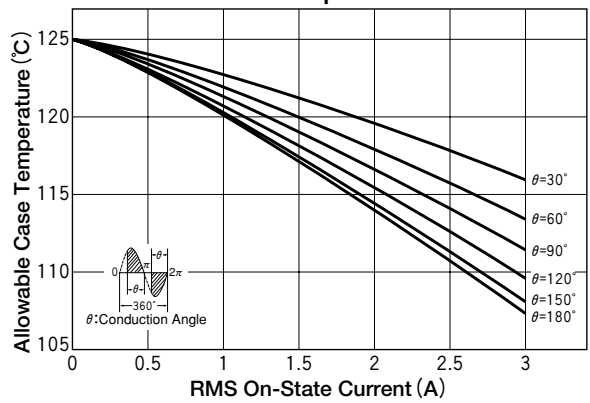


Surge On-State Current Rating (Non-Repetitive)

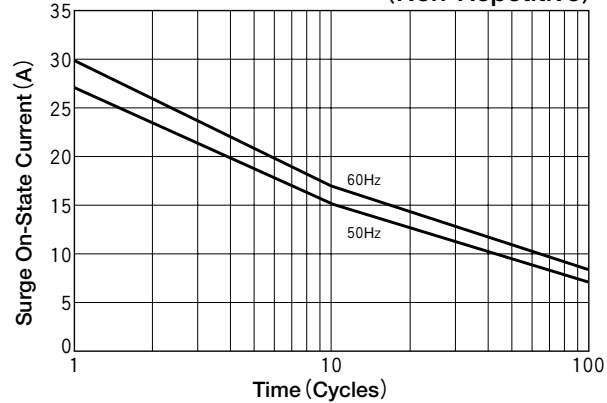

Transient Thermal Impedance

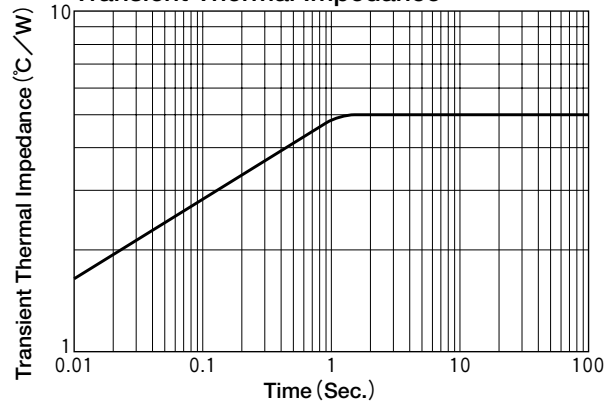

$I_{GT} - T_J$ (Typical)

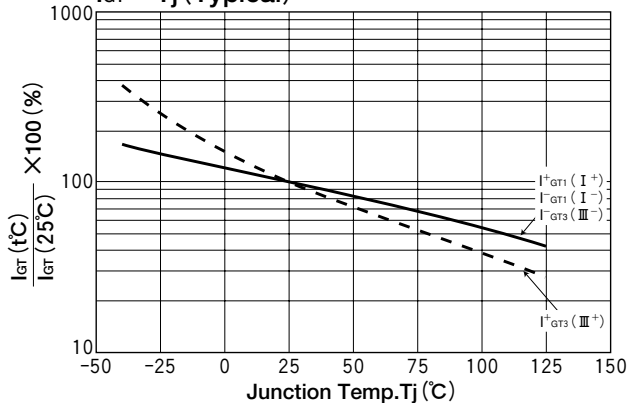

$V_{GT} - T_J$ (Typical)

