

TRIAC (ISOLATED TYPE)

TMG5C60F


TOP



UL;E76102 (M)

TMG5C40/60F are isolated mold triac suitable for wide range of applications like copier, microwave oven, solid state switch, motor control, light and heater control.

- $I_T(\text{RMS})$ 5A
- High surge capability 55A
- Full molded isolated type

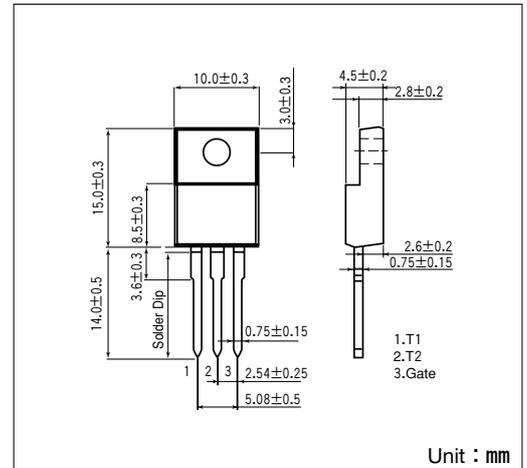

Maximum Ratings

($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Item	Ratings		Unit
		TMG5C40F	TMG5C60F	
V_{DRM}	Repetitive Peak Off-State Voltage	400	600	V

Symbol	Item	Conditions	Ratings	Unit
$I_{\text{T(RMS)}}$	R.M.S. On-State Current	$T_c=100^\circ\text{C}$	5	A
I_{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, peak, non-repetitive	50/55	A
I^2t	I^2t		12.6	A^2S
P_{GM}	Peak Gate Power Dissipation		3	W
$P_{\text{G(AV)}}$	Average Gate Power Dissipation		0.3	W
I_{GM}	Peak Gate Current		2	A
V_{GM}	Peak Gate Voltage		10	V
V_{ISO}	Isolation Breakdown Voltage (R.M.S.)	A.C.1 minute	1500	V
T_j	Operating Junction Temperature		-40 to +125	$^\circ\text{C}$
T_{stg}	Storage Temperature		-40 to +125	$^\circ\text{C}$
	Mass		2	g

Electrical Characteristics

Symbol	Item	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current	$V_D=V_{\text{DRM}}$, Single phase, half wave, $T_j=125^\circ\text{C}$			1	mA
V_{TM}	Peak On-State Voltage	$I_T=7\text{A}$, Inst. measurement			1.4	V
I_{GT1}^+	Gate Trigger Current	$V_D=6\text{V}$, $R_L=10\Omega$	1		20	mA
I_{GT1}^-			2		20	
I_{GT3}^+			3		—	
I_{GT3}^-			4		20	
V_{GT1}^+	Gate Trigger Voltage	$V_D=6\text{V}$, $R_L=10\Omega$	1		1.5	V
V_{GT1}^-			2		1.5	
V_{GT3}^+			3		—	
V_{GT3}^-			4		1.5	
V_{GD}	Non-Trigger Gate Voltage	$T_j=125^\circ\text{C}$, $V_D=1/2V_{\text{DRM}}$	0.2			V
$(dv/dt)_c$	Critical Rate of Rise off-State Voltage at commutation	$T_j=125^\circ\text{C}$, $(di/dt)_c=-2.5\text{A/ms}$, $V_D=2/3V_{\text{DRM}}$	5			$\text{V}/\mu\text{s}$
I_{H}	Holding Current			10		mA
$R_{\text{th(j-c)}}$	Thermal Impedance	Junction to case			4.0	$^\circ\text{C}/\text{W}$

