

TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT FLOATING-POINT DIGITAL SIGNAL PROCESSOR KNOWN GOOD DIES

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

- **SMJ: QML Processing to MIL-PRF-38535**
- **TMP: Commercial Level Processing**
- **Operating Temperature Ranges:**
 - Military (M) –55°C to 125°C
 - Commercial (C) –25°C to 85°C
 - Commercial (L) 0°C to 70°C
- **Highest Performance Floating-Point Digital Signal Processor (DSP)**
 - 'C40-50:
 - 40-ns Instruction Cycle Time:
 - 50 MFLOPS, 25 MIPS, 275 MOPS,
 - 320 MBps
 - 'C40-40:
 - 50-ns Instruction Cycle Time:
 - 40 MFLOPS, 20 MIPS, 220 MOPS,
 - 256 MBps
- **Six Communications Ports**
- **6-Channel Direct Memory Access (DMA) Coprocessor**
- **Single-Cycle Conversion to and From IEEE-745 Floating-Point Format**
- **Single Cycle $1/x$, $1/\sqrt{x}$**
- **Source-Code Compatible With SMJ320C30**
- **Validated Ada Compiler**
- **Single-Cycle 40-Bit Floating-Point, 32-Bit Integer Multipliers**
- **12 40-Bit Registers, 8 Auxiliary Registers, 14 Control Registers, and 2 Timers**
- **IEEE Standard 1149.1† Test-Access Port (JTAG)**
- **Two Identical External Data and Address Buses Supporting Shared Memory Systems and High Data-Rate, Single-Cycle Transfers:**
 - High Port-Data Rate of 100 MBytes/s (Each Bus)
 - 16G-Byte Continuous Program/Data/Peripheral Address Space
 - Memory-Access Request for Fast, Intelligent Bus Arbitration
 - Separate Address-, Data-, and Control-Enable Pins
 - Four Sets of Memory-Control Signals Support Different Speed Memories in Hardware
- **Fabricated Using Enhanced Performance Implanted CMOS (EPIC™) Technology by Texas Instruments (TI™)**
- **Separate Internal Program, Data, and DMA Coprocessor Buses for Support of Massive Concurrent Input/Output (I/O) of Program and Data Throughput, Maximizing Sustained Central Processing Unit (CPU) Performance**
- **On-Chip Program Cache and Dual-Access/Single-Cycle RAM for Increased Memory-Access Performance**
 - 512-Byte Instruction Cache
 - 8K Bytes of Single-Cycle Dual-Access Program or Data RAM
 - ROM-Based Bootloader Supports Program Bootup Using 8-, 16-, or 32-Bit Memories Over Any One of the Communications Ports

description

The TMP/SMJ320C40KGD DSP is a 32-bit, floating-point processor manufactured in 0.72- μ m, double-level metal CMOS technology. It is the fourth generation of DSPs from Texas Instruments, and it is the world's first DSP designed for parallel processing. The on-chip parallel processing capabilities of the 'C40 make the floating-point performance required by many applications achievable and cost-effective.

The TMP/SMJ320C40 is the first DSP with on-chip communication ports for processor-to-processor communication using simple communication software with no external hardware. This allows connectivity with no external glue logic. The communication ports remove I/O bottlenecks, and the independent smart-DMA coprocessor is able to handle the CPU I/O requirements.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

† IEEE Standard 1149.1–1990 Standard Test-Access Port and Boundary-Scan Architecture
EPIC and TI are trademarks of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

Copyright © 2001, Texas Instruments Incorporated
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT FLOATING-POINT DIGITAL SIGNAL PROCESSOR KNOWN GOOD DIES

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

description (continued)

The features of the communication ports are:

- Six communication ports for direct interprocessor communication and processor I/O
- 20 MBps bidirectional interface on each communication port for high-speed and low-cost multiprocessor interface
- Separate input and output first-in, first-out (FIFO) buffers for I/O and processor-to-processor communication
- Automatic arbitration and handshaking for direct processor-to-processor connection

The DMA coprocessor allows concurrent I/O and CPU processing for superior sustained CPU performance. The key features of the DMA coprocessor:

- Link pointers that allow DMA channels to auto-initialize
- Parallel CPU operation and DMA transfers
- Six DMA channels support communication-port-to-memory data transfers

The TMP/SMJ320C40KGD CPU is configured for high-speed internal parallel processing. The key features of the CPU are:

- Eight operations/cycles
 - 40-/32-bit floating-point/integer multiply
 - 40-/32-bit floating-point/integer arithmetic and logic unit (ALU) operation
 - Two data accesses
 - Two address-register updates
- IEEE floating-point conversion
- Division and square-root support
- 'C30 assembly language compatibility
- Byte and halfword accessibility

Key factors in a parallel-processing implementation are the development tools that are available. The 'C40 is supported by a host of parallel-processing development tools for developing and simulating code and for debugging parallel-processing systems. The code generation tools include:

- Optimizing ANSI C compiler with a runtime library that supports use of communication ports and DMA
- SPOX™, by Spectron Microsystems Incorporated, which provides parallel processing support as well as DMA and communication port drivers
- Assembler and linker with support for mapping program and data to parallel processors.

SPOX is a trademark of Spectron Microsystems, Inc.



POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

description (continued)

The simulation tools include:

- Parallel DSP system-level simulation, by Logic Modeling Corporation (LMC), which includes a hardware verification (HV) model and a full functional (FF) model
- TI software simulator with high-level language debugger interface for simulating a single processor

The hardware development and verification tools include:

- Parallel processor in-circuit emulator and high-level language debugger: XDS510™
- Parallel processor development system with four TMS320C40s, local and global memory, and communication port connections

For additional information when designing for cold temperature operation, please see Texas Instruments application report *320C3x, 320C4x and 320MCM42x Power-up Sensitivity at Cold Temperature*, literature number SGUA001.

known good die technology

Known good die (KGD) options are offered for use in multichip modules and chip-on-board (COB) applications. There are currently two verification technologies used at TI to support KGD requirements for the TMP/SMJ320C40KGD: Removable Tab (R-Tab), and Temporary Wire Bond (TWB).

The availability of selected DSP products in a tape-automated bond (TAB) configuration has made possible the use of a removable TAB technique. The TAB leadframe is attached to a gold-bumped die using modified bonding parameters. This technique allows easy removal of the tape after all needed 100% screens and parametric tests have been performed. The tape is removed from the tested part and the die is shipped in a conventional die container. The gold bumps remain on the bond pads, which allow for subsequent attachment of gold-ball bonds.

Similarly, with KGD using the TWB technique, bond wires are attached to the bond pads using adjusted bonding parameters which allow for easy removal of the die after all needed 100% screens and parametric tests have been performed. The die is removed from the temporary package and the die is shipped in a conventional die container.

visual inspection of known good die (KGD) using temporary wire bond (TWB) process

QML KGD devices produced using the TWB technology do not optically meet MIL-STD-883E (Method 2010, paragraph 3.1.1.1.h) metal bond pad visual inspection criterion due to the bond pad marks formed during bonding removal process. However, these devices have been reliably bonded using normal wire bond processes, and pass bond strength evaluations.

electrical specifications

For military electrical and timing specifications, please refer to the *SMJ320C40 Digital Signal Processor* data sheet, literature number SGUS017. For commercial electrical and timing specifications, see the *TMS320C40 Digital Signal Processor Data Sheet*, literature number SPRS038.

XDS510 is a trademark of Texas Instruments Incorporated.



TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT FLOATING-POINT DIGITAL SIGNAL PROCESSOR KNOWN GOOD DIES

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

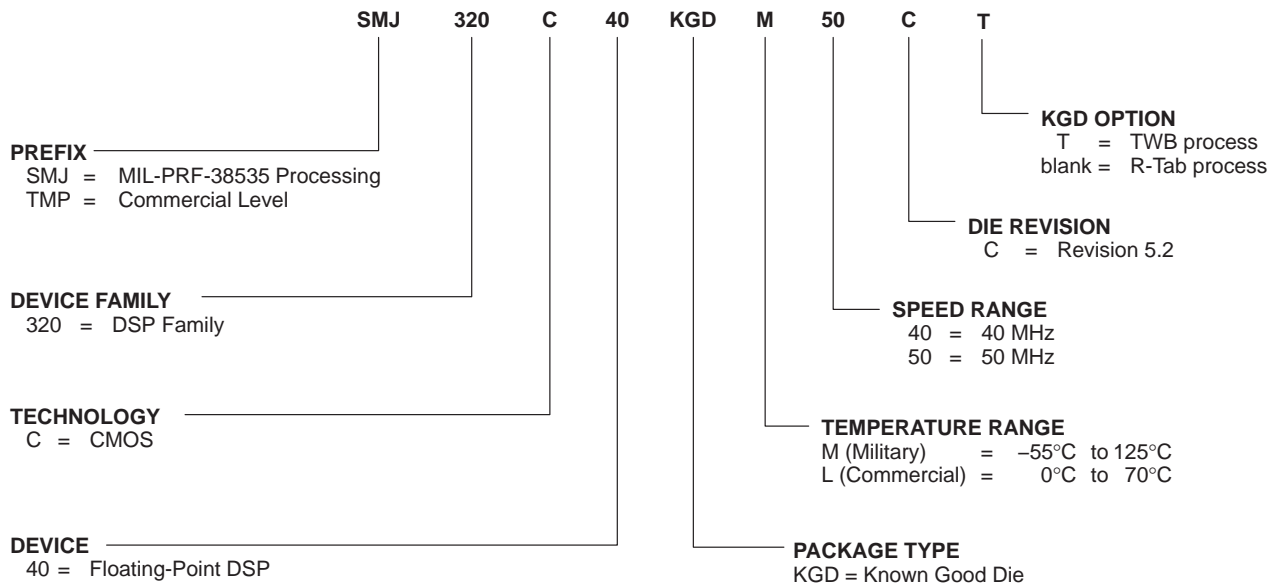
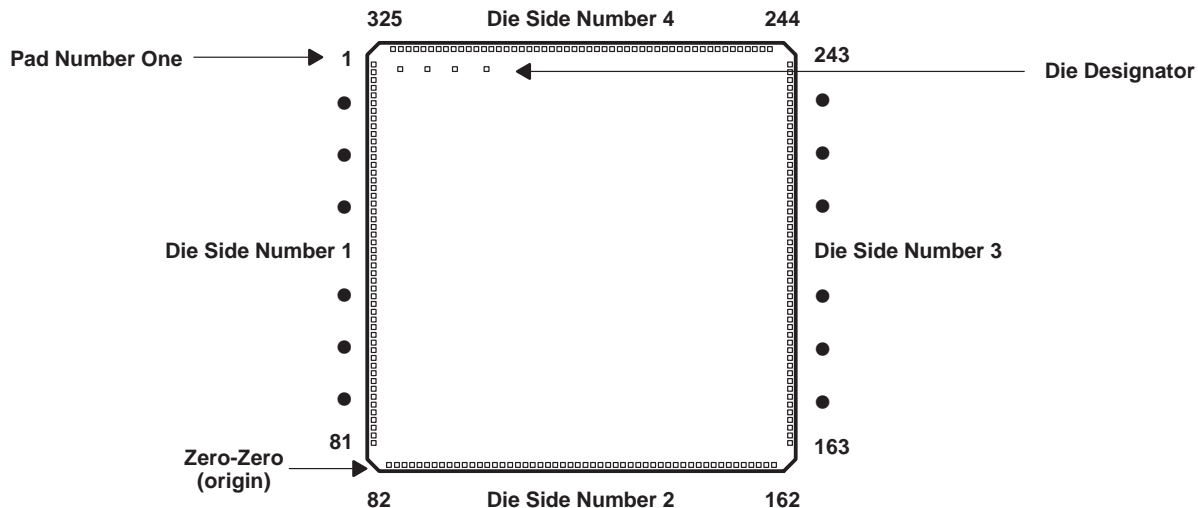


Figure 1. TMP/SMJ320C40KGD Device Nomenclature

JEDEC STANDARD

- Die thickness is approximately 15 mils ± 1 mil.
- Backside surface finish is silicon.
- Maximum allowable die junction operating temperature is 175°C.
- Glassivation material is compressive nitride.
- Bond pad metal is composed of copper-doped aluminum.
- Percent defective allowed for burned-in die is 5.
- Life test data is available.
- Configuration control notification.
- Group A attribute summary is available (SMJ only).
- Suggested die-attach material is silver glass (QMI 2569F).
- Suggested bond wire size is 1.25 mil.
- For gold bumped KGD die, suggested bonding method is gold-ball bonding.
- ESD rating is Class II.
- Maximum allowable peak process temperature for die-attach is 440°C ± 5°C (for QMS2569F)
- Saw kerf is dependent on blade size used.
- Die backside potential is left floating.

'320C40 (rev 5.2) known good die pad information



**Figure 2. '320C40 Die Numbering Format
(See Table 1)**

Table 1 provides a reference for the following:

- The 'C40 signal identities in relation to the pad numbers
- The 'C40 X,Y coordinates, where bond pad 82 serves as the origin (0,0)

In addition, the following notes are significant:

- A. X,Y coordinate data is in microns.
- B. The active silicon dimensions are 12424.86 μm \times 12035.52 μm (489.16 mils \times 473.83 mils).
- C. The die size is approximately 12598.40 μm \times 12192.00 μm (496.00 mils \times 480.00 mils).
- D. Bond pad dimensions are 108.00 μm \times 108.00 μm (4.25 mils \times 4.25 mils).
- E. Center of bond pad to edge of die min (without scribe) = 107.80 μm (4.24 mils).
- F. For R-Tab devices, gold bump dimensions are approximately 92 μm \times 92 μm (3.62 mils \times 3.62 mils).
- G. Coordinate origin is at (0,0) (center of bond pad 82).

**TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT
 FLOATING-POINT DIGITAL SIGNAL PROCESSOR
 KNOWN GOOD DIES**

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

Table 1. '320C40 Die Pad/TAB Lead Information : Rev. 5.2 (0,72 μm)

DIE SIDE #1				
C40 DIE BOND PAD LOCATIONS	DIE/TAB BOND PAD IDENTITY	X-COORDINATE OF DIE BOND PAD	Y-COORDINATE OF DIE BOND PAD	PITCH OF LEAD (#, #) REFERENCES WHICH DIE BOND PADS
1	D31	- 429.48	11368.44	126.00 (1, 2)
2	D30		11242.44	126.00 (2, 3)
3	D29		11116.44	126.00 (3, 4)
4	D28		10990.44	126.00 (4, 5)
5	D27		10864.44	126.00 (5, 6)
6	D26		10738.44	126.00 (6, 7)
7	GDDV _{DD}		10612.44	126.00 (7, 8)
8	D25		10486.44	126.00 (8, 9)
9	D24		10360.44	126.00 (9, 10)
10	D23		10234.44	126.00 (10, 11)
11	D22		10108.44	126.00 (11, 12)
12	D21		9982.44	126.00 (12, 13)
13	D20		9856.44	126.00 (13, 14)
14	D19		9730.44	126.00 (14, 15)
15	D18		9604.44	126.00 (15, 16)
16	D17		9478.44	126.00 (16, 17)
17	D16		9352.44	126.00 (17, 18)
18	CV _{SS}		9226.44	126.00 (18, 19)
19	IV _{SS}		9100.44	126.00 (19, 20)
20	GDDV _{DD}		8974.44	126.00 (20, 21)
21	DV _{SS}		8848.44	126.00 (21, 22)
22	D15		8722.44	126.00 (22, 23)
23	D14		8596.44	126.00 (23, 24)
24	D13		8470.44	126.00 (24, 25)
25	D12		8344.44	126.00 (25, 26)
26	D11		8218.44	126.00 (26, 27)
27	D10		8092.44	126.00 (27, 28)
28	D9		7966.44	126.00 (28, 29)
29	D8		7840.44	126.00 (29, 30)
30	D7		7714.44	126.00 (30, 31)
31	D6		7588.44	126.00 (31, 32)
32	D5		7462.44	126.00 (32, 33)
33	GDDV _{DD}		7336.44	126.00 (33, 34)
34	D4		7210.44	126.00 (34, 35)
35	D3		7084.44	126.00 (35, 36)
36	D2		6958.44	126.00 (36, 37)
37	D1		6832.44	126.00 (37, 38)
38	D0		6706.44	156.42 (38, 39)
39	CE ₁		6550.02	172.80 (39, 40)
40	RDY ₁		6377.22	152.10 (40, 41)
41	DV _{SS}		6225.12	126.00 (41, 42)
42	CV _{SS}		6099.12	126.00 (42, 43)



**TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT
FLOATING-POINT DIGITAL SIGNAL PROCESSOR
KNOWN GOOD DIES**

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

Table 1. '320C40 Die Pad/TAB Lead Information : Rev. 5.2 (0,72 μm) (Continued)

DIE SIDE #1 (CONTINUED)				
C40 DIE BOND PAD LOCATIONS	DIE/TAB BOND PAD IDENTITY	X-COORDINATE OF DIE BOND PAD	Y-COORDINATE OF DIE BOND PAD	PITCH OF LEAD (#, #) REFERENCES WHICH DIE BOND PADS
43	LOCK	- 429.48	5973.12	126.00 (43, 44)
44	V _{DDL}		5847.12	126.00 (44, 45)
45	V _{SSL}		5721.12	156.42 (45, 46)
46	CE0		5564.70	172.80 (46, 47)
47	RDY0		5391.90	172.80 (47, 48)
48	DE		5219.10	172.80 (48, 49)
49	TCK		5046.30	152.10 (49, 50)
50	TDO		4894.20	156.42 (50, 51)
51	TDI		4737.78	172.80 (51, 52)
52	TMS		4564.98	172.80 (52, 53)
53	TRST		4392.18	151.10 (53, 54)
54	EMU0		4240.08	126.00 (54, 55)
55	EMU1		4114.08	126.00 (55, 56)
56	DV _{SS}		3988.08	126.00 (56, 57)
57	DV _{DD}		3962.08	126.00 (57, 58)
58	PAGE1		3736.08	126.00 (58, 59)
59	R/W1		3610.08	126.00 (59, 60)
60	STRB1		3484.08	126.00 (60, 61)
61	STAT0		3358.08	126.00 (61, 62)
62	STAT1		3232.08	126.00 (62, 63)
63	IV _{SS}		3106.08	126.00 (63, 64)
64	STAT2		2980.08	126.00 (64, 65)
65	STAT3		2854.08	127.44 (65, 66)
66	PAGE0		2726.64	126.00 (66, 67)
67	R/W0		2600.64	126.00 (67, 68)
68	STRB0		2474.64	156.42 (68, 69)
69	AE		2318.22	174.24 (69, 70)
70	RESETLOC 1		2143.98	152.10 (70, 71)
71	DV _{DD}		1991.88	156.42 (71, 72)
72	RESETLOC 0		1835.46	172.80 (72, 73)
73	RESET		1662.66	172.80 (73, 74)
74	CRDY5	1510.56	126.00 (74, 75)	
75	CSTRB5	1384.56	126.00 (75, 76)	
76	CACK5	1258.56	126.00 (76, 77)	
77	CREQ5	1132.56	126.00 (77, 78)	
78	CRDY4	1006.56	126.00 (78, 79)	
79	CSTRB4	880.56	126.00 (79, 80)	
80	CACK4	754.56	126.00 (80, 81)	
81	CREQ4	628.56		



**TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT
 FLOATING-POINT DIGITAL SIGNAL PROCESSOR
 KNOWN GOOD DIES**

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

Table 1. '320C40 Die Pad/TAB Lead Information : Rev. 5.2 (0,72 μm) (Continued)

DIE SIDE #2				
C40 DIE BOND PAD LOCATIONS	DIE/TAB BOND PAD IDENTITY	X-COORDINATE OF DIE BOND PAD	Y-COORDINATE OF DIE BOND PAD	PITCH OF LEAD (#, #) REFERENCES WHICH DIE BOND PADS
82	CV _{SS}	0.00	0.00	1062.00 (82, 83)
83	DV _{SS}	1062.00		126.00 (83, 84)
84	DV _{DD}	1188.00		126.00 (84, 85)
85	C5D7	1314.00		126.00 (85, 86)
86	C5D6	1440.00		126.00 (86, 87)
87	C5D5	1566.00		126.00 (87, 88)
88	C5D4	1692.00		126.00 (88, 89)
89	C5D3	1818.00		126.00 (89, 90)
90	C5D2	1944.00		126.00 (90, 91)
91	C5D1	2070.00		126.00 (91, 92)
92	C5D0	2196.00		126.00 (92, 93)
93	DV _{DD}	2322.00		126.00 (93, 94)
94	C4D7	2448.00		126.00 (94, 95)
95	C4D6	2574.00		126.00 (95, 96)
96	C4D5	2700.00		126.00 (96, 97)
97	C4D4	2813.40		126.00 (97, 98)
98	C4D3	2952.00		126.00 (98, 99)
99	C4D2	3078.00		126.00 (99, 100)
100	C4D1	3204.00		126.00 (100, 101)
101	C4D0	3330.00		126.00 (101, 102)
102	CV _{SS}	3456.00		126.00 (102, 103)
103	DV _{SS}	3582.00		126.00 (103, 104)
104	DV _{DD}	3708.00		126.00 (104, 105)
105	C3D7	3834.00		126.00 (105, 106)
106	C3D6	3960.00		126.00 (106, 107)
107	C3D5	4086.00		126.00 (107, 108)
108	C3D4	4212.00		126.00 (108, 109)
109	C3D3	4338.00		126.00 (109, 110)
110	C3D2	4464.00		126.00 (110, 111)
111	C3D1	4590.00		126.00 (111, 112)
112	C3D0	4716.00		126.00 (112, 113)
113	DV _{DD}	4842.00		126.00 (113, 114)
114	IV _{SS}	4968.00		126.00 (114, 115)
115	C2D7	5094.00		126.00 (115, 116)
116	C2D6	5220.00		126.00 (116, 117)
117	C2D5	5346.00		126.00 (117, 118)
118	C2D4	5472.00		126.00 (118, 119)
119	C2D3	5598.00		126.00 (119, 120)
120	C2D2	5724.00		126.00 (120, 121)
121	C2D1	5850.00		126.00 (121, 122)
122	C2D0	5976.00		126.00 (122, 123)
123	CV _{SS}	6102.00		126.00 (123, 124)



**TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT
FLOATING-POINT DIGITAL SIGNAL PROCESSOR
KNOWN GOOD DIES**

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

Table 1. '320C40 Die Pad/TAB Lead Information : Rev. 5.2 (0,72 μm) (Continued)

DIE SIDE #2 (CONTINUED)				
C40 DIE BOND PAD LOCATIONS	DIE/TAB BOND PAD IDENTITY	X-COORDINATE OF DIE BOND PAD	Y-COORDINATE OF DIE BOND PAD	PITCH OF LEAD (#, #) REFERENCES WHICH DIE BOND PADS
124	DV _{SS}	6228.00	0.00	126.00 (124, 125)
125	DV _{DD}	6354.00		126.00 (125, 126)
126	<u>CRDY3</u>	6480.00		126.00 (126, 127)
127	<u>CSTRB3</u>	6606.00		126.00 (127, 128)
128	<u>CACK3</u>	6732.00		126.00 (128, 129)
129	<u>CREQ3</u>	6858.00		126.00 (129, 130)
130	V _{DDL}	6984.00		126.00 (130, 131)
131	V _{SSL}	7110.00		126.00 (131, 132)
132	<u>CRDY2</u>	7236.00		126.00 (132, 133)
133	<u>CSTRB2</u>	7362.00		126.00 (133, 134)
134	<u>CACK2</u>	7488.00		126.00 (134, 135)
135	<u>CREQ2</u>	7614.00		126.00 (135, 136)
136	DV _{DD}	7740.00		126.00 (136, 137)
137	<u>CRDY1</u>	7866.00		126.00 (137, 138)
138	<u>CSTRB1</u>	7992.00		126.00 (138, 139)
139	<u>CACK1</u>	8118.00		126.00 (139, 140)
140	<u>CREQ1</u>	8244.00		126.00 (140, 141)
141	<u>CRDY0</u>	8370.00		126.00 (141, 142)
142	<u>CSTRB0</u>	8496.00		126.00 (142, 143)
143	<u>CACK0</u>	8622.00		126.00 (143, 144)
144	<u>CREQ0</u>	8748.00		126.00 (144, 145)
145	CV _{SS}	8874.00		126.00 (145, 146)
146	DV _{SS}	9000.00		126.00 (146, 147)
147	IV _{SS}	9126.00		126.00 (147, 148)
148	DV _{DD}	9252.00		126.00 (148, 149)
149	C1D7	9378.00		126.00 (149, 150)
150	C1D6	9504.00		126.00 (150, 151)
151	C1D5	9630.00		126.00 (151, 152)
152	C1D4	9756.00		126.00 (152, 153)
153	C1D3	9882.00		126.00 (153, 154)
154	C1D2	10008.00		126.00 (154, 155)
155	C1D1	10134.00		126.00 (155, 156)
156	C1D0	10260.00	126.00 (156, 157)	
157	DV _{DD}	10386.00	126.00 (157, 158)	
158	C0D7	10512.00	126.00 (158, 159)	
159	C0D6	10638.00	126.00 (159, 160)	
160	C0D5	10764.00	126.00 (160, 161)	
161	C0D4	10890.00	126.00 (161, 162)	
162	C0D3	11016.00		



**TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT
 FLOATING-POINT DIGITAL SIGNAL PROCESSOR
 KNOWN GOOD DIES**

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

Table 1. '320C40 Die Pad/TAB Lead Information : Rev. 5.2 (0,72 μm) (Continued)

DIE SIDE #3				
C40 DIE BOND PAD LOCATIONS	DIE/TAB BOND PAD IDENTITY	X-COORDINATE OF DIE BOND PAD	Y-COORDINATE OF DIE BOND PAD	PITCH OF LEAD (#, #) REFERENCES WHICH DIE BOND PADS
163	C0D2	11779.74	810.00	126.00 (163, 164)
164	C0D1		936.00	126.00 (164, 165)
165	C0D0		1062.00	126.00 (165, 166)
166	CVSS		1188.00	126.00 (166, 167)
167	DVDD		1314.00	156.42 (167, 168)
168	ROMEN		1470.42	152.46 (168, 169)
169	IIOF0		1622.88	126.00 (169, 170)
170	DVSS		1748.88	126.00 (170, 171)
171	IIOF1		1874.88	126.00 (171, 172)
172	IIOF2		2000.88	126.00 (172, 173)
173	IIOF3		2126.88	156.42 (173, 174)
174	NMI		2283.30	152.10 (174, 175)
175	LSTRB0		2435.40	126.00 (175, 176)
176	LR/W0		2561.40	126.00 (176, 177)
177	LPAGE0		2687.40	156.42 (177, 178)
178	LRDY0		2843.82	172.80 (178, 179)
179	LCE0		3016.62	152.10 (179, 180)
180	LSTRB1		3168.72	126.00 (180, 181)
181	LR/W1		3294.72	126.00 (181, 182)
182	DVDD		3420.72	126.00 (182, 183)
183	CVSS		3546.72	126.00 (183, 184)
184	LPAGE1		3672.72	156.42 (184, 185)
185	LRDY1		3829.14	172.80 (185, 186)
186	LCE1		4001.94	172.80 (186, 187)
187	LDE		4174.74	152.10 (187, 188)
188	TCLK0		4326.84	126.00 (188, 189)
189	TCLK1		4452.84	126.00 (189, 190)
190	H3		4578.84	126.00 (190, 191)
191	H1		4704.84	156.42 (191, 192)
192	LAE		4861.26	152.10 (192, 193)
193	IVSS		5013.36	126.00 (193, 194)
194	LLOCK		5139.36	126.00 (194, 195)
195	LSTAT0		5265.36	126.00 (195, 196)
196	LSTAT1		5391.36	126.00 (196, 197)
197	LSTAT2		5517.36	126.00 (197, 198)
198	LSTAT3		5643.36	127.44 (198, 199)
199	IACK		5770.80	126.00 (199, 200)
200	VDDL		5896.80	126.00 (200, 201)
201	VSSL		6022.80	131.94 (201, 202)
202	X1		6154.74	171.58 (202, 203)
203	X2/CLKIN	6326.28	168.12 (203, 204)	
204	CVSS	6494.40	126.00 (204, 205)	



**TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT
FLOATING-POINT DIGITAL SIGNAL PROCESSOR
KNOWN GOOD DIES**

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

Table 1. '320C40 Die Pad/TAB Lead Information : Rev. 5.2 (0,72 μm) (Continued)

DIE SIDE #3 (CONTINUED)				
C40 DIE BOND PAD LOCATIONS	DIE/TAB BOND PAD IDENTITY	X-COORDINATE OF DIE BOND PAD	Y-COORDINATE OF DIE BOND PAD	PITCH OF LEAD (#, #) REFERENCES WHICH DIE BOND PADS
205	DV _{DD}	11779.74	6620.40	126.00 (205, 206)
206	DV _{SS}		6746.40	127.44 (206, 207)
207	LA30		6873.84	126.00 (207, 208)
208	LA29		6999.84	126.00 (208, 209)
209	LA28		7125.84	126.00 (209, 210)
210	LA27		7251.84	126.00 (210, 211)
211	LADV _{DD}		7377.84	126.00 (211, 212)
212	LA26		7503.84	126.00 (212, 213)
213	LA25		7629.84	126.00 (213, 214)
214	LA24		7755.84	126.00 (214, 215)
215	LA23		7881.84	126.00 (215, 216)
216	LA22		8007.84	126.00 (216, 217)
217	LA21		8133.84	126.00 (217, 218)
218	LA20		8259.84	126.00 (218, 219)
219	LA19		8385.84	126.00 (219, 220)
220	LA18		8511.84	126.00 (220, 221)
221	LA17		8637.84	126.00 (221, 222)
222	LA16		8763.84	126.00 (222, 223)
223	LADV _{DD}		8889.84	126.00 (223, 224)
224	CV _{SS}		9015.84	126.00 (224, 225)
225	DV _{SS}		9141.84	126.00 (225, 226)
226	LA15		9267.84	126.00 (226, 227)
227	LA14		9393.84	126.00 (227, 228)
228	LA13		9519.84	126.00 (228, 229)
229	LA12		9645.84	126.00 (229, 230)
230	LA11		9771.84	126.00 (230, 231)
231	LA10		9897.84	126.00 (231, 232)
232	LA9		10023.84	126.00 (232, 233)
233	LA8		10149.84	126.00 (233, 234)
234	LA7		10275.84	126.00 (234, 235)
235	LA6		10401.84	126.00 (235, 236)
236	LA5	10527.84	126.00 (236, 237)	
237	LA4	10653.84	126.00 (237, 238)	
238	LADV _{DD}	10779.84	126.00 (238, 239)	
239	LA3	10905.84	126.00 (239, 240)	
240	LA2	11031.84	126.00 (240, 241)	
241	LA1	11157.84	126.00 (241, 242)	
242	LA0	11283.84	205.92 (242, 243)	
243	DV _{SS}	11489.76		



**TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT
 FLOATING-POINT DIGITAL SIGNAL PROCESSOR
 KNOWN GOOD DIES**

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

Table 1. '320C40 Die Pad/TAB Lead Information : Rev. 5.2 (0,72 μm) (Continued)

DIE SIDE #4				
C40 DIE BOND PAD LOCATIONS	DIE/TAB BOND PAD IDENTITY	X-COORDINATE OF DIE BOND PAD	Y-COORDINATE OF DIE BOND PAD	PITCH OF LEAD (#, #) REFERENCES WHICH DIE BOND PADS
244	CV _{SS}	10953.72	11819.88	126.00 (244, 245)
245	LD31	10827.72		126.00 (245, 246)
246	LD30	10701.72		126.00 (246, 247)
247	LD29	10575.72		126.00 (247, 248)
248	LD28	10449.72		126.00 (248, 249)
249	LDDV _{DD}	10323.72		126.00 (249, 250)
250	LD27	10197.72		126.00 (250, 251)
251	LD26	10071.72		126.00 (251, 252)
252	LD25	9945.72		126.00 (252, 253)
253	LD24	9819.72		126.00 (253, 254)
254	LD23	9693.72		126.00 (254, 255)
255	LD22	9567.72		126.00 (255, 256)
256	LD21	9441.72		126.00 (256, 257)
257	LD20	9315.72		126.00 (257, 258)
258	LD19	9189.72		126.00 (258, 259)
259	LD18	9063.72		126.00 (259, 260)
260	LD17	8937.72		126.00 (260, 261)
261	LDDV _{DD}	8811.72		126.00 (261, 262)
262	CV _{SS}	8685.72		126.00 (262, 263)
263	DV _{SS}	8559.72		126.00 (263, 264)
264	IV _{SS}	8433.72		126.00 (264, 265)
265	LD16	8307.72		126.00 (265, 266)
266	LD15	8181.72		126.00 (266, 267)
267	LD14	8055.72		126.00 (267, 268)
268	LD13	7929.72		126.00 (268, 269)
269	LD12	7803.72		126.00 (269, 270)
270	LD11	7677.72		126.00 (270, 271)
271	LD10	7551.72		126.00 (271, 272)
272	LD9	7425.72		126.00 (272, 273)
273	LD8	7299.72		126.00 (273, 274)
274	LD7	7173.72		126.00 (274, 275)
275	LD6	7047.72		126.00 (275, 276)
276	LD5	6921.72		126.00 (276, 277)
277	LDDV _{DD}	6795.72		126.00 (277, 278)
278	LD4	6669.72		126.00 (278, 279)
279	LD3	6543.72	126.00 (279, 280)	
280	LD2	6417.72	126.00 (280, 281)	
281	LD1	6291.72	126.00 (281, 282)	
282	LD0	6165.72	127.62 (282, 283)	
283	V _{DDL}	6038.10	126.00 (283, 284)	
284	V _{SSL}	5912.10	126.00 (284, 285)	
285	CV _{SS}	5786.10	126.00 (285, 286)	



**TMP320C40KGDC, SMJ320C40KGDC, TMP320C40KGDCT, SMJ320C40KGDCT
FLOATING-POINT DIGITAL SIGNAL PROCESSOR
KNOWN GOOD DIES**

SGUS024C – MARCH 1997 – REVISED OCTOBER 2001

Table 1. '320C40 Die Pad/TAB Lead Information : Rev. 5.2 (0,72 μm) (Continued)

DIE SIDE #4 (CONTINUED)				
C40 DIE BOND PAD LOCATIONS	DIE/TAB BOND PAD IDENTITY	X-COORDINATE OF DIE BOND PAD	Y-COORDINATE OF DIE BOND PAD	PITCH OF LEAD (#, #) REFERENCES WHICH DIE BOND PADS
286	DV _{SS}	5660.10	11819.88	126.00 (286, 287)
287	A30	5534.10		126.00 (287, 288)
288	A29	5408.10		126.00 (288, 289)
289	A28	5282.10		126.00 (289, 290)
290	GADV _{DD}	5156.10		126.00 (290, 291)
291	A27	5030.10		126.00 (291, 292)
292	A26	4904.10		126.00 (292, 293)
293	A25	4778.10		126.00 (293, 294)
294	A24	4652.10		126.00 (294, 295)
295	A23	4526.10		126.00 (295, 296)
296	A22	4400.10		126.00 (296, 297)
297	A21	4274.10		126.00 (297, 298)
298	A20	4148.10		126.00 (298, 299)
299	A19	4022.10		126.00 (299, 300)
300	A18	3896.10		126.00 (300, 301)
301	A17	3770.10		126.00 (301, 302)
302	GADV _{DD}	3644.10		126.00 (302, 303)
303	CV _{SS}	3518.10		126.00 (303, 304)
304	DV _{SS}	3392.10		126.00 (304, 305)
305	A16	3266.10		126.00 (305, 306)
306	A15	3140.10		126.00 (306, 307)
307	A14	3014.10		126.00 (307, 308)
308	A13	2888.10		126.00 (308, 309)
309	A12	2762.10		126.00 (309, 310)
310	A11	2636.10		126.00 (310, 311)
311	A10	2510.10		126.00 (311, 312)
312	A9	2384.10		126.00 (312, 313)
313	A8	2258.10		126.00 (313, 314)
314	A7	2132.10		126.00 (314, 315)
315	A6	2006.10		126.00 (315, 316)
316	A5	1880.10		126.00 (316, 317)
317	A4	1754.10		126.00 (317, 318)
318	GADV _{DD}	1628.10	126.00 (318, 319)	
319	A3	1502.10	126.00 (319, 320)	
320	A2	1376.10	126.00 (320, 321)	
321	A1	1250.10	126.00 (321, 322)	
322	A0	1124.10	126.00 (322, 323)	
323	CV _{SS}	998.10	558.00 (323, 324)	
324	DV _{SS}	440.10	630.00 (324, 325)	
325	SUBS	- 189.90		



PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
5962-9466902Q9D	ACTIVE	XCEPT	KGD	0	25	TBD	Call TI	N / A for Pkg Type	-55 to 125		Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.