

CMOS 32-bit Micro-controller

TMP94C241BF**1. OUTLINE AND DEVICE CHARACTERISTICS**

TMP94C241B is high-speed advanced 32-bit micro-controller developed for controlling equipment which processes mass data.

TMP94C241B is a micro-controller which has a high-performance CPU (900/H2 CPU) and various built-in I/Os. And TMP94C241B is enhanced memory interface functions. TMP94C241B is housed in an 160-pin mini flat package.

Device characteristics are as follows :

- (1) CPU : 32-bit CPU (900/H2 CPU)
 - Compatible with TLCS-900, 900/L, 900/H's instruction code
 - Minimum instruction execution time : 50 ns (at 20 MHz)
 - Internal data bus : 32-bit
 - External data bus : 8/16/32-bit
- (2) Internal memory
 - Internal RAM : 2K-byte (can use for code section)
 - Internal ROM : None
- (3) Address space
 - 16M-byte linear address space (memory mapped I/O)
- (4) Micro DMA : 8 channels
 - Execution time : 250ns/4bytes (at 20 MHz, best case)
 - Terminal count output (4 channels)
- (5) Chip select output : 6 channels
- (6) DRAM Controller : 2 channels
 - Direct interface
 - Supported fast page mode
 - Supported 8-, 16- and 32-bit external data buses
- (7) Timer/Counter
 - 8-bit timer : 4 channels
 - 16-bit timer : 4 channels

980901EBP1

- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance/Handling Precautions.
- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

- (8) Serial interface : 2 channels
- (9) 10-bit A/D converter : 8 channels (with sample hold circuit)
- (10) 8-bit D/A converter : 2 channels (with CMOS-AMP)
- (11) Interrupt controller
 - 18 internal interrupts
 - 10 external interrupts
- (12) Watch dog timer
- (13) I/O port : 64 pins
- (14) Package : 160-pin QFP

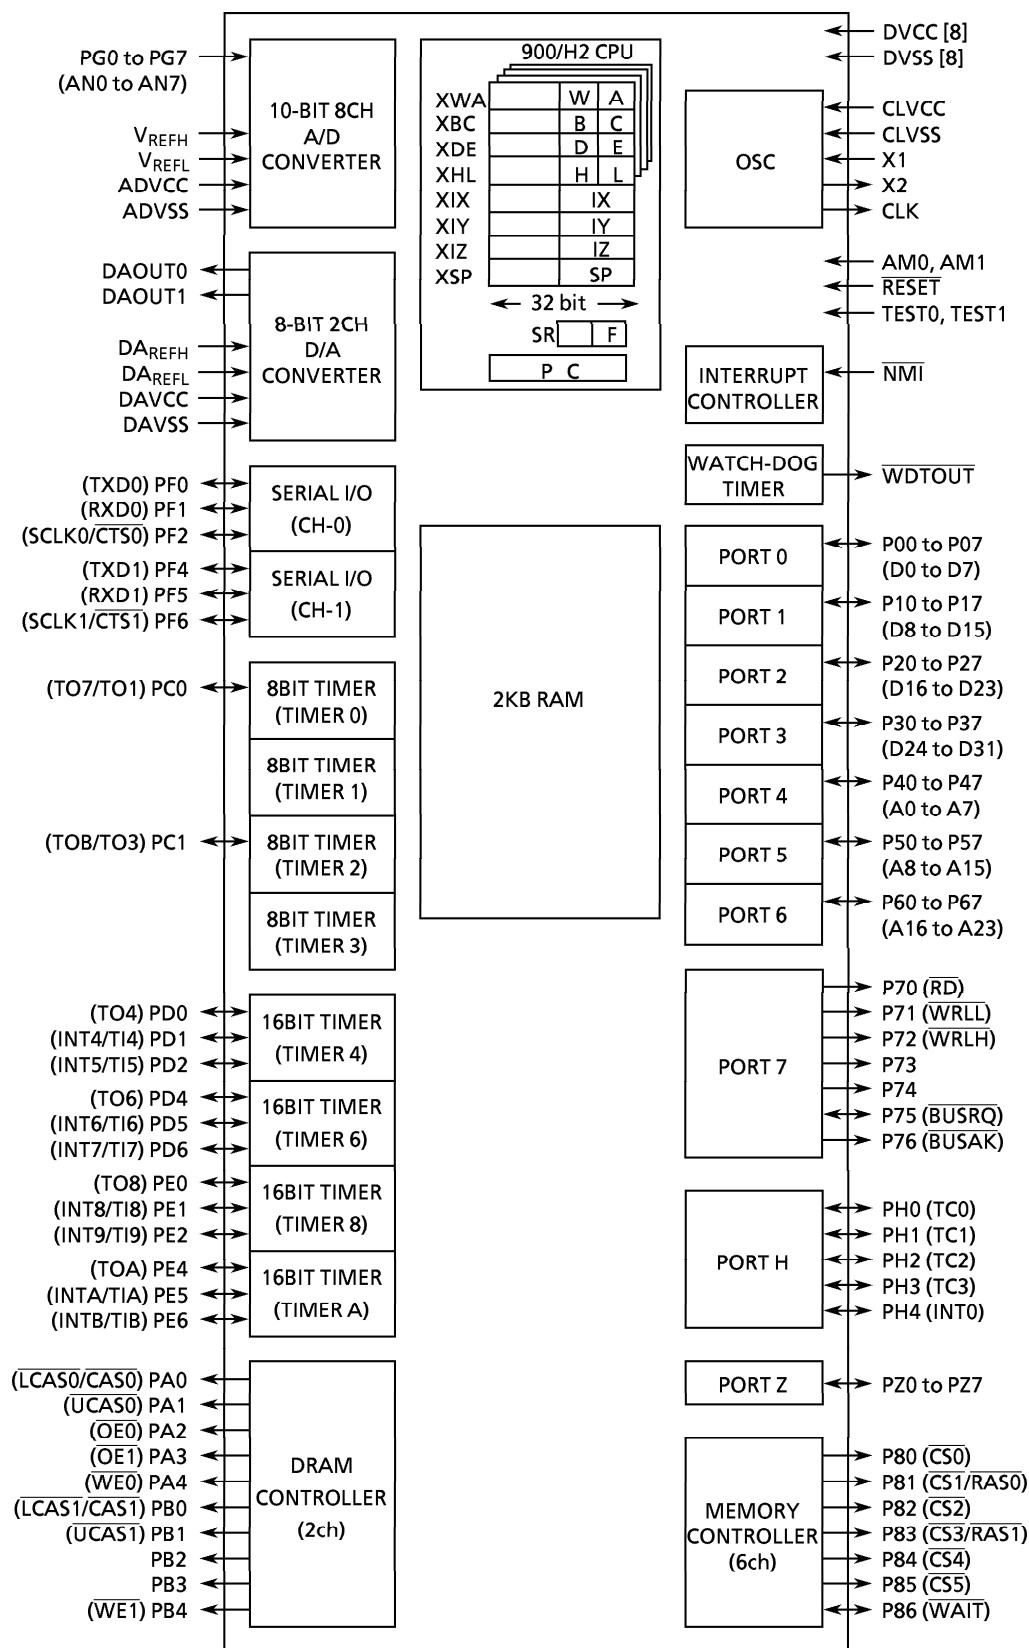


Figure 1 TMP94C241B Block Diagram