

TOL-503UYCD


Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-503UYCD	AlGaInP	Ultra Yellow	Yellow Diffused

Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 5mm diameter package.
- Long life, stable and reliable.
- RoHS compliant.

Dimensions

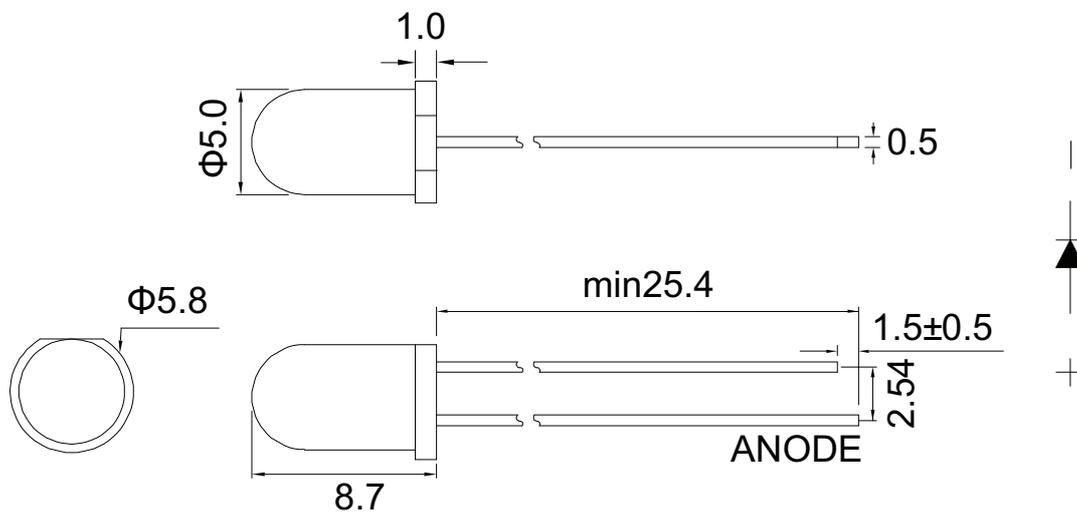

Notes:

1. All dimensions are in millimeter.
2. Tolerance is ± 0.25 mm unless otherwise noted.

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Power Dissipation (Tamb ≤ 60°C)	85	mW
Continuous Forward Current	20	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +80°C	
Storage Temperature Range	-40°C to +100°C	
Wave Soldering Profile For Lead-free Soldering	260°C for 5 Sec	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	Iv		316		mcd	I _F =20mA
Viewing Angle	2θ _{1/2}		30		deg	I _F =20mA
Dominant Wavelength	λ _d		590		nm	I _F =20mA
Peak Emission Wavelength	λ _p		595		nm	I _F =20mA
Spectral Line Half-Width	Δλ		15		nm	I _F =20mA
Forward Voltage	V _F		2.1		V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V

* Please refer to CIE 1931 chromaticity diagram.

Bin Code List for Reference

Luminous Intensity		Unit : mcd@20mA	
Bin Code	Min	Max	
B33	202	252	
B34	252	316	
B35	316	394	
B36	394	493	
B37	493	620	

Tolerance of Luminous Intensity on each bin is $\pm 11\%$.

Dominant Wavelength		Unit : nm@20mA	
Bin Code	Min	Max	
84	586	588	
85	588	590	
86	590	592	
87	592	594	
88	594	596	

Tolerance of Dominant Wavelength on each bin is $\pm 1\text{nm}$

Forward Voltage		Unit : V@20mA	
Bin Code	Min	Max	
V05	1.8	2.0	
V06	2.0	2.2	
V07	2.2	2.4	

.Tolerance of Forward Voltage on each bin is $\pm 0.1\text{V}$.