

# TOL-504UBEW


## Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-504UBEW	GaP	Blue	White diffused

### Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 5mm diameter package.
- Long life, stable and reliable.
- RoHS compliant.

### Dimensions

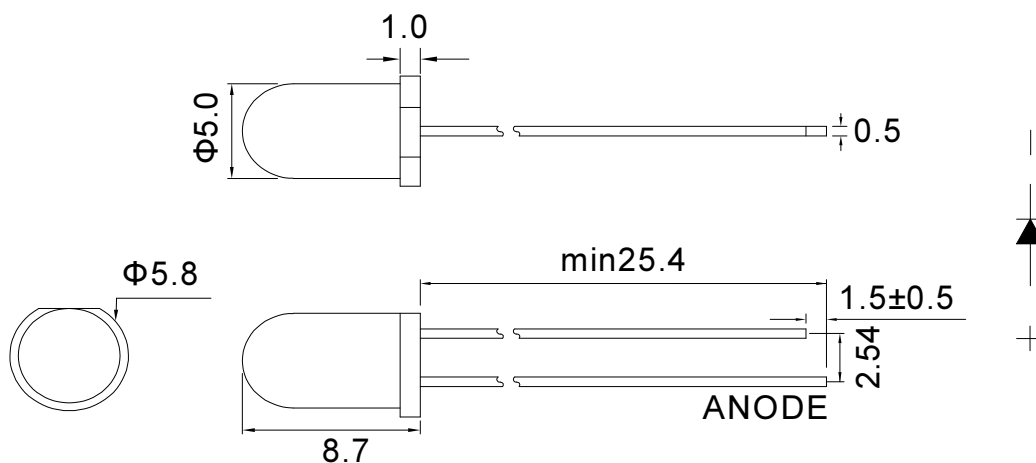

#### Notes:

1. All dimensions are in millimeter.
2. Tolerance is  $\pm 0.25$ mm unless otherwise notes.

## Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	150	mA
Power Dissipation	105	mW
Continuous Forward Current	20	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +80°C	
Storage Temperature Range	-40°C to +100°C	
Solder ability	235±5 °C for 3±0.5 sec	
Wave Soldering Profile For Lead-free Soldering	260°C±5 °C for 10 ±1 Sec	

## Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I <sub>v</sub>		493		mcd	I <sub>F</sub> =20mA
Viewing Angle	2θ <sub>1/2</sub>		40		deg	I <sub>F</sub> =20mA
Dominant Wavelength	λ <sub>d</sub>		470		nm	I <sub>F</sub> =20mA
Spectral Line Half-Width	Δλ		20		nm	I <sub>F</sub> =20mA
Forward Voltage	V <sub>F</sub>		3.2		V	I <sub>F</sub> =20mA
peak wavelength	λ <sub>p</sub>		465		nm	I <sub>F</sub> =20mA
Reverse Current	I <sub>R</sub>			10	μA	V <sub>R</sub> =5V

Home page : [www.oasistek.com.tw/en/index.php](http://www.oasistek.com.tw/en/index.php)

Contact us : [www.oasistek.com.tw/en/service.php](http://www.oasistek.com.tw/en/service.php)

Facebook : [www.facebook.com/pages/Oasistek-李洲科技/123207277743](https://www.facebook.com/pages/Oasistek-李洲科技/123207277743)