

TOL-50aURsCEa


Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-50aURsCEa	AlGaInP	Ultra Red	Water Clear

Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 5.0mm diameter package.
- Long life, stable and reliable.
- RoHS compliant.

Dimensions

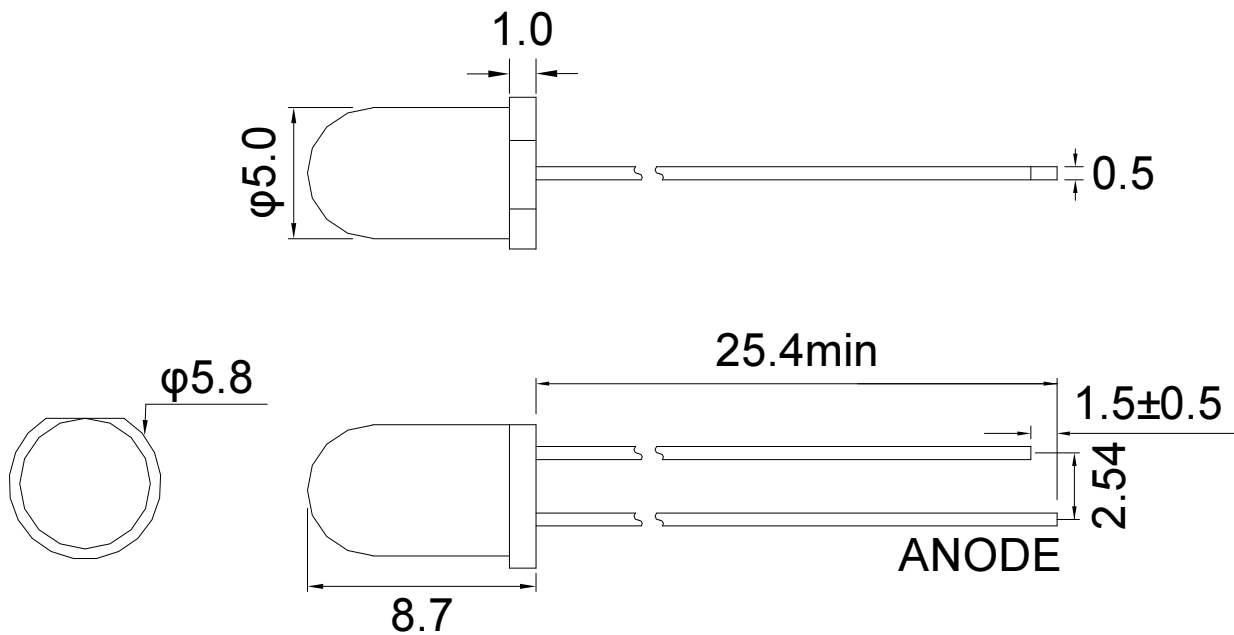

Notes:

1. All dimensions are in millimeter.
2. Tolerance is ± 0.25 mm unless otherwise noted.

Absolute Maximum Rating @ $T_a=25^\circ\text{C}$

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Power Dissipation	90	mW
Continuous Forward Current	20	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +85°C	
Storage Temperature Range	-40°C to +105°C	
Wave Soldering Profile For Lead Free Soldering	260°C, 5 Seconds	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	6000	12000		mcd	I _F =20mA
Viewing Angle	2θ _{1/2}		15		deg	I _F =20mA
Dominant Wavelength	λ _d	625	628	635	nm	I _F =20mA
Spectral Line Half-Width	Δλ		15		nm	I _F =20mA
Forward Voltage	V _F		2.25	2.6	V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V

* Please refer to CIE 1931 chromaticity diagram.

www.oasistek.com.tw

Contact us : service@oasistek.com.tw

Catalogue : <http://goo.gl/6rcsV6>