


REMARK

RoHS Compliant



- 1.Glass Thk: 0.7mm
- 2.Film Type: Non-Glare
- 3.Total Thk: 0.95±0.15mm
- 4.Linearity: ±1.8% or less
- 5.Transmittance: 80% or more
- 6.Resistance
100 < Y < 1200 ohm
100 < X < 1200 ohm
- 7.Connector: FPC
- 8.General Tolerance: ±0.5

CIRCUIT DIAGRAM

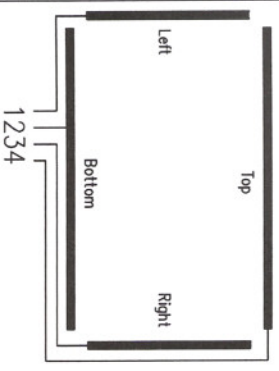


SIGNAL ASSIGNMENT


Pin No	Signal
1	Left
2	Bottom
3	Right
4	Top

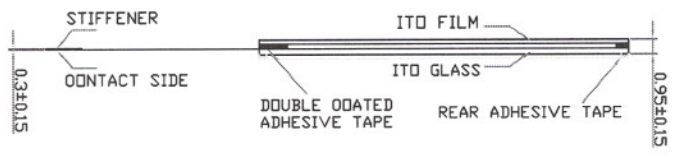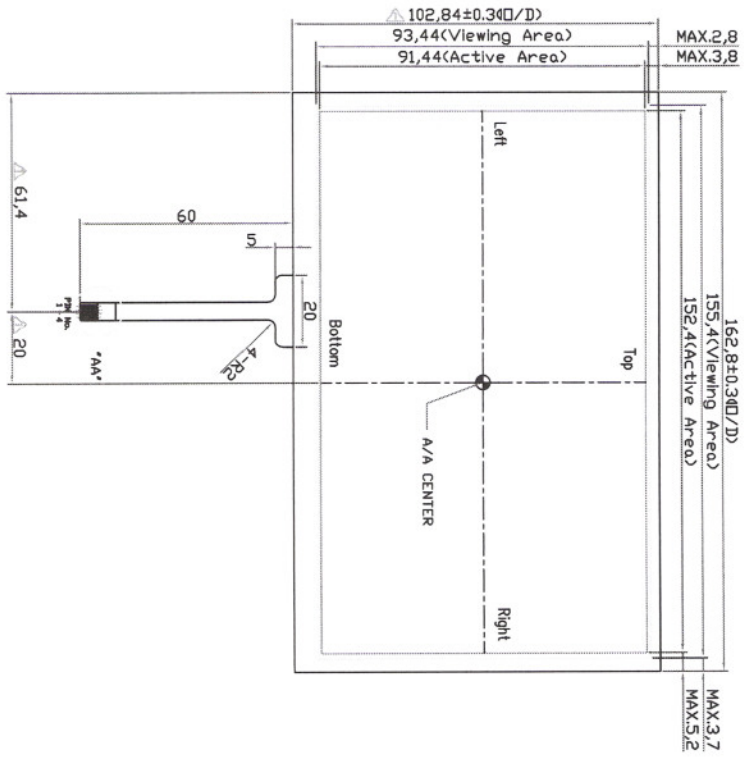

Detail "AA"

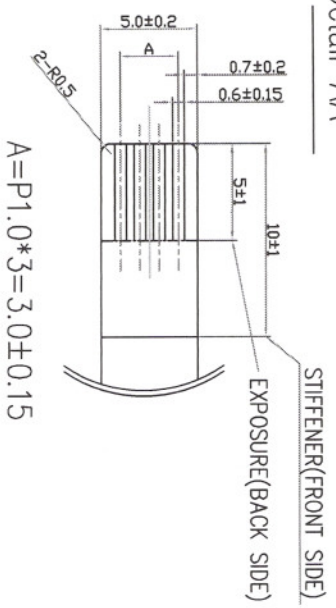

$A=P1.0*3=3.0\pm0.15$

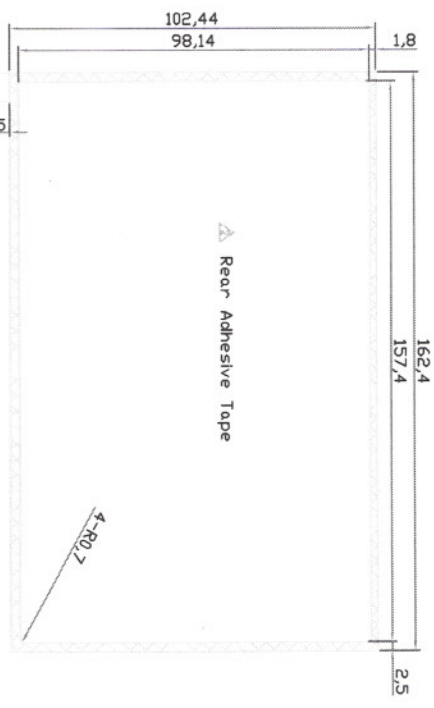

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

REV.	REVISION	DATE	DRAWN	CHECKED	APPROVED	DRAW	STD.TOL	UNIT	mm	DRAWING NO.	REV.
2	ADD a Rear DAT	06.10.18	H.Y.I.M	K.B.K.M	S.K.M					TP090W-1	2
1	FPC Location, Dimension Change	06.08.30	H.Y.I.M	K.B.K.M	S.K.M						
0	NEW DRAW	06.08.10	H.Y.I.M	K.B.K.M	S.K.M						

Web-Site @
www.hantouchusa.com