


Common Mode Choke TP1001

| Electrical Specifications @ 25°C | | | | | | | | | | | | |
|----------------------------------|--------------|---------------------------------|-----------------------|------------|-------------|-------------|-------------|--------------|--------------|--------------|------------|-------------|
| Part Number | No. of Ports | Primary Inductance OCL (μH MIN) | Common Mode Rejection | | | | | | | | | DCR (Ω MAX) |
| | | | 100 KHz (dB) | 1 MHz (dB) | 10 MHz (dB) | 30 MHz (dB) | 50 MHz (dB) | 100 MHz (dB) | 300 MHz (dB) | 500 MHz (dB) | 1 GHz (dB) | |
| TP1001 | 4 | 47 | 3 | 19 | 32 | 36 | 35 | 29 | 12 | 6 | - | 0.40 |

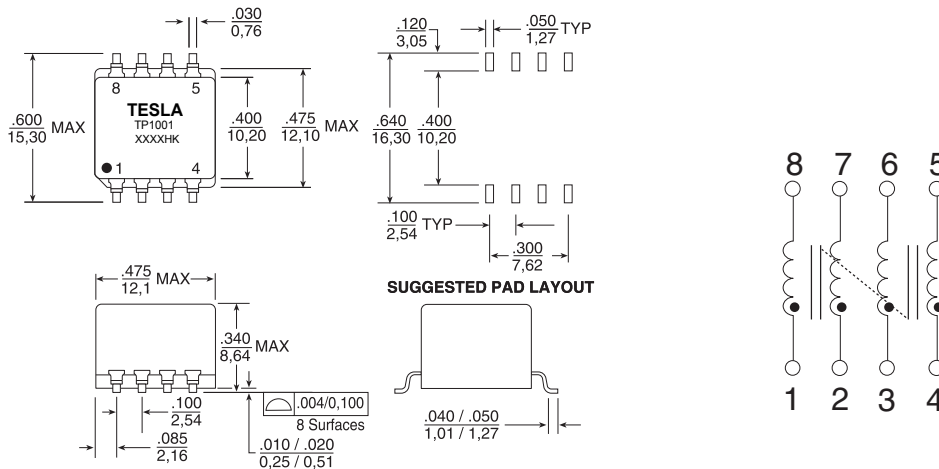

Weight2.0 grams
 Tape & Reel250/reel
 Tube40/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
 all tolerances are $\pm \frac{.010}{0,25}$