

# Topstek Current Transducers TP25A .. TP300A


## TP 25A~300A

### Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight. Three sensors in one package
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (33 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

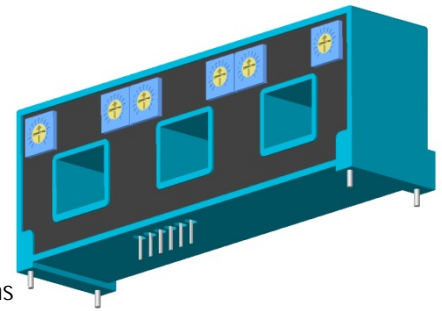




### Specifications

Parameter	Symbol	Unit	TP 25A	TP 37.5A	TP 50A	TP 75A	TP 100A	TP 125A	TP 150A	TP 175A	TP 200A	TP 250A	TP 300A
Nominal Input Current	$I_{fn}$	A DC	25	37.5	50	75	100	125	150	175	200	250	300
Saturation Current	$I_{fs}$	A DC	±75	±112.5	±150	±225	±300	±375	±450	±525	±600	±600	±600
Linear Range	$I_{fs}$	A DC	±75	±112.5	±150	±225	±300	±375	±450	±450	±450	±450	±450
Nominal Output Voltage	$V_{hn}$	V	4 V±1% @ $I_f=I_{fn}$ ( $R_L=10k\Omega$ )										
Offset Voltage	$V_{os}$	mV	Within ±35 mV @ $I_f=0$ , $T_a=25^\circ\text{C}$										
Output Resistance	$R_{OUT}$	$\Omega$	<100 $\Omega$ (50 $\Omega$ nominal)										
Hysteresis Error	$V_{oh}$	mV	Within ±25 mV @ $I_f=I_{fn}\rightarrow 0$										
Supply Voltage	$V_{CC}/V_{EE}$	V	±15V ±5%										
Linearity	$\rho$	%	Within ±1% of $I_{fn}$										
Consumption Current	$I_{CC}$	mA	±33 mA nominal, ±45 mA max										
Response Time (90% $V_{hn}$ )	$T_r$	$\mu\text{sec}$	10 $\mu\text{sec}$ max. @ $dI_f/dt = I_{fn}/\mu\text{sec}$										
Response Performance	-	%	5% Overshoot max.										
Frequency bandwidth (-3dB)	$f_{BW}$	Hz	DC to 50kHz										
Thermal Drift of Output	-	%/ $^\circ\text{C}$	Within ±0.1 %/ $^\circ\text{C}$ @ $I_{fn}$										
Thermal Drift of Zero Current Offset	-	mV/ $^\circ\text{C}$	< ±3	<±2	< ±1.5	< ±1 mV/ $^\circ\text{C}$							
Dielectric Strength	-	V	AC2.5KV X 60 sec										
Isolation Resistance @ 1000 VDC	$R_{IS}$	M $\Omega$	>1000 M $\Omega$										
Operating Temperature	$T_a$	$^\circ\text{C}$	-15 $^\circ\text{C}$ to 80 $^\circ\text{C}$										
Storage Temperature	$T_s$	$^\circ\text{C}$	-20 $^\circ\text{C}$ to 85 $^\circ\text{C}$										
Mass	W	g	90 g										


# Topstek Current Transducers TP25A .. TP300A

## Appearance, dimensions and pin identification

All dimensions in mm  $\pm 0.5$ , holes  $-0, +0.2$  except otherwise noted.

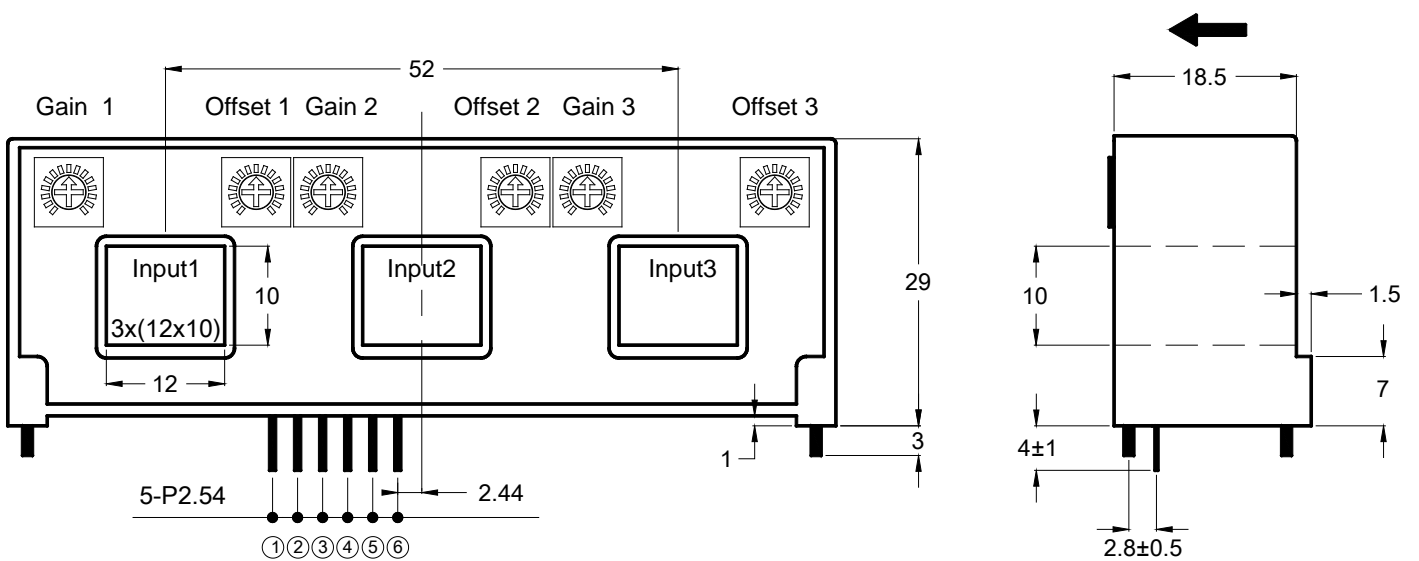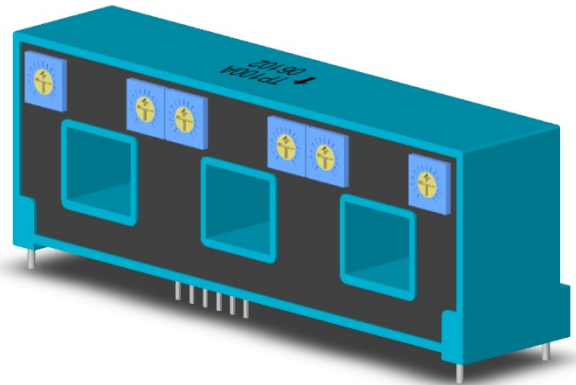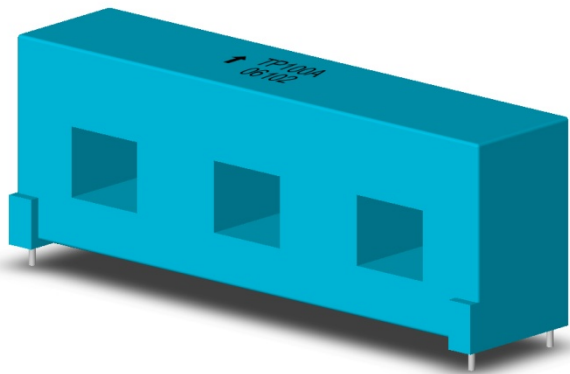

← Positive current flow direction

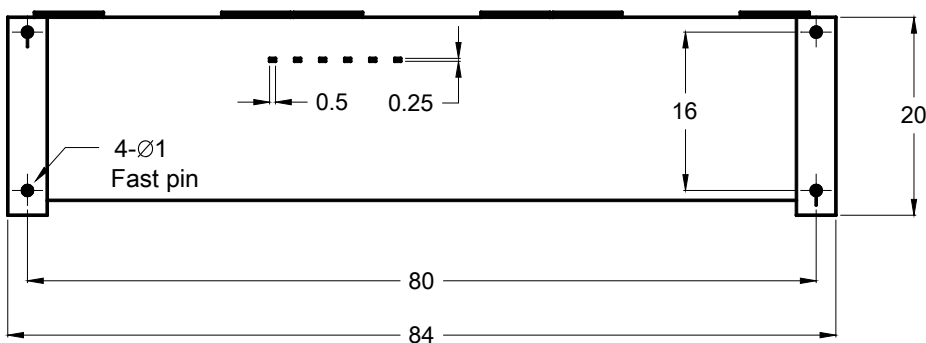

Pin Assignment	
①	+15V
②	-15V
③	GND
④	Output1
⑤	Output2
⑥	Output3