

REMARK


RoHS Compliant

- 1.Glass Thk: 1.1mm
- 2.Film Type: Non-Glare
- 3.Total Thk: 1.35±0.15mm
- 4.Linearity: ±1.8% or less
- 5.Transmittance: 80% or more
- 6.Resistance  
200 < Y < 750 ohm  
350 < X < 900 ohm
- 7.Connector: FPC
- 8.General Tolerance: ±0.5




CIRCUIT DIAGRAM

SIGNAL ASSIGNMENT

Pin No	Signal
1	Left
2	Top
3	Right
4	Bottom

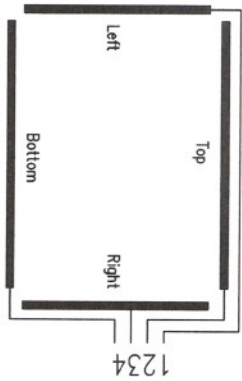

Detail "AA"

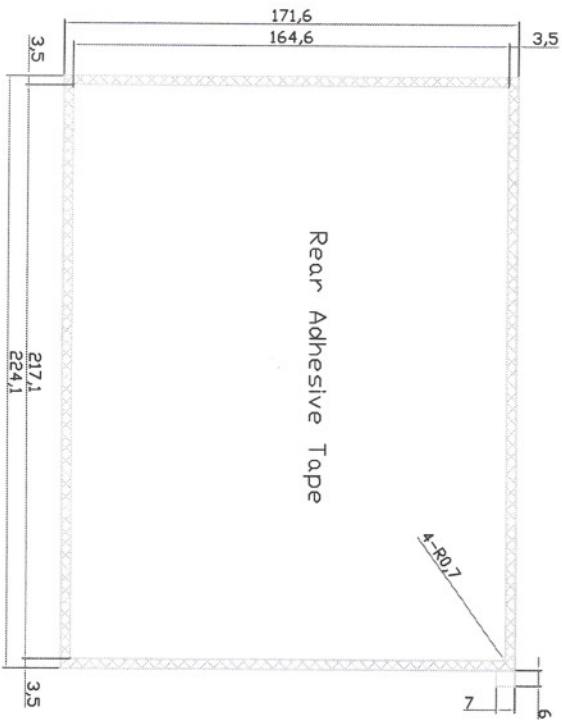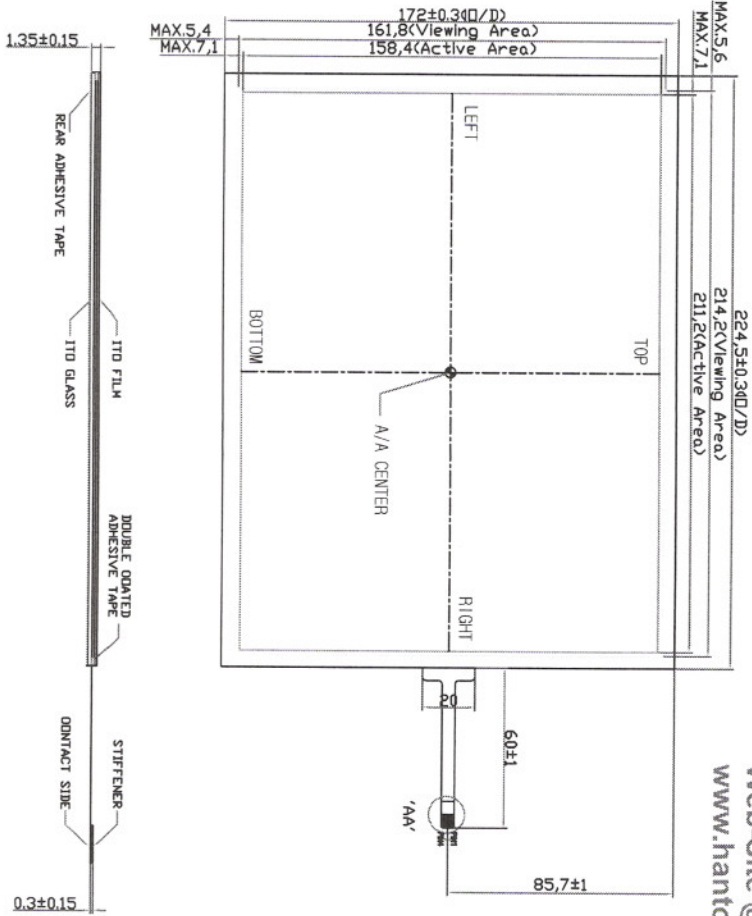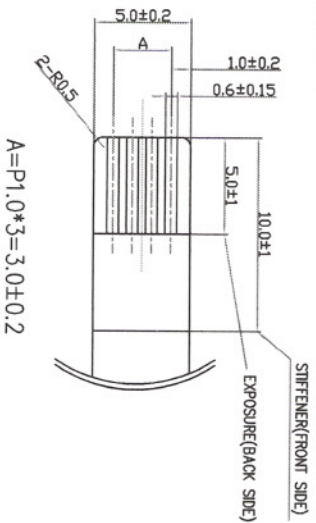

REV.No	REVISION	DATE	DRAWN	CHECKED	APPROVED
1	△ Add a Rear DAT	07.01.11	H.Y.I.M	K.B.KIM	Y.J.OH
0	NEW DRAW	02.01.12	W.J.KIM		
	REVISED				

APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
CHECK		SCALE	NONE		1
DESIGN					
DRAW					
DESCRIPTION				10.4" TOUCH PANEL	SHEET
				1/1	