

## Features

- Supply Voltage: 4.5 V to 36 V
- Offset Voltage: ±75 μV Maximum
- Differential Input Voltage Range to Supply Rail, can Work as Comparator
- Rail-to-Rail Input and Output
- Bandwidth: 3 MHz
- Slew Rate: 4 V/μs
- Low Noise: 21 nV/√Hz at 1 kHz
- High Capacitive Load Drive Capability: 10 nF
- Operation Temperature Range: -40°C to 125°C


## Applications

- Instrumentation
- Active Filters, ASIC Input, or Output Amplifier
- Sensor Interface
- Motor Control
- Industrial Control

## Description

The TPA173x family is the newest high supply voltage amplifiers with low offset, low power, and stable high-frequency response. These devices incorporate the proprietary and patented design techniques of the 3PEAK to achieve very good AC performance with 3-MHz bandwidth, 4-V/μs slew rate, and low distortion while drawing only 710 μA of quiescent current per amplifier. The input common-mode voltage range extends to V- and V+, and the outputs swing rail-to-rail. The TPA173x family can be used as plug-in replacements for many commercially available op-amps to reduce power and improve the range and performance of the input and output.

## Typical Application Circuit

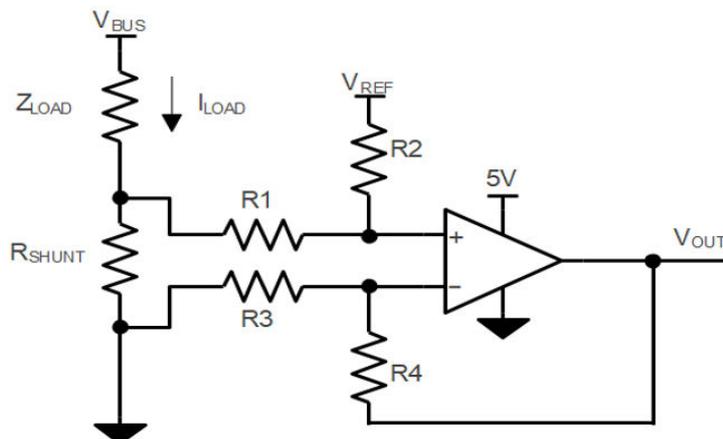

$$V_{OUT} = (I_{LOAD} \times R_{SHUNT}) \times (R2 / R1) + V_{REF}$$

$$\text{When } R3 = R1, R2 = R4, R_{SHUNT} \ll R1$$

## Table of Contents

<b>Features</b> .....	<b>1</b>
<b>Applications</b> .....	<b>1</b>
<b>Description</b> .....	<b>1</b>
<b>Typical Application Circuit</b> .....	<b>1</b>
<b>Revision History</b> .....	<b>3</b>
<b>Pin Configuration and Functions</b> .....	<b>4</b>
<b>Specifications</b> .....	<b>7</b>
Absolute Maximum Ratings <sup>(1)</sup> .....	7
ESD, Electrostatic Discharge Protection.....	7
Recommended Operating Conditions.....	7
Thermal Information.....	7
Electrical Characteristics.....	9
Typical Performance Characteristics.....	15
<b>Detailed Description</b> .....	<b>18</b>
Overview.....	18
Functional Block Diagram.....	18
<b>Tape and Reel Information</b> .....	<b>19</b>
<b>Package Outline Dimensions</b> .....	<b>20</b>
SOT23-5.....	20
SOP8.....	21
MSOP8.....	22
SOP14.....	23
TSSOP14.....	24
<b>Order Information</b> .....	<b>25</b>
<b>IMPORTANT NOTICE AND DISCLAIMER</b> .....	<b>26</b>

## Revision History


Date	Revision	Notes
2025-06-11	Rev.A.0	Released version.

## Pin Configuration and Functions





**Table 1. Pin Functions TPA1731:**

Pin		Name	I/O	Description
SOT23-5	SOP8			
1	6	Out	Output	Output
2	4	-Vs		Negative power supply
3	3	+In	Input	Non-inverting input
4	2	-In	Input	Inverting input
5	7	+Vs		Positive power supply
-	1, 5, 8	NC		Not connected

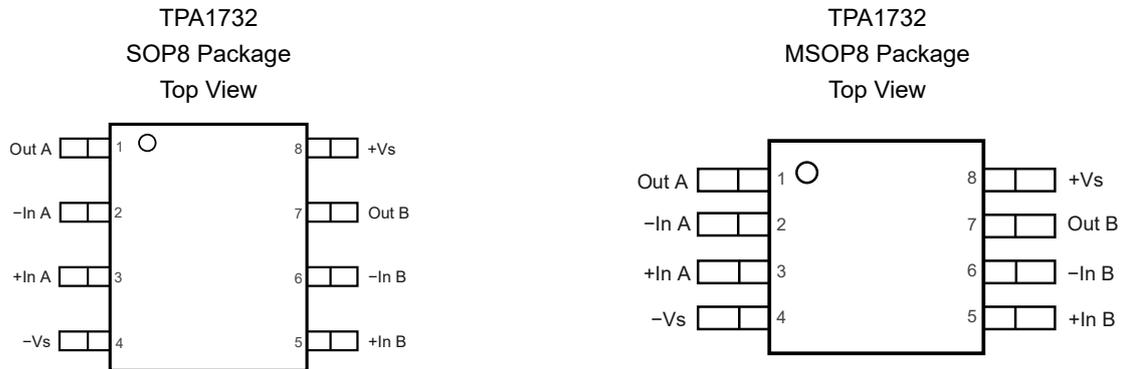
**Table 2. Pin Functions: TPA1732**

Pin		Name	I/O	Description
SOP8	MSOP8			
1	1	Out A	Output	Output
2	2	-In A	Input	Inverting input
3	3	+In A	Input	Non-inverting input
4	4	-Vs		Negative power supply
5	5	+In B	Input	Non-inverting input
6	6	-In B	Input	Inverting input
7	7	Out B	Output	Output
8	8	+Vs		Positive power supply

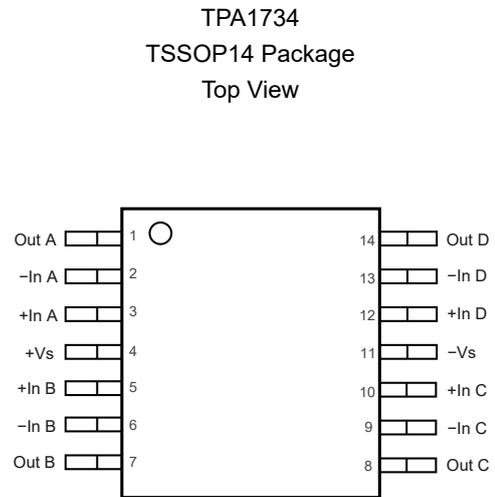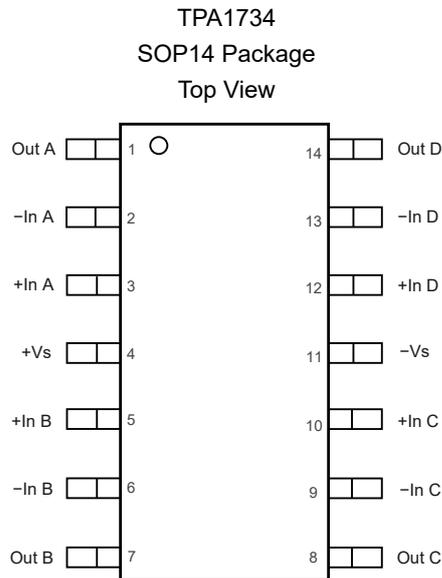

**Table 3. Pin Functions: TPA1734**

Pin		Name	I/O	Description
SOP14	TSSOP14			
1	1	Out A	Output	Output
2	2	-In A	Input	Inverting input
3	3	+In A	Input	Non-inverting input
4	4	+Vs		Positive power supply
5	5	+In B	Input	Non-inverting input
6	6	-In B	Input	Inverting input
7	7	Out B	Output	Output
8	8	Out C	Output	Output
9	9	-In C	Input	Inverting input
10	10	+In C	Input	Non-inverting input
11	11	-Vs		Negative power supply
12	12	+In D	Input	Non-inverting input
13	13	-In D	Input	Inverting input
14	14	Out D	Output	Output

## Specifications

### Absolute Maximum Ratings <sup>(1)</sup>

Parameter		Min	Max	Unit
	Supply Voltage, (+V <sub>S</sub> ) – (–V <sub>S</sub> )		40	V
	Input Voltage	(–V <sub>S</sub> ) – 0.3	(+V <sub>S</sub> ) + 0.3	V
	Differential Input Voltage	(–V <sub>S</sub> ) – (+V <sub>S</sub> )	(+V <sub>S</sub> ) – (–V <sub>S</sub> )	V
	Input Current: +IN, –IN <sup>(2)</sup>	–10	10	mA
	Output Short-Circuit Duration <sup>(3)</sup>		Infinite	
T <sub>J</sub>	Maximum Junction Temperature		150	°C
T <sub>A</sub>	Operating Temperature Range	–40	125	°C
T <sub>STG</sub>	Storage Temperature Range	–65	150	°C
T <sub>L</sub>	Lead Temperature (Soldering, 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The inputs and outputs are protected by ESD protection diodes to the power supply. If the input or output extends more than 500 mV beyond the positive or negative power supply, the current should be limited to less than 10 mA.

(3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many comparators are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

### ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	2	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	1	kV

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### Recommended Operating Conditions

Parameter		Min	Typ	Max	Unit
V <sub>S</sub>	Supply Voltage, (+V <sub>S</sub> ) – (–V <sub>S</sub> )	4.5		36	V
T <sub>A</sub>	Operating Temperature Range	–40		125	°C

### Thermal Information

Package Type	$\theta_{JA}$	$\theta_{JC}$	Unit
SOT23-5	250	81	°C/W
SOP8	158	43	°C/W

Package Type	$\theta_{JA}$	$\theta_{JC}$	Unit
MSOP8	210	45	$^{\circ}\text{C/W}$
SOP14	120	36	$^{\circ}\text{C/W}$
TSSOP14	180	35	$^{\circ}\text{C/W}$

## Electrical Characteristics

All test conditions:  $V_S = 36\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $R_L = 10\text{ k}\Omega$ , unless otherwise noted.

Symbol	Parameter	Conditions	TA	Min	Typ	Max	Unit
<b>Power Supply</b>							
$V_S$	Supply Voltage Range			4.5		36	V
$I_Q$	Quiescent Current per Amplifier	$V_S = 36\text{ V}$		0.6	0.71	0.83	mA
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	0.55		0.92	mA
PSRR	Power Supply Rejection Ratio	$V_S = 8\text{ V}$ to $36\text{ V}$ $V_{CM} = 0.5 V_S$		127	145		dB
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	125	145		dB
<b>Input Characteristics</b>							
$V_{OS}$	Input Offset Voltage Drift	$V_S = 36\text{ V}$ , $V_{CM} = 18\text{ V}$		-75	5	75	$\mu\text{V}$
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	-250	10	250	$\mu\text{V}$
		$V_S = 36\text{ V}$ , $V_{CM} = 34.5\text{ V}$		-125	10	125	$\mu\text{V}$
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	-350	50	350	$\mu\text{V}$
$V_{OS\text{ TC}}$	Input Offset Voltage				0.5		$\mu\text{V}/^\circ\text{C}$
$I_B$	Input Bias Current			-200	20	200	pA
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	-20000		20000	pA
$I_{OS}$	Input Offset Current			-200	20	200	pA
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	-3000		3000	pA
CID	Input Capacitor	Differential mode			7.8		pF
CIC	Input Capacitor	Common mode			6.9		pF
$A_V$	Open-Loop Voltage Gain	$(V_-) + 0.6\text{ V} < V_O < (V_+) - 0.6\text{ V}$ , $R_{LOAD} = 2\text{ k}\Omega$		128.5	132		dB
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	104			dB
		$(V_-) + 0.3\text{ V} < V_O < (V_+) - 0.3\text{ V}$ , $R_{LOAD} = 10\text{ k}\Omega$		133	135		dB
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	107			dB
$V_{CMR}$	Common-Mode Input Voltage Range			-0.1		36.1	V
CMRR	Common-Mode Rejection Ratio	$(V_-) - 0.1\text{ V} < V_{CM} < (V_+) - 3\text{ V}$		117	138		dB
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	115			dB
		$(V_+) - 1.5\text{ V} < V_{CM} < (V_+) - 0.1\text{ V}$		102	122		dB
			$-40^\circ\text{C}$ to $125^\circ\text{C}$	98			dB
<b>Output Characteristics</b>							
$V_{OH}$	Output Swing from Positive Rail	$R_{LOAD} = 10\text{ k}\Omega$ to $V_S / 2$				60	mV
			$-40^\circ\text{C}$ to $125^\circ\text{C}$			80	mV
		$R_{LOAD} = 2\text{ k}\Omega$ to $V_S / 2$				300	mV
			$-40^\circ\text{C}$ to $125^\circ\text{C}$			350	mV
		No Load				8	mV

Symbol	Parameter	Conditions	TA	Min	Typ	Max	Unit
			-40°C to 125°C			10	mV
V <sub>OL</sub>	Output Swing from Negative Rail	R <sub>LOAD</sub> = 10 k $\Omega$ to V <sub>S</sub> / 2				60	mV
			-40°C to 125°C			80	mV
		R <sub>LOAD</sub> = 2 k $\Omega$ to V <sub>S</sub> / 2				300	mV
			-40°C to 125°C			350	mV
		No Load				8	mV
			-40°C to 125°C			10	mV
I <sub>SC</sub>	Output Short-Circuit Current	Source Current			62		mA
		Sink Current			72		mA
<b>AC Specifications</b>							
GBW	Gain-Bandwidth Product				3		MHz
SR	Slew Rate	G = 1, 10 V step			4		V/ $\mu$ s
t <sub>OR</sub>	Overload Recovery				2		$\mu$ s
t <sub>s</sub>	Settling Time, 0.01%	G = 1, 10 V step			5.1		$\mu$ s
	Settling Time, 0.001%				2.2		$\mu$ s
Z <sub>O</sub>	Open-loop Output Impedance	f = 1 MHz, I <sub>O</sub> = 0 A			135		$\Omega$
C <sub>LOAD</sub>	Capacitive Load Drive					10	nF
<b>Noise Performance</b>							
E <sub>N</sub>	Input Voltage Noise	(V-) - 0.1 V < V <sub>CM</sub> < (V+) - 3V, f = 0.1 Hz to 10 Hz			9.4		$\mu$ V <sub>PP</sub>
		(V+) - 1.5 V < V <sub>CM</sub> < (V+) - 0.1V, f = 0.1 Hz to 10 Hz			14.4		$\mu$ V <sub>PP</sub>
e <sub>N</sub>	Input Voltage Noise Density	(V-) - 0.1 V < V <sub>CM</sub> < (V+) - 3V, f = 100 Hz			51		nV/ $\sqrt{\text{Hz}}$
		(V-) - 0.1 V < V <sub>CM</sub> < (V+) - 3V, f = 1 kHz			21		nV/ $\sqrt{\text{Hz}}$
		(V+) - 1.5 V < V <sub>CM</sub> < (V+) - 0.1V, f = 100 Hz			125		nV/ $\sqrt{\text{Hz}}$
		(V+) - 1.5 V < V <sub>CM</sub> < (V+) - 0.1V, f = 1 kHz			47		nV/ $\sqrt{\text{Hz}}$
i <sub>N</sub>	Input Current Noise	f = 1 kHz			1.5		fA/ $\sqrt{\text{Hz}}$
THD+N	Total Harmonic Distortion and Noise	f = 1 kHz, G = 1, R <sub>L</sub> = 10 k $\Omega$ , V <sub>OUT</sub> = 3.5 V <sub>RMS</sub>			0.00042		%

**36-V, 3-MHz, 4-V/ $\mu$ s, Precision Operational Amplifier**

 All test conditions:  $V_S = 8\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $R_L = 10\text{ k}\Omega$ , unless otherwise noted.

Symbol	Parameter	Conditions	TA	Min	Typ	Max	Unit
<b>Input Characteristics</b>							
$V_{OS}$	Input Offset Voltage Drift	$V_S = 8\text{ V}$ , $V_{CM} = 4\text{ V}$		-75	5	75	$\mu\text{V}$
			-40°C to 125°C	-250	10	250	$\mu\text{V}$
		$V_S = 8\text{ V}$ , $V_{CM} = 6.5\text{ V}$		-125	10	125	$\mu\text{V}$
			-40°C to 125°C	-350	50	350	$\mu\text{V}$
$V_{OS\text{ TC}}$	Input Offset Voltage			0.5		$\mu\text{V}/^\circ\text{C}$	
$I_B$	Input Bias Current			-200	20	200	pA
			-40°C to 125°C	-20000		20000	pA
$I_{OS}$	Input Offset Current			-200	20	200	pA
			-40°C to 125°C	-3000		3000	pA
CID	Input Capacitor	Differential mode			7.8		pF
CIC	Input Capacitor	Common mode			6.9		pF
$A_V$	Open-Loop Voltage Gain	$(V^-) + 0.6\text{ V} < V_O < (V^+) - 0.6\text{ V}$ , $R_{LOAD} = 2\text{ k}\Omega$		124	136		dB
			-40°C to 125°C	114			dB
		$(V^-) + 0.3\text{ V} < V_O < (V^+) - 0.3\text{ V}$ , $R_{LOAD} = 10\text{ k}\Omega$		126	140		dB
			-40°C to 125°C	122			dB
$V_{CMR}$	Common-Mode Input Voltage Range			-0.1		8.1	V
CMRR	Common-Mode Rejection Ratio	$(V^-) - 0.1\text{ V} < V_{CM} < (V^+) - 3\text{ V}$		104	122		dB
			-40°C to 125°C	101			dB
		$(V^+) - 1.5\text{ V} < V_{CM} < (V^+) - 0.1\text{ V}$		101	114		dB
			-40°C to 125°C	195			dB
<b>Output Characteristics</b>							
$V_{OH}$	Output Swing from Positive Rail	$R_{LOAD} = 10\text{ k}\Omega$ to $V_S / 2$				20	mV
			-40°C to 125°C				25
		$R_{LOAD} = 2\text{ k}\Omega$ to $V_S / 2$				60	mV
			-40°C to 125°C				80
		No Load				10	mV
			-40°C to 125°C				12
$V_{OL}$	Output Swing from Negative Rail	$R_{LOAD} = 10\text{ k}\Omega$ to $V_S / 2$				20	mV
			-40°C to 125°C				25
		$R_{LOAD} = 2\text{ k}\Omega$ to $V_S / 2$				60	mV
			-40°C to 125°C				80
		No Load				10	mV
			-40°C to 125°C				12

Symbol	Parameter	Conditions	TA	Min	Typ	Max	Unit
I <sub>sc</sub>	Output Short-Circuit Current	Source Current			62		mA
		Sink Current			72		mA
<b>AC Specifications</b>							
GBW	Gain-Bandwidth Product				3		MHz
SR	Slew Rate	G = 1, 10 V step			4		V/ $\mu$ s
t <sub>OR</sub>	Overload Recovery				2		$\mu$ s
Z <sub>O</sub>	Open-loop Output Impedance	f = 1 MHz, I <sub>O</sub> = 0 A			220		$\Omega$
C <sub>LOAD</sub>	Capacitive Load Drive				10		nF
<b>Noise Performance</b>							
E <sub>N</sub>	Input Voltage Noise	(V-) - 0.1 V < V <sub>CM</sub> < (V+) - 3V, f = 0.1 Hz to 10 Hz			9.4		$\mu$ V <sub>PP</sub>
		(V+) - 1.5 V < V <sub>CM</sub> < (V+) - 0.1V, f = 0.1 Hz to 10 Hz			14.4		$\mu$ V <sub>PP</sub>
e <sub>N</sub>	Input Voltage Noise Density	(V-) - 0.1 V < V <sub>CM</sub> < (V+) - 3V, f = 100 Hz			51		nV/ $\sqrt{\text{Hz}}$
		(V-) - 0.1 V < V <sub>CM</sub> < (V+) - 3V, f = 1 kHz			21		nV/ $\sqrt{\text{Hz}}$
		(V+) - 1.5 V < V <sub>CM</sub> < (V+) - 0.1V, f = 100 Hz			125		nV/ $\sqrt{\text{Hz}}$
		(V+) - 1.5 V < V <sub>CM</sub> < (V+) - 0.1V, f = 1 kHz			47		nV/ $\sqrt{\text{Hz}}$
i <sub>N</sub>	Input Current Noise	f = 1 kHz			1.5		fA/ $\sqrt{\text{Hz}}$

**36-V, 3-MHz, 4-V/ $\mu$ s, Precision Operational Amplifier**


All test conditions:  $V_S = 4.5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $R_L = 10\text{ k}\Omega$ , unless otherwise noted.

Symbol	Parameter	Conditions	TA	Min	Typ	Max	Unit	
<b>Power Supply</b>								
$I_Q$	Quiescent Current per Amplifier	$V_S = 4.5\text{ V}$		0.56	0.64	0.75	mA	
			$-40^\circ\text{C to }125^\circ\text{C}$	0.51		0.82	mA	
<b>Input Characteristics</b>								
$V_{OS}$	Input Offset Voltage Drift	$V_S = 4.5\text{ V}, V_{CM} = 1.5\text{ V}$		-75	5	75	$\mu\text{V}$	
			$-40^\circ\text{C to }125^\circ\text{C}$	-250	10	250	$\mu\text{V}$	
		$V_S = 4.5\text{ V}, V_{CM} = 3\text{ V}$		-125	10	125	$\mu\text{V}$	
			$-40^\circ\text{C to }125^\circ\text{C}$	-350	50	350	$\mu\text{V}$	
$V_{OS\text{ TC}}$	Input Offset Voltage			0.5		$\mu\text{V}/^\circ\text{C}$		
$I_B$	Input Bias Current			-200	20	200	pA	
			$-40^\circ\text{C to }125^\circ\text{C}$	-20000		20000	pA	
$I_{OS}$	Input Offset Current			-200	20	200	pA	
			$-40^\circ\text{C to }125^\circ\text{C}$	-3000		3000	pA	
$C_{ID}$	Input Capacitor	Differential mode			7.8		pF	
$C_{IC}$	Input Capacitor	Common mode			6.9		pF	
$A_v$	Open-Loop Voltage Gain	$(V^-) + 0.6\text{ V} < V_O < (V^+) - 0.6\text{ V}, R_{LOAD} = 2\text{ k}\Omega$		116	136		dB	
			$-40^\circ\text{C to }125^\circ\text{C}$	114			dB	
		$(V^-) + 0.3\text{ V} < V_O < (V^+) - 0.3\text{ V}, R_{LOAD} = 10\text{ k}\Omega$		124	140		dB	
			$-40^\circ\text{C to }125^\circ\text{C}$	122			dB	
$V_{CMR}$	Common-Mode Input Voltage Range			-0.1		4.6	V	
$CMRR$	Common-Mode Rejection Ratio	$(V^-) - 0.1\text{ V} < V_{CM} < (V^+) - 3\text{ V}$		96	114		dB	
			$-40^\circ\text{C to }125^\circ\text{C}$	93			dB	
		$(V^+) - 1.5\text{ V} < V_{CM} < (V^+) - 0.1\text{ V}$		104	122		dB	
			$-40^\circ\text{C to }125^\circ\text{C}$	101			dB	
<b>Output Characteristics</b>								
$V_{OH}$	Output Swing from Positive Rail	$R_{LOAD} = 10\text{ k}\Omega \text{ to } V_S / 2$				20	mV	
			$-40^\circ\text{C to }125^\circ\text{C}$				25	mV
		$R_{LOAD} = 2\text{ k}\Omega \text{ to } V_S / 2$					60	mV
			$-40^\circ\text{C to }125^\circ\text{C}$				80	mV
		No Load					10	mV
			$-40^\circ\text{C to }125^\circ\text{C}$				12	mV
$V_{OL}$	Output Swing from Negative Rail	$R_{LOAD} = 10\text{ k}\Omega \text{ to } V_S / 2$				20	mV	
			$-40^\circ\text{C to }125^\circ\text{C}$				25	mV
		$R_{LOAD} = 2\text{ k}\Omega \text{ to } V_S / 2$					60	mV
			$-40^\circ\text{C to }125^\circ\text{C}$				80	mV


Symbol	Parameter	Conditions	TA	Min	Typ	Max	Unit
		No Load				10	mV
			-40°C to 125°C			12	mV
I <sub>sc</sub>	Output Short-Circuit Current	Source Current			62		mA
		Sink Current			72		mA
<b>AC Specifications</b>							
GBW	Gain-Bandwidth Product				3		MHz
SR	Slew Rate	G = 1, 10 V step			4		V/ $\mu$ s
t <sub>OR</sub>	Overload Recovery				2		ns
Z <sub>O</sub>	Open-loop Output Impedance	f = 1 MHz, I <sub>O</sub> = 0 A			220		$\Omega$
CLOAD	Capacitive Load Drive				10		nF
<b>Noise Performance</b>							
E <sub>N</sub>	Input Voltage Noise	(V-) - 0.1 V < V <sub>CM</sub> < (V+) - 3V, f = 0.1 Hz to 10 Hz			9.4		$\mu$ V <sub>PP</sub>
		(V+) - 1.5 V < V <sub>CM</sub> < (V+) - 0.1V, f = 0.1 Hz to 10 Hz			14.4		$\mu$ V <sub>PP</sub>
e <sub>N</sub>	Input Voltage Noise Density	(V-) - 0.1 V < V <sub>CM</sub> < (V+) - 3V, f = 100 Hz			51		nV/ $\sqrt{\text{Hz}}$
		(V-) - 0.1 V < V <sub>CM</sub> < (V+) - 3V, f = 1 kHz			21		nV/ $\sqrt{\text{Hz}}$
		(V+) - 1.5 V < V <sub>CM</sub> < (V+) - 0.1V, f = 100 Hz			125		nV/ $\sqrt{\text{Hz}}$
		(V+) - 1.5 V < V <sub>CM</sub> < (V+) - 0.1V, f = 1 kHz			47		nV/ $\sqrt{\text{Hz}}$
i <sub>N</sub>	Input Current Noise	f = 1 kHz			1.5		fA/ $\sqrt{\text{Hz}}$

**Typical Performance Characteristics**


All test conditions:  $V_S = \pm 15$  V,  $V_{CM} = 0$  V,  $R_L = 10$  k $\Omega$ , unless otherwise noted.

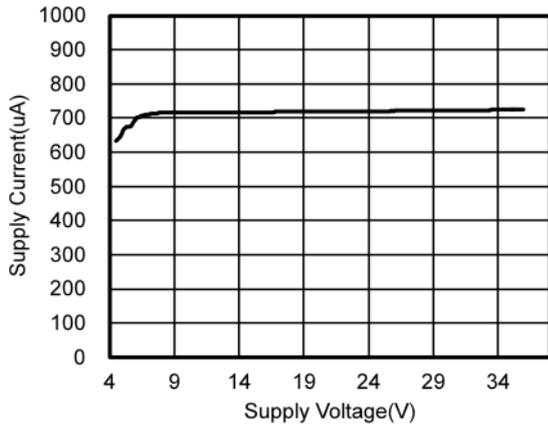


**Figure 1. Quiescent Current vs. Supply Voltage**

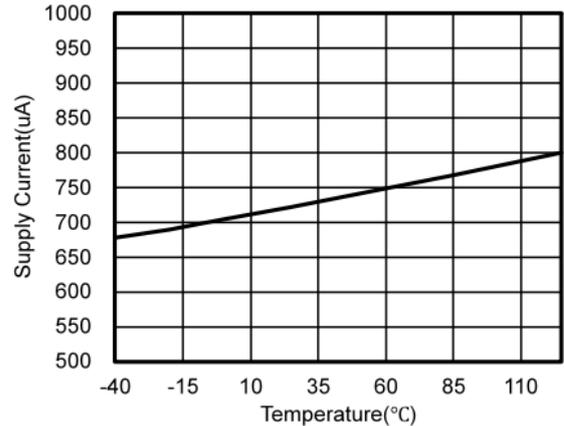


**Figure 2. Quiescent Current vs. Temperature**

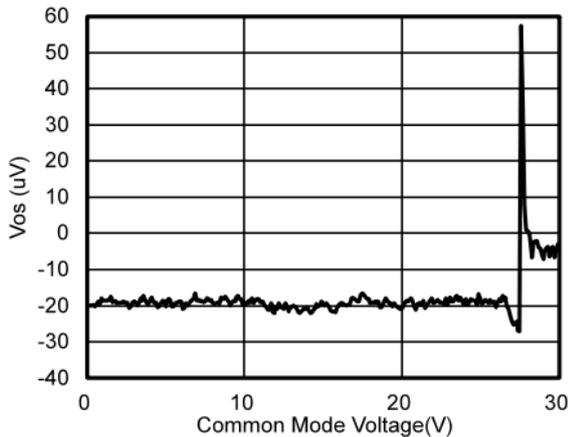


**Figure 3. Offset Voltage vs. Common-Mode Voltage**

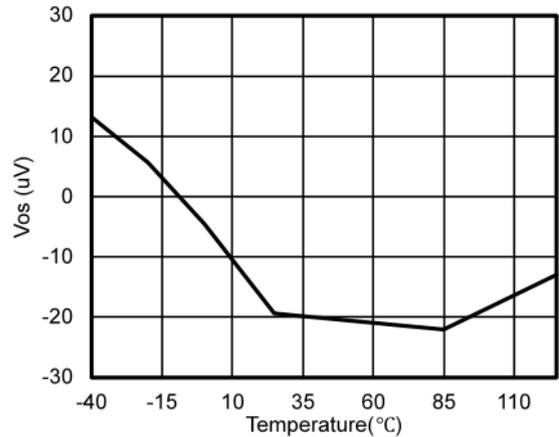

**Figure 4. Vos vs. Temperature**

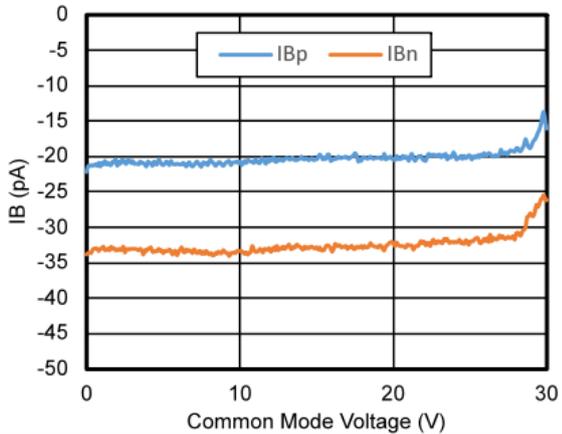

**Figure 5. IB vs. Common-Mode Voltage**

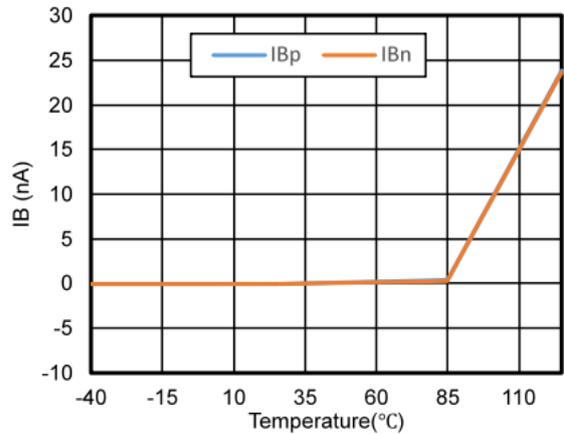

**Figure 6. IB vs. Temperature, -40 to 125°C**

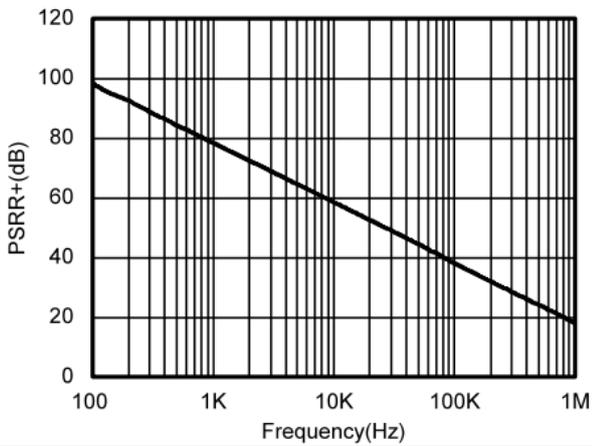


Figure 7. PSRR+ vs. Frequency

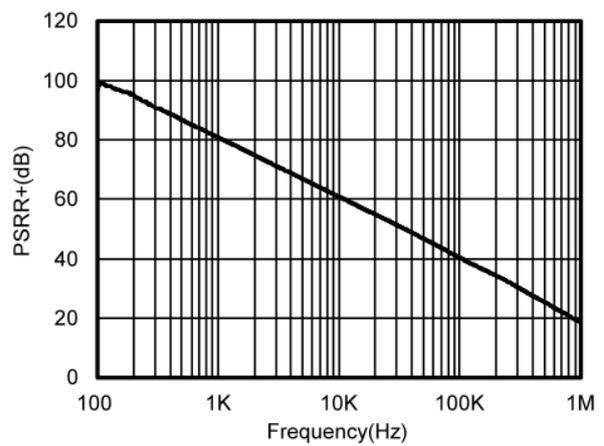


Figure 8. PSRR- vs. Frequency

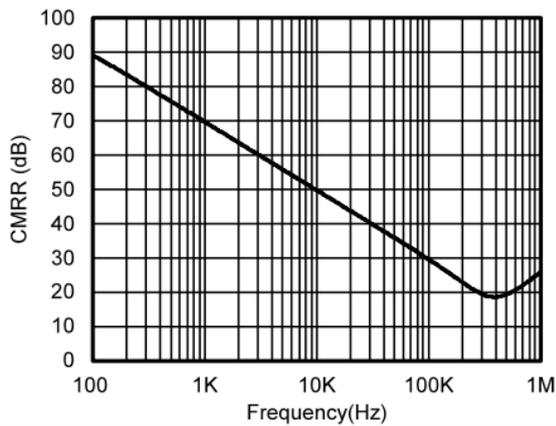


Figure 9. CMRR vs. Frequency

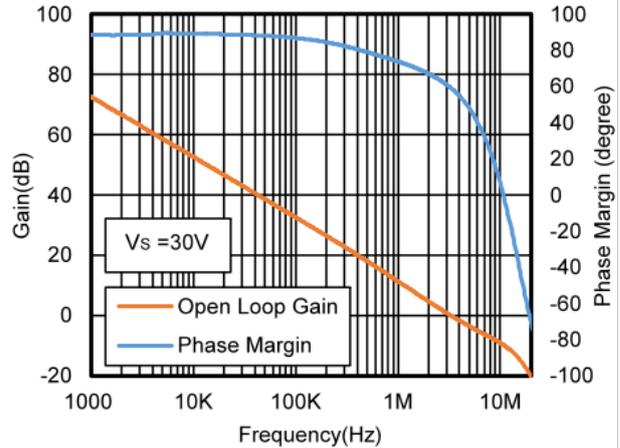


Figure 10. Open Loop Gain and Phase vs. Frequency  
 $R_{LOAD} = 10\text{ K}$ ,  $C_{LOAD} = 100\text{ pF}$

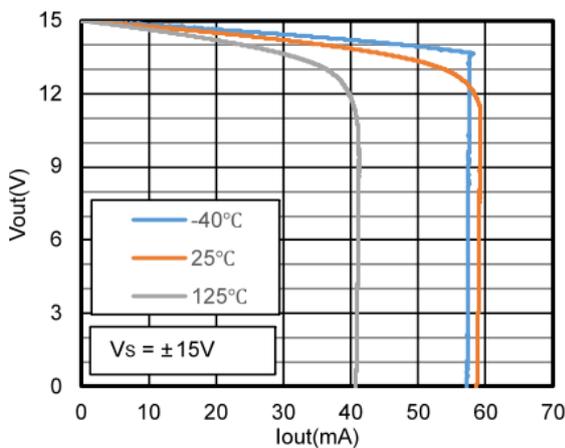


Figure 11. Output Voltage vs. Output Current, Source

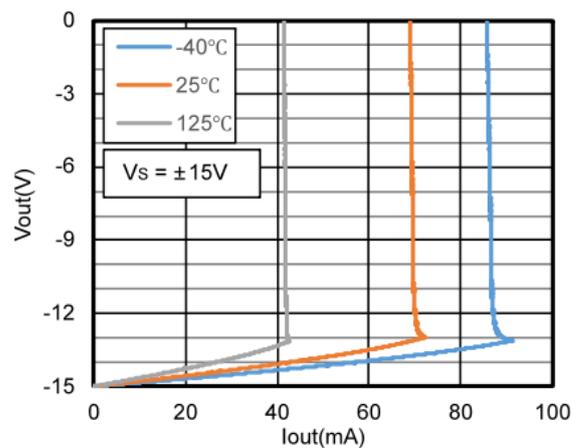


Figure 12. Output Voltage vs. Output Current, Sink

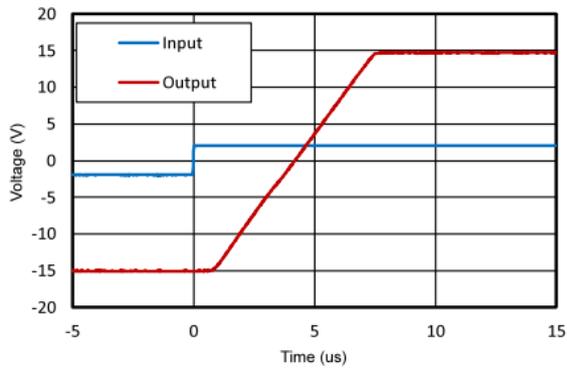


Figure 13. Positive Overload Recovery

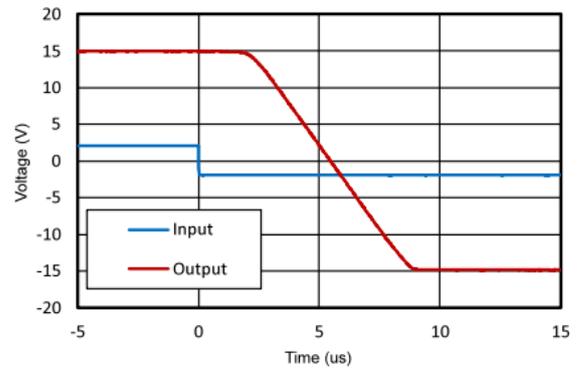


Figure 14. Negative Overload Recovery

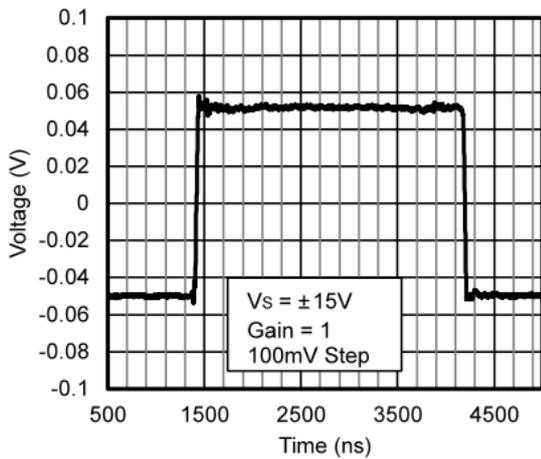


Figure 15. 100-mV Signal Step Response

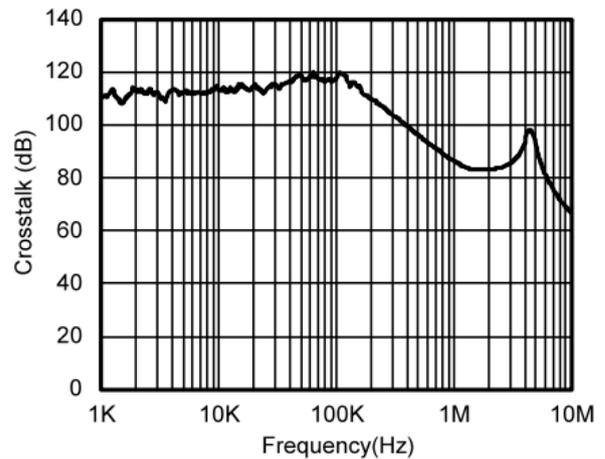


Figure 16. Crosstalk

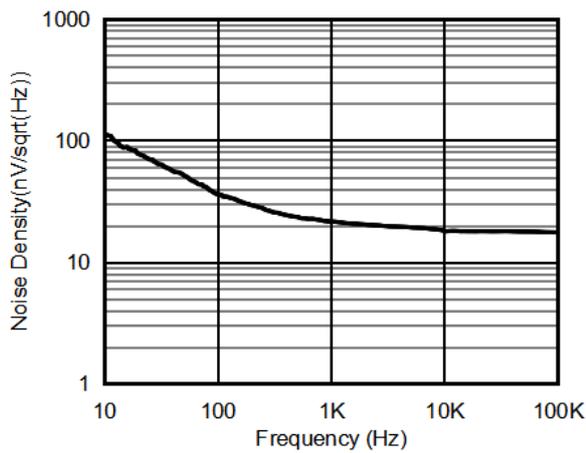


Figure 17. Voltage Noise Spectral Density vs. Frequency

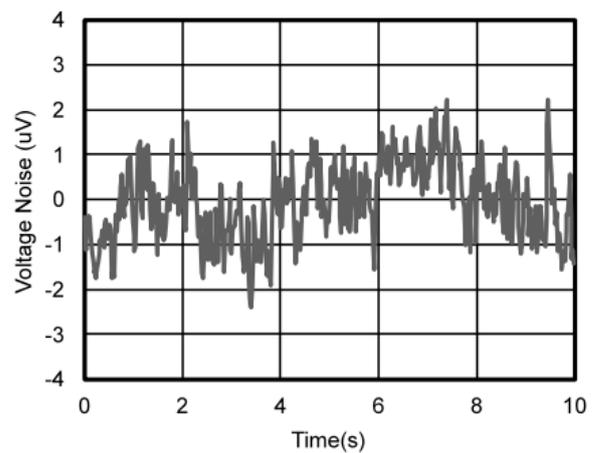


Figure 18. 0.1-Hz to 10-Hz Voltage Noise

## Detailed Description

### Overview

The TPA173x series is a new family of low-power, rail-to-rail input and output op amplifiers. These devices operate from 4.5 V to 36 V, and are unity-gain stable and designed for a wide range of general-purpose applications.

### Functional Block Diagram


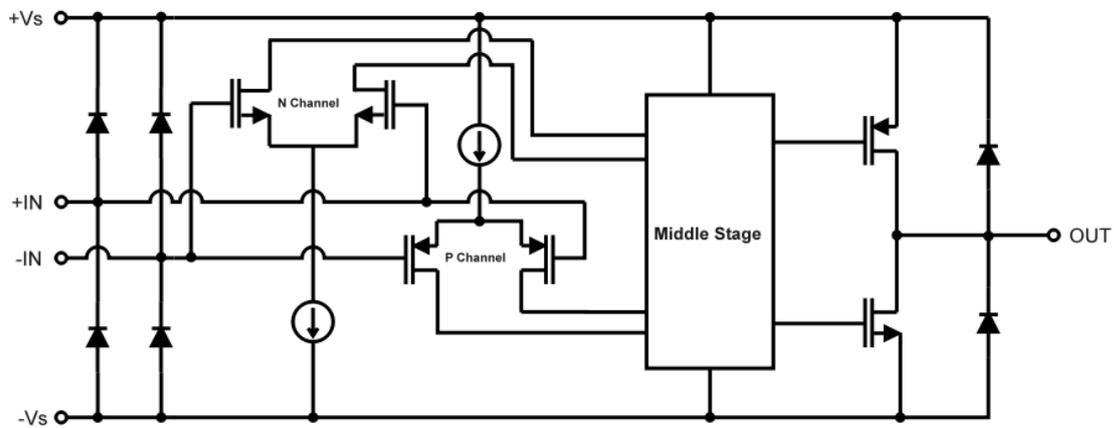


Figure 19. Functional Block Diagram

### Tape and Reel Information

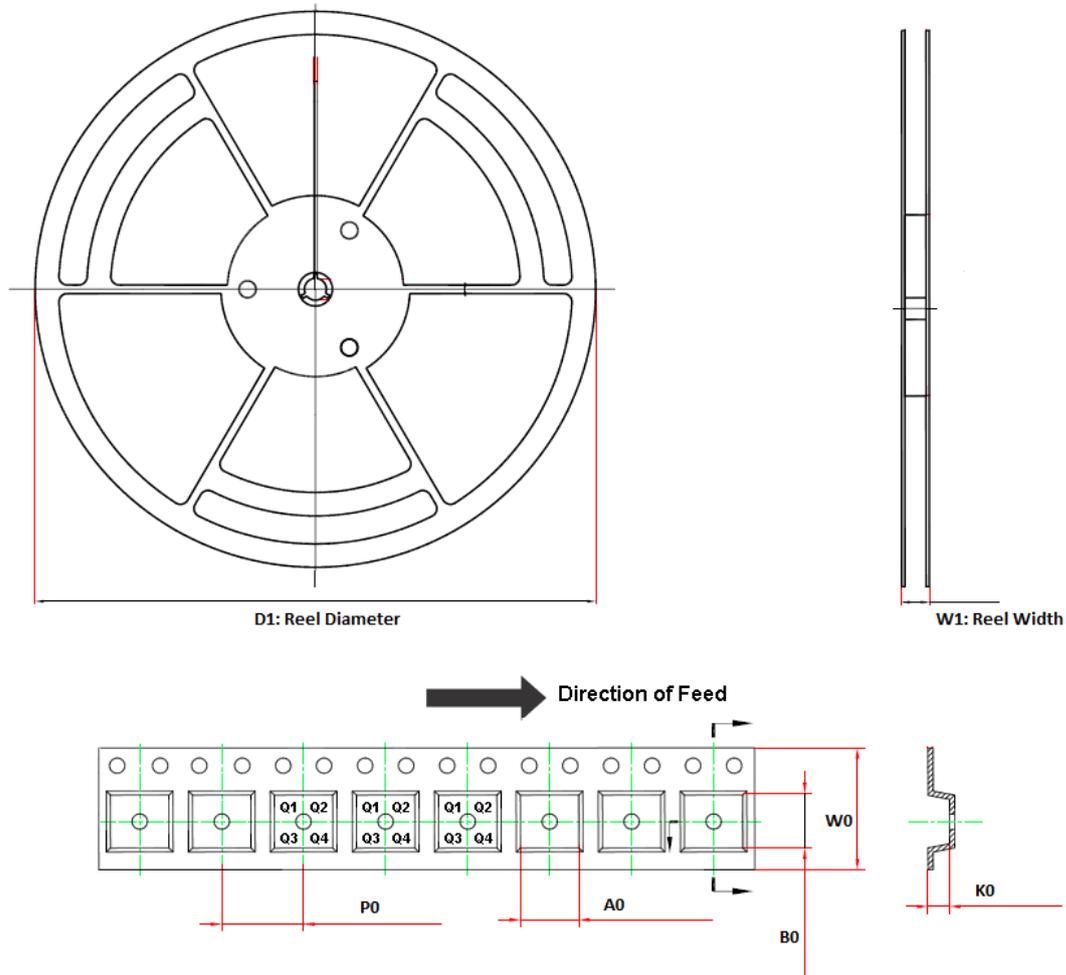


Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) (1)	B0 (mm) (1)	K0 (mm) (1)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPA1731-S5TR	SOT23-5	180	12	3.3	3.25	1.4	4	8	Q3
TPA1731-SO1R	SOP8	330	17.6	6.5	5.4	2	8	12	Q1
TPA1732-VS1R	MSOP8	330	17.6	5.3	3.4	1.3	8	12	Q1
TPA1732-SO1R	SOP8	330	17.6	6.5	5.4	2	8	12	Q1
TPA1734-TS2R	TSSOP14	330	17.6	6.8	5.5	1.5	8	12	Q1
TPA1734-SO2R	SOP14	330	21.6	6.5	9.0	2.1	8	16	Q1

(1) The value is for reference only. Contact the 3PEAK factory for more information.

Package Outline Dimensions


SOT23-5

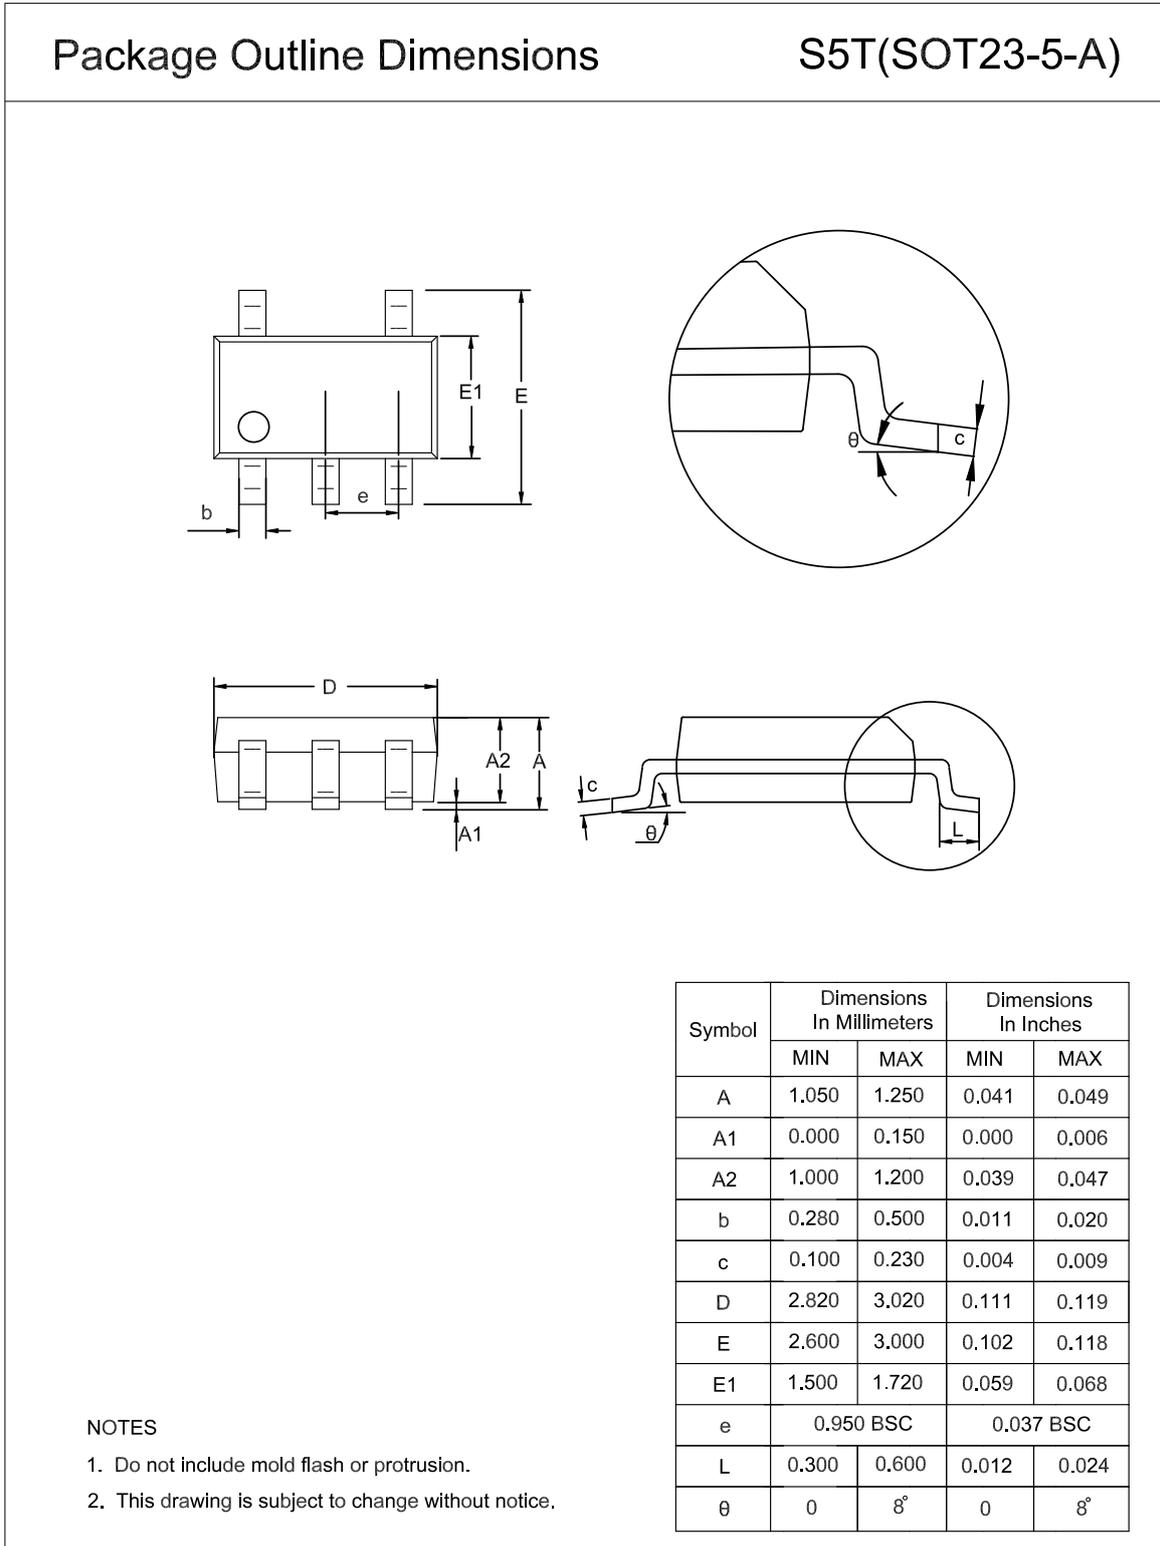

SOP8

Package Outline Dimensions

SO1(SOP-8-A)

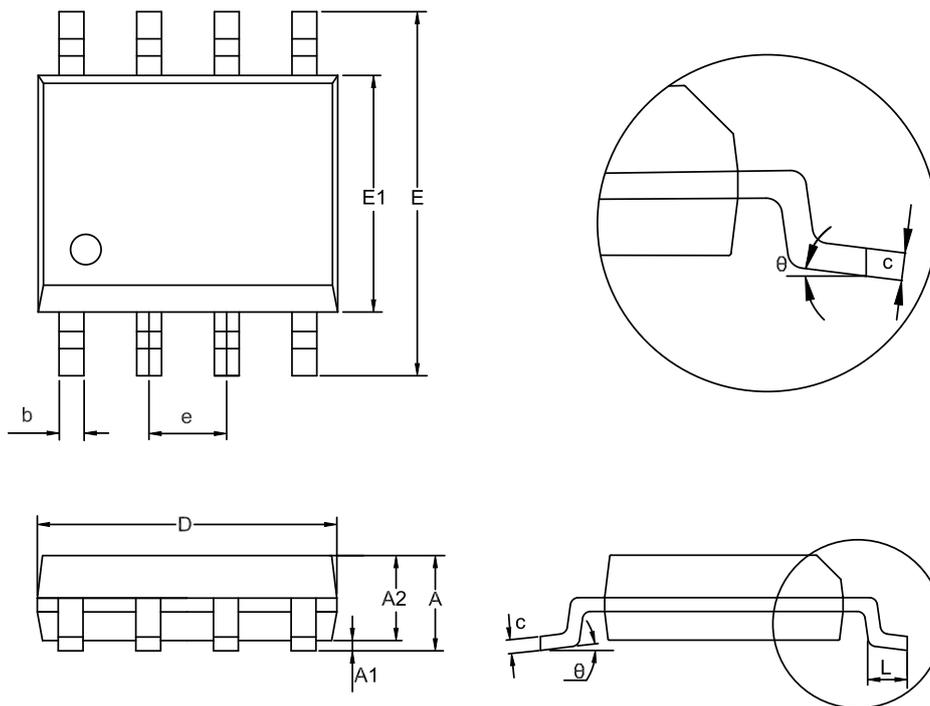

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.550	0.049	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.000	0.016	0.039
theta	0	8°	0	8°





NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

MSOP8

Package Outline Dimensions

VS1(MSOP-8-A)

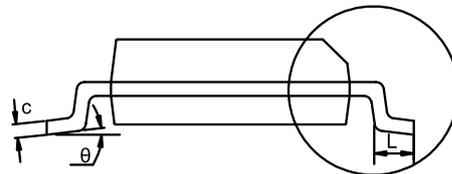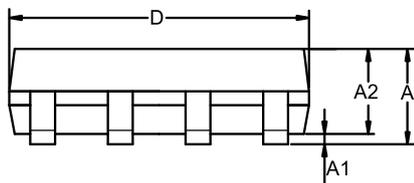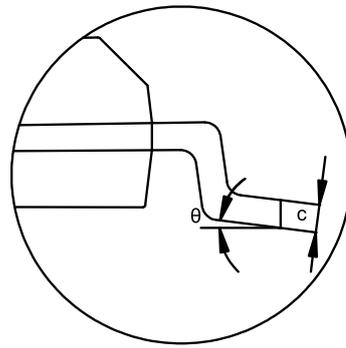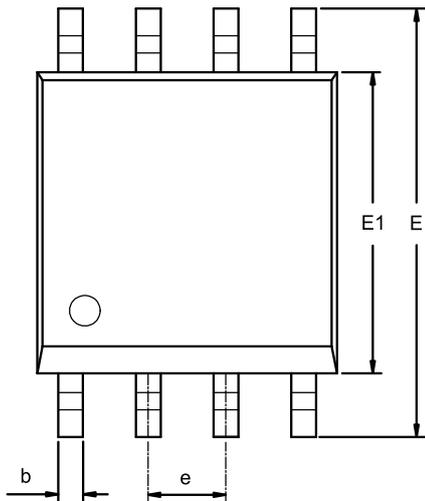

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.800	1.100	0.031	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	4.700	5.100	0.185	0.201
E1	2.900	3.100	0.114	0.122
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
$\theta$	0	8°	0	8°




NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

SOP14

Package Outline Dimensions

SO2(SOP-14-A)

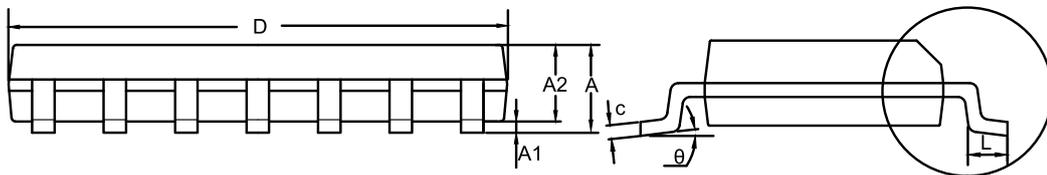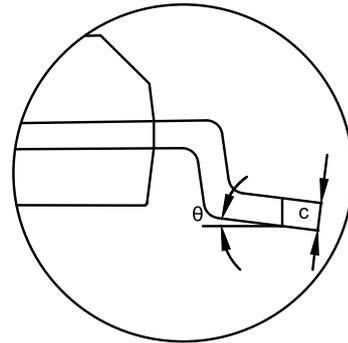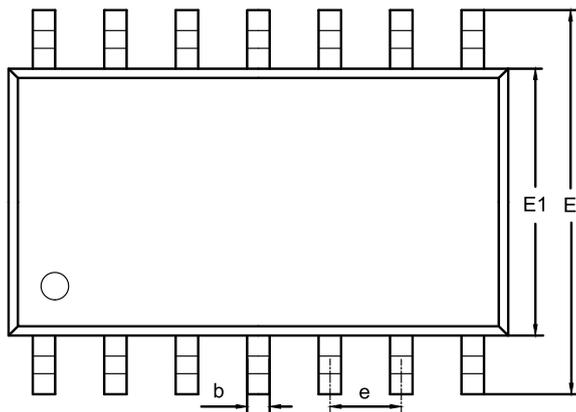

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.650	0.049	0.065
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	8.450	8.850	0.333	0.348
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
$\theta$	0	8°	0	8°




NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

TSSOP14

Package Outline Dimensions

TS2(TSSOP-14-A)

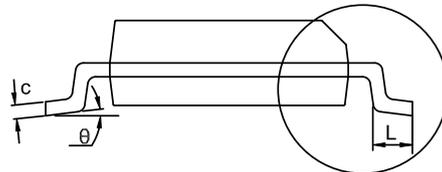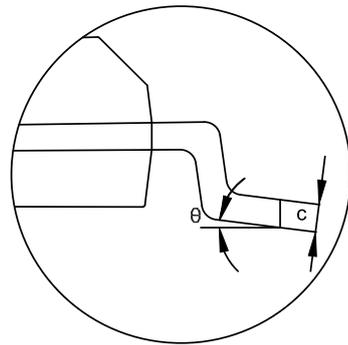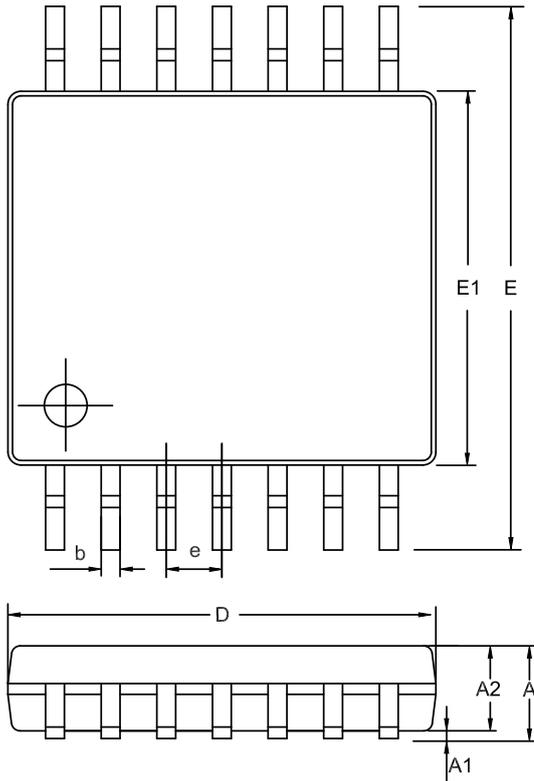

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.900	1.200	0.035	0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	4.900	5.100	0.193	0.201
E	6.200	6.600	0.244	0.260
E1	4.300	4.500	0.169	0.177
e	0.650 BSC		0.026 BSC	
L	0.450	0.750	0.018	0.030
$\theta$	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

## Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPA1731-SO1R <sup>(1)</sup>	-40 to 125°C	SOP8	1731	1	Tape and Reel, 4000	Green
TPA1731-S5TR	-40 to 125°C	SOT23-5	173	3	Tape and Reel, 3000	Green
TPA1732-SO1R	-40 to 125°C	SOP8	1732	1	Tape and Reel, 4000	Green
TPA1732-VS1R	-40 to 125°C	MSOP8	1732	3	Tape and Reel, 3000	Green
TPA1734-SO2R <sup>(1)</sup>	-40 to 125°C	SOP14	1734	1	Tape and Reel, 2500	Green
TPA1734-VS2R <sup>(1)</sup>	-40 to 125°C	TSSOP14	1734	1	Tape and Reel, 3000	Green

(1) For future products, contact the 3PEAK factory for more information and samples.

**Green:** 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

## **IMPORTANT NOTICE AND DISCLAIMER**

**Copyright**© 3PEAK 2012-2025. All rights reserved.

**Trademarks.** Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

**Performance Information.** Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

**Disclaimer.** 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.