

Features

- Power Supply Voltage: 1.8 V to 5.5 V
- Low Supply Current: 350 μ A per channel
- Propagation Delay: 55 ns
- Offset Voltage: ± 6 mV
- Input Common-Mode Range Extends 100 mV
- Push-Pull Output
- Qualified for Automotive Applications with AEC-Q100 Reliability Test

Description

The TPA2031Q-S5TR-S is the newest comparator with 55-ns propagation delay. The device is optimized for single +3-V or +5-V operation. The input common-mode range extends 100 mV beyond the rail, and the outputs is push-pull and can sink or source 1 mA to within 200 mV of the power supply rail.

The devices are specified for the automotive temperature range from -40°C to $+125^{\circ}\text{C}$.

Applications

- On-Board Charger
- Motor Control
- Precision Signal Condition
- Battery Management System

Typical Application Circuit

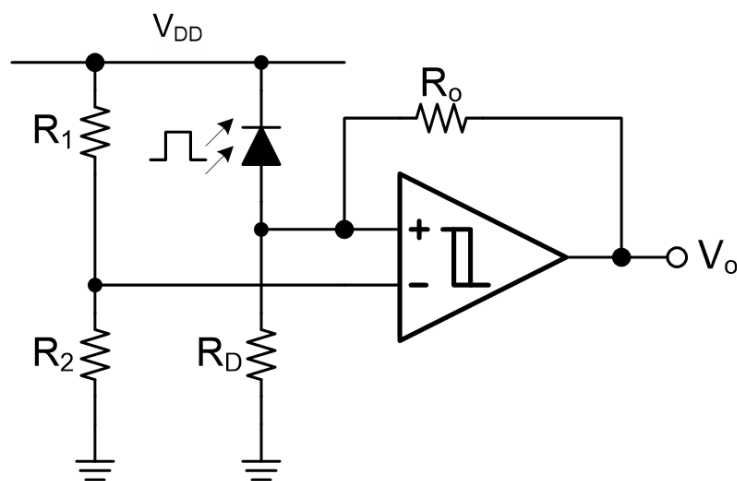


Table of Contents

Features	1
Applications	1
Description	1
Typical Application Circuit	1
Revision History	3
Pin Configuration and Functions	4
Specifications	5
Absolute Maximum Ratings ⁽¹⁾	5
ESD, Electrostatic Discharge Protection.....	5
Recommended Operating Conditions.....	5
Thermal Information.....	5
Electrical Characteristics.....	6
Electrical Characteristics (continued).....	8
Electrical Characteristics (continued).....	10
Typical Performance Characteristics.....	12
Detailed Description	14
Overview.....	14
Functional Block Diagram.....	14
Application and Implementation	15
Application Information	15
Typical Application.....	16
Tape and Reel Information	17
Package Outline Dimensions	18
SOT23-5.....	18
Order Information	19
IMPORTANT NOTICE AND DISCLAIMER	20

Revision History

Date	Revision	Notes
2023-09-06	Rev.A.0	Initial version.

Pin Configuration and Functions

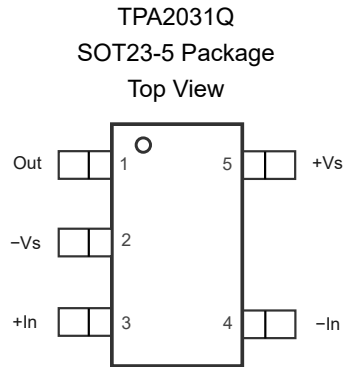


Table 1. Pin Functions: TPA2031Q

Pin No.	Name	I/O	Description
1	Out	O	Output
2	-Vs	-	Negative power supply
3	+In	I	Noninverting input
4	-In	I	Inverting input
5	+Vs	-	Positive power supply

5-V, 55-ns Comparators with Push-Pull Output

Specifications

Absolute Maximum Ratings ⁽¹⁾

Parameter		Min	Max	Unit
	Supply Voltage, (+V _S) – (–V _S)		6.5	V
	Input Voltage	(–V _S) – 0.3	(V _S) + 0.3	V
	Input Current: +IN, –IN ⁽²⁾	–10	+10	mA
	Output Current: OUT	–10	+10	mA
	Output Short-Circuit Duration ⁽³⁾		Thermal protection	
T _J	Maximum Junction Temperature		150	°C
T _A	Operating Temperature Range	–40	125	°C
T _{STG}	Storage Temperature Range	–65	150	°C
T _L	Lead Temperature (Soldering 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The inputs are protected by ESD protection diodes to each power supply. If the input extends more than 500 mV beyond the negative power supply, the input current should be limited to less than 10 mA.

(3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many comparator are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

ESD, Electrostatic Discharge Protection

Parameter		Condition	Level	Unit
HBM	Human Body Model ESD	AEC Q100-002	4	kV
CDM	Charged Device Model ESD	AEC Q100-011	1.5	kV

Recommended Operating Conditions

Parameter		Min	Typ	Max	Unit
V _S	Supply Voltage, (+V _S) – (–V _S)	1.8		5.5	V

Thermal Information

Package Type	θ _{JA}	θ _{JC}	Unit
SOT23-5	250	81	°C/W

5-V, 55-ns Comparators with Push-Pull Output
Electrical Characteristics

All test conditions: $V_S = 5\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Parameter		Conditions	Min	Typ	Max	Unit
Power Supply						
I _Q	Quiescent Current per Comparator	V _{CM} = 0 V		350	500	μA
		V _{CM} = 0 V, T _A = −40°C to 125°C			600	μA
PSRR	Power Supply Rejection Ratio	V _S = 2.7 V to 5.5 V, V _{CM} = 0 V	60	75		dB
		V _S = 2.7 V to 5.5 V, V _{CM} = 0 V, T _A = −40°C to 125°C	55			dB
Input Characteristics						
V _{OS}	Input Offset Voltage ⁽¹⁾	V _{CM} = 2.5 V,	−6		6	mV
		V _{CM} = 2.5 V, T _A = −40°C to 125°C	−7		7	mV
V _{OS} TC	Input Offset Voltage Drift ⁽²⁾	T _A = −40°C to 125°C		4		μV/°C
I _B	Input Bias Current	V _{CM} = 2.5 V,		1	20	nA
		V _{CM} = 2.5 V, T _A = −40°C to 125°C			25	nA
I _{OS}	Input Offset Current	V _{CM} = 2.5 V		0.5	8	nA
		V _{CM} = 2.5 V, T _A = −40°C to 125°C			10	nA
V _{DIFF}	Differential Mode Input Voltage Range ⁽⁴⁾	T _A = −40°C to 125°C	−5		5	V
V _{CMR}	Common-mode Input Voltage Range	T _A = −40°C to 125°C	(V-) − 0.1		(V+) + 0.1	V
CMRR	Common Mode Rejection Ratio	V _{CM} = 0 V to 5 V	70	95		dB
		V _{CM} = 0 V to 5 V, T _A = −40°C to 125°C	65			dB
Output Characteristics						
V _{OH}	Output Voltage High	I _{LOAD} = 4 mA	4.8	4.84		V
		I _{LOAD} = 4 mA, T _A = −40°C to 125°C	4.7			V
V _{OL}	Output Voltage Low	I _{LOAD} = 4 mA		130	180	mV
		I _{LOAD} = 4 mA, T _A = −40°C to 125°C			250	mV
I _{SC}	Short-circuit current			40		mA
Switching Characteristics ⁽³⁾						
T _{PLH}	Propagation Delay (Low-to-High)	V _{CM} = 0 V, Overdrive = 100 mV, C _{LOAD} = 50 pF		42	75	ns
		V _{CM} = 0 V, Overdrive = 100 mV, C _{LOAD} = 50 pF, T _A = −40°C to 125°C			100	ns
T _{PLH}	Propagation Delay (Low-to-High)	V _{CM} = 0 V, Overdrive = 20 mV, C _{LOAD} = 50 pF		55	95	ns

5-V, 55-ns Comparators with Push-Pull Output

Parameter		Conditions	Min	Typ	Max	Unit
T_{PLH}	Propagation Delay (Low-to-High)	$V_{CM} = 0\text{ V}$, Overdrive = 20 mV, $C_{LOAD} = 50\text{ pF}$, $T_A = -40^\circ\text{C}$ to 125°C			125	ns
T_{PHL}	Propagation Delay (High -to-Low)	$V_{CM} = 0\text{ V}$, Overdrive = 100 mV, $C_{LOAD} = 50\text{ pF}$		45	75	ns
		$V_{CM} = 0\text{ V}$, Overdrive = 100 mV, $C_{LOAD} = 50\text{ pF}$, $T_A = -40^\circ\text{C}$ to 125°C			100	ns
T_{PHL}	Propagation Delay (High -to-Low)	$V_{CM} = 0\text{ V}$, Overdrive = 20 mV, $C_{LOAD} = 50\text{ pF}$		55	95	ns
		$V_{CM} = 0\text{ V}$, Overdrive = 20 mV, $C_{LOAD} = 50\text{ pF}$, $T_A = -40^\circ\text{C}$ to 125°C			125	ns
T_{RISE}	Rising Time ⁽²⁾ ⁽⁵⁾	$f = 10\text{ kHz}$, $C_{LOAD} = 50\text{ pF}$, $R_{LOAD} = 10\text{ k}\Omega$, Overdrive = 100 mV		5.5		ns
T_{FALL}	Falling Time ⁽²⁾ ⁽⁵⁾	$f = 10\text{ kHz}$, $C_{LOAD} = 50\text{ pF}$, $R_{LOAD} = 10\text{ k}\Omega$, Overdrive = 100 mV		5.5		ns
T_{PDSKEW}	Propagation Delay Skew ⁽²⁾	$V_{CM} = 0$, Overdrive = 100mV, $T_{PDSKEW} = T_{PHL} - T_{PLH} $		5		ns

(1) The input offset voltage is the average of the input-referred trip points. The input hysteresis is the difference between the input-referred trip points.

(2) Provided by bench test and design simulation.

(3) Delay time is measured from mid-point of input to mid-point of output.

(4) Provided by design simulation.

(5) Measured between 10% of V_S and 90% of V_S .

5-V, 55-ns Comparators with Push-Pull Output

Electrical Characteristics (continued)

All test conditions: $V_S = 3.3\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Parameter		Conditions	Min	Typ	Max	Unit
Power Supply						
I _Q	Quiescent Current per Amplifier	V _{CM} = 0 V,		350	500	μA
		V _{CM} = 0 V, T _A = -40°C to 125°C			600	μA
Input Characteristics						
V _{OS}	Input Offset Voltage ⁽¹⁾	V _{CM} = 1.65 V,	-6		6	mV
		V _{CM} = 1.65 V, T _A = -40°C to 125°C	-7		7	mV
V _{OS} TC	Input Offset Voltage Drift ⁽²⁾	T _A = -40°C to 125°C		4		μV/°C
I _B	Input Bias Current	V _{CM} = 1.65 V,		1	20	nA
		V _{CM} = 1.65 V, T _A = -40°C to 125°C			25	nA
I _{OS}	Input Offset Current	V _{CM} = 1.65 V,		0.5	8	nA
		V _{CM} = 1.65 V, T _A = -40°C to 125°C			10	nA
V _{DIFF}	Differential Mode Input Voltage Range ⁽⁴⁾	T _A = -40°C to 125°C	-3.3		3.3	V
V _{CMR}	Common-mode Input Voltage Range	T _A = -40°C to 125°C	(V-) - 0.1		(V+) + 0.1	V
CMRR	Common Mode Rejection Ratio	V _{CM} = 0 V to 3.3 V	61	80		dB
		V _{CM} = 0 V to 3.3 V, T _A = -40°C to 125°C	60			dB
Output Characteristics						
V _{OH}	Output Voltage High	I _{LOAD} = 1 mA	3.1	3.2		V
		I _{LOAD} = 1 mA, T _A = -40°C to 125°C	3			V
V _{OL}	Output Voltage Low	I _{LOAD} = 1 mA		40	150	mV
		I _{LOAD} = 1 mA, T _A = -40°C to 125°C			200	mV
I _{SC}	Short-circuit current			25		mA
Switching Characteristics ⁽³⁾						
T _{PLH}	Propagation Delay (Low-to-High)	V _{CM} = 0 V, Overdrive = 100 mV, C _{LOAD} = 50 pF		40	65	ns
		V _{CM} = 0 V, Overdrive = 100 mV, C _{LOAD} = 50 pF, T _A = -40°C to 125°C			85	ns
T _{PLH}	Propagation Delay (Low-to-High)	V _{CM} = 0 V, Overdrive = 20 mV,		50	80	ns

5-V, 55-ns Comparators with Push-Pull Output

Parameter	Conditions	Min	Typ	Max	Unit
	$C_{LOAD} = 50 \text{ pF}$				
	$V_{CM} = 0 \text{ V}$, Overdrive = 20 mV, $C_{LOAD} = 50 \text{ pF}$, $T_A = -40^\circ\text{C}$ to 125°C			115	ns
T_{PHL}	Propagation Delay (High -to-Low) $V_{CM} = 0 \text{ V}$, Overdrive = 100 mV, $C_{LOAD} = 50 \text{ pF}$		40	65	ns
	$V_{CM} = 0 \text{ V}$, Overdrive = 100 mV, $C_{LOAD} = 50 \text{ pF}$, $T_A = -40^\circ\text{C}$ to 125°C			85	ns
T_{PHL}	Propagation Delay (High -to-Low) $V_{CM} = 0 \text{ V}$, Overdrive = 20 mV, $C_{LOAD} = 50 \text{ pF}$		50	80	ns
	$V_{CM} = 0 \text{ V}$, Overdrive = 20 mV, $C_{LOAD} = 50 \text{ pF}$, $T_A = -40^\circ\text{C}$ to 125°C			115	ns
T_{RISE}	Rising Time ^{(2) (5)} $f = 10 \text{ kHz}$, $C_{LOAD} = 50 \text{ pF}$, $R_{LOAD} = 10 \text{ k}\Omega$, Overdrive = 100 mV		8		ns
T_{FALL}	Falling Time ^{(2) (5)} $f = 10 \text{ kHz}$, $C_{LOAD} = 50 \text{ pF}$, $R_{LOAD} = 10 \text{ k}\Omega$, Overdrive = 100 mV		5		ns
T_{PDSKEW}	Propagation Delay Skew ⁽²⁾ $V_{CM} = 0$, Overdrive = 100mV, $T_{PDSKEW} = T_{PHL} - T_{PLH} $		5		ns

(1) The input offset voltage is the average of the input-referred trip points. The input hysteresis is the difference between the input-referred trip points.

(2) Provided by bench test and design simulation.

(3) Delay time is measured from mid-point of input to mid-point of output.

(4) Provided by design simulation.

(5) Measured between 10% of V_S and 90% of V_S .

5-V, 55-ns Comparators with Push-Pull Output
Electrical Characteristics (continued)

All test conditions: $V_S = 1.8\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Parameter		Conditions	Min	Typ	Max	Unit
Power Supply						
I _Q	Quiescent Current per Amplifier	V _{CM} = 0 V,		300	340	μA
		V _{CM} = 0 V, T _A = −40°C to 125°C			370	μA
Input Characteristics						
V _{OS}	Input Offset Voltage ⁽¹⁾	V _{CM} = 0.9 V,	−6		6	mV
		V _{CM} = 0.9 V, T _A = −40°C to 125°C	−7		7	mV
V _{OS} TC	Input Offset Voltage Drift ⁽²⁾	T _A = −40°C to 125°C		4		μV/°C
I _B	Input Bias Current	V _{CM} = 0.9 V,		1	20	nA
		V _{CM} = 0.9 V, T _A = −40°C to 125°C			25	nA
I _{OS}	Input Offset Current	V _{CM} = 0.9 V,		0.5	8	nA
		V _{CM} = 0.9 V, T _A = −40°C to 125°C			10	nA
V _{DIFF}	Differential Mode Input Voltage Range ⁽⁴⁾	T _A = −40°C to 125°C	−1.8		1.8	V
V _{CMR}	Common-mode Input Voltage Range	T _A = −40°C to 125°C	(V-) − 0.1		(V+) + 0.1	V
CMRR	Common Mode Rejection Ratio	V _{CM} = 0 V to 1.8 V	61	80		dB
		V _{CM} = 0 V to 1.8 V, T _A = −40°C to 125°C	60			dB
Output Characteristics						
V _{OH}	Output Voltage High	I _{LOAD} = 1 mA	1.6	1.7		V
		I _{LOAD} = 1 mA, T _A = −40°C to 125°C	1.5			V
V _{OL}	Output Voltage Low	I _{LOAD} = 1 mA		100	150	mV
		I _{LOAD} = 1 mA, T _A = −40°C to 125°C			200	mV
I _{SC}	Short-circuit current			5		mA
Switching Characteristics ⁽³⁾						
T _{PLH}	Propagation Delay (Low-to-High)	V _{CM} = 0 V, Overdrive = 100 mV, C _{LOAD} = 50 pF		50	80	ns
		V _{CM} = 0 V, Overdrive = 100 mV, C _{LOAD} = 50 pF, T _A = −40°C to 125°C			100	ns
T _{PLH}	Propagation Delay (Low-to-High)	V _{CM} = 0 V, Overdrive = 20 mV, C _{LOAD} = 50 pF		60	110	ns

5-V, 55-ns Comparators with Push-Pull Output

Parameter		Conditions	Min	Typ	Max	Unit
T_{PLH}	Propagation Delay (Low-to-High)	$V_{CM} = 0\text{ V}$, Overdrive = 20 mV, $C_{LOAD} = 50\text{ pF}$, $T_A = -40^\circ\text{C}$ to 125°C			150	ns
T_{PHL}	Propagation Delay (High -to-Low)	$V_{CM} = 0\text{ V}$, Overdrive = 100 mV, $C_{LOAD} = 50\text{ pF}$		50	80	ns
		$V_{CM} = 0\text{ V}$, Overdrive = 100 mV, $C_{LOAD} = 50\text{ pF}$, $T_A = -40^\circ\text{C}$ to 125°C			100	ns
T_{PHL}	Propagation Delay (High -to-Low)	$V_{CM} = 0\text{ V}$, Overdrive = 20 mV, $C_{LOAD} = 50\text{ pF}$		60	110	ns
		$V_{CM} = 0\text{ V}$, Overdrive = 20 mV, $C_{LOAD} = 50\text{ pF}$, $T_A = -40^\circ\text{C}$ to 125°C			150	ns
T_{RISE}	Rising Time ^{(2) (5)}	$f = 10\text{ kHz}$, $C_{LOAD} = 50\text{ pF}$, $R_{LOAD} = 10\text{ k}\Omega$, Overdrive = 100 mV		19		ns
T_{FALL}	Falling Time ^{(2) (5)}	$f = 10\text{ kHz}$, $C_{LOAD} = 50\text{ pF}$, $R_{LOAD} = 10\text{ k}\Omega$, Overdrive = 100 mV		15		ns
T_{PDSKEW}	Propagation Delay Skew ⁽²⁾	$V_{CM} = 0$, Overdrive = 100mV, $T_{PDSKEW} = T_{PHL} - T_{PLH} $		10		ns

(1) The input offset voltage is the average of the input-referred trip points. The input hysteresis is the difference between the input-referred trip points.

(2) Provided by bench test and design simulation.

(3) Delay time is measured from mid-point of input to mid-point of output.

(4) Provided by design simulation.

(5) Measured between 10% of V_s and 90% of V_s .

5-V, 55-ns Comparators with Push-Pull Output

Typical Performance Characteristics

All test conditions: $V_S = 5\text{ V}$, $V_{CM} = 0\text{ V}$, $V_{\text{overdrive}} = 100\text{ mV}$, $R_L = \text{Open}$, unless otherwise noted.

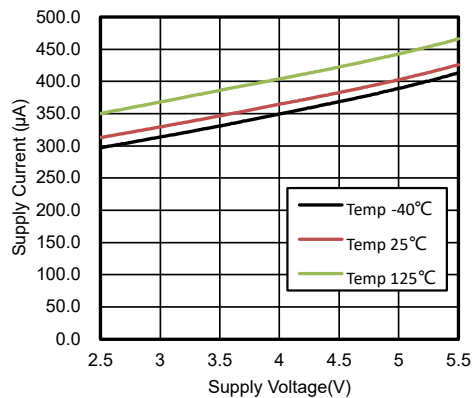


Figure 1. Supply Current vs. Supply Voltage, Output High

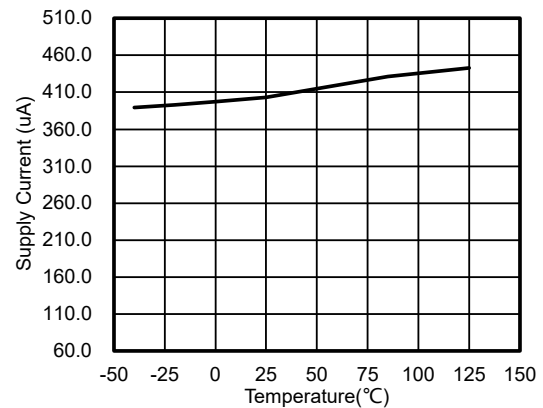


Figure 2. Supply Current vs. Temperature

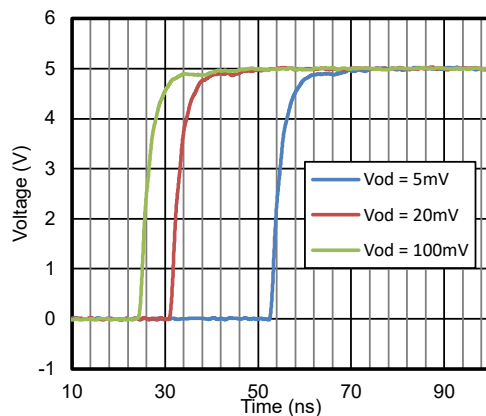


Figure 3. Propagation Delay, Low to High

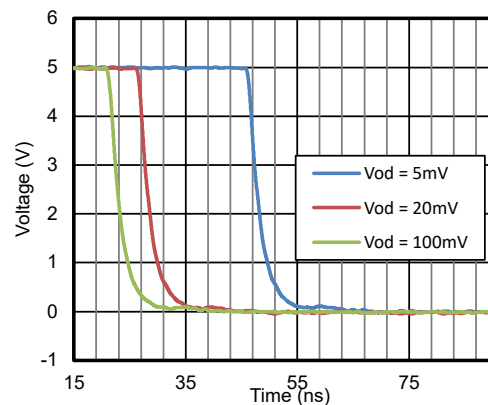


Figure 4. Propagation Delay, High to Low

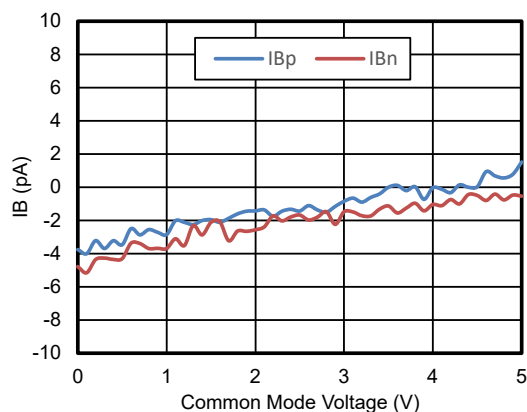


Figure 5. I_B vs Common-Mode Voltage

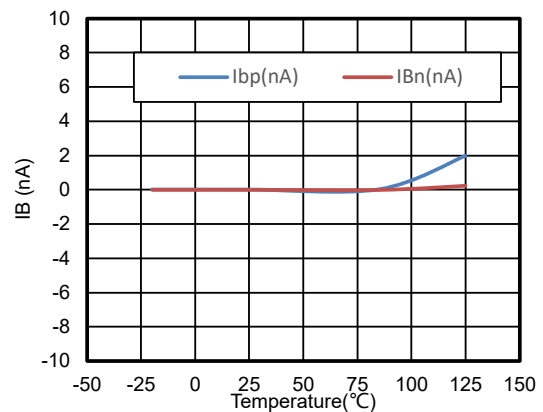


Figure 6. I_B vs Temperature

5-V, 55-ns Comparators with Push-Pull Output

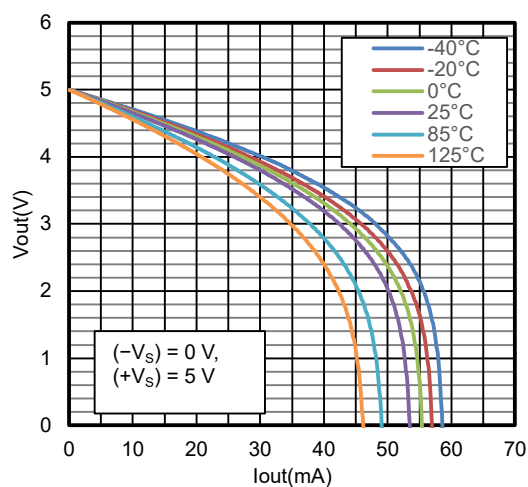


Figure 7. Output Voltage vs. Output Sourcing Current, 5 V

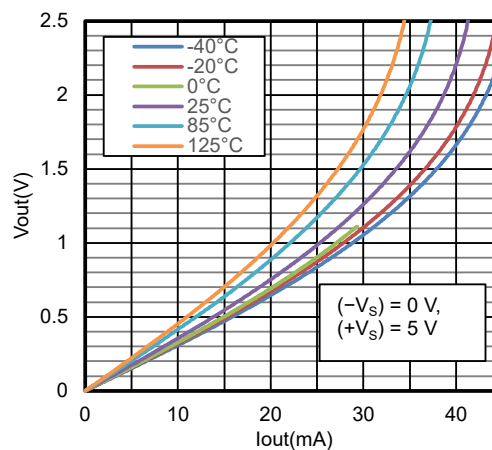


Figure 8. Output Voltage vs. Output Sinking Current, 5 V

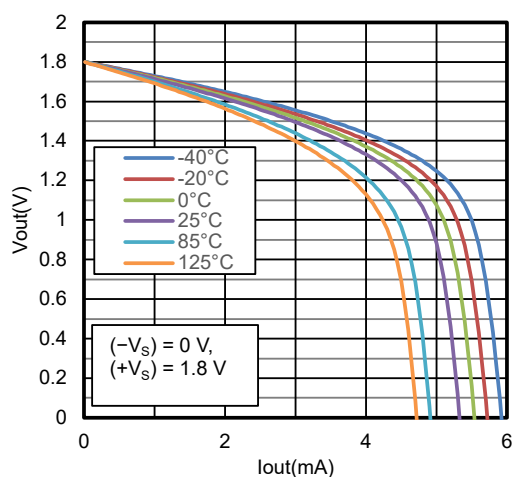


Figure 9. Output Voltage vs. Output Sourcing Current, 1.8 V

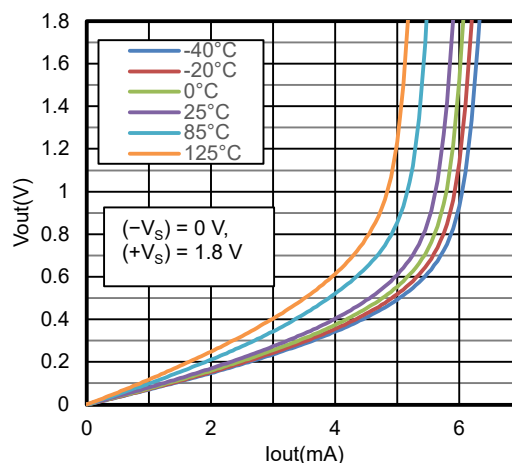


Figure 10. Output Voltage vs. Output Sinking Current, 1.8 V

Detailed Description

Overview

The TPA2031Q device is a micro-power comparator with push-pull output and low input offset voltage. Operating down to 1.8 V while only consuming only 350 μA per channel. The design of the TPA2031Q comparator includes an internal charge-pump that powers the input stage with an internal supply rail which is above the external supply (V_+). This internal supply rail allows the single differential input pair to operate and remain linear over a very wide input common-mode range. The TPA2031Q is ideally suited for portable, automotive, and industrial applications.

Functional Block Diagram

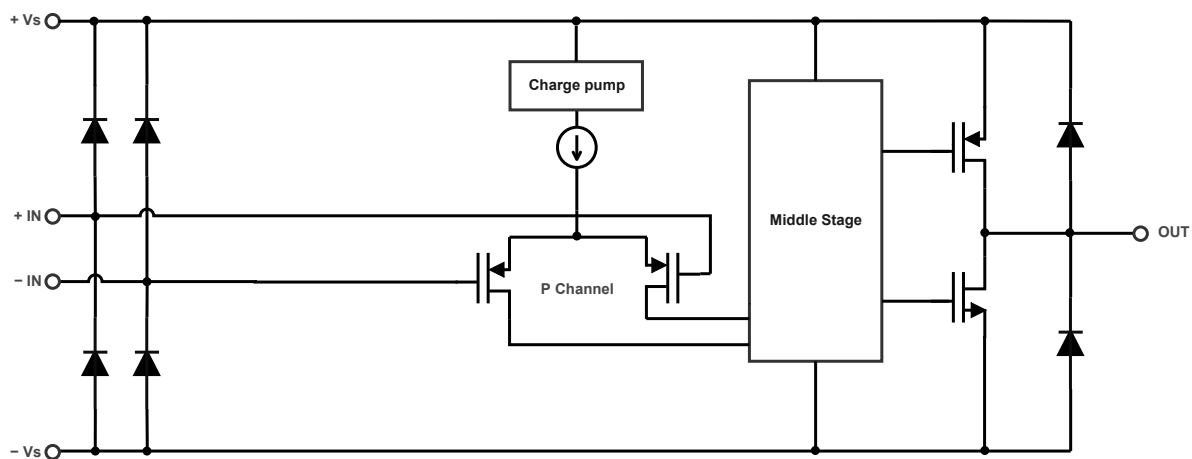


Figure 11. Functional Block Diagram

Application and Implementation

Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Application Information

Power Supply Layout and Bypass

The power supply pin of TPA2031 is supposed to have a local bypass capacitor (i.e., 0.01 μF to 0.1 μF) within 2 mm for good high-frequency performance. It can also use a bulk capacitor (i.e., 1 μF or larger) within 100 mm to provide large, slow currents. This bulk capacitor can be shared with other analog parts.

Good ground layout improves performance by decreasing the amount of stray capacitance and noise at the inputs and outputs of comparator. To decrease stray capacitance, minimize PCB lengths and resistor leads, and place external components as close to the comparator pins as possible.

Operation Outside of the Common Input Voltage Range

The following is a list of input voltage situation and their outcomes:

1. When both $-IN$ and $+IN$ are within the common-mode range:
 - a. If the voltage at the $-IN$ pin is higher than the voltage at the $+IN$ pin and the offset voltage, the output is low and the output MOSFET is sinking current.
 - b. If the voltage at the $-IN$ pin is lower than the voltage at the $+IN$ pin and the offset voltage, the output is high and output MOSFET is sourcing current.
2. When the voltage at the $-IN$ pin is higher than the common-mode voltage range and the voltage at the $+IN$ pin is within the common-mode voltage range, the output is low and the output MOSFET is sinking current.
3. When the voltage at the $+IN$ pin is higher than the common-mode voltage range and the voltage at the $-IN$ pin is within the common-mode voltage range, the output is high impedance.
4. When the voltage at the $-IN$ and $+IN$ pins are both higher than the common-mode voltage range, the output is in an uncertain state.

Typical Application

IR Receiver

The device is an ideal candidate to be used as an infrared receiver shown in Figure 4. The infrared photo diode creates a current relative to the amount of infrared light present. The current creates a voltage across R_D . When this voltage level crosses the voltage applied by the voltage divider to the inverting input, the output transitions. Optional R_o provides additional hysteresis for noise immunity.


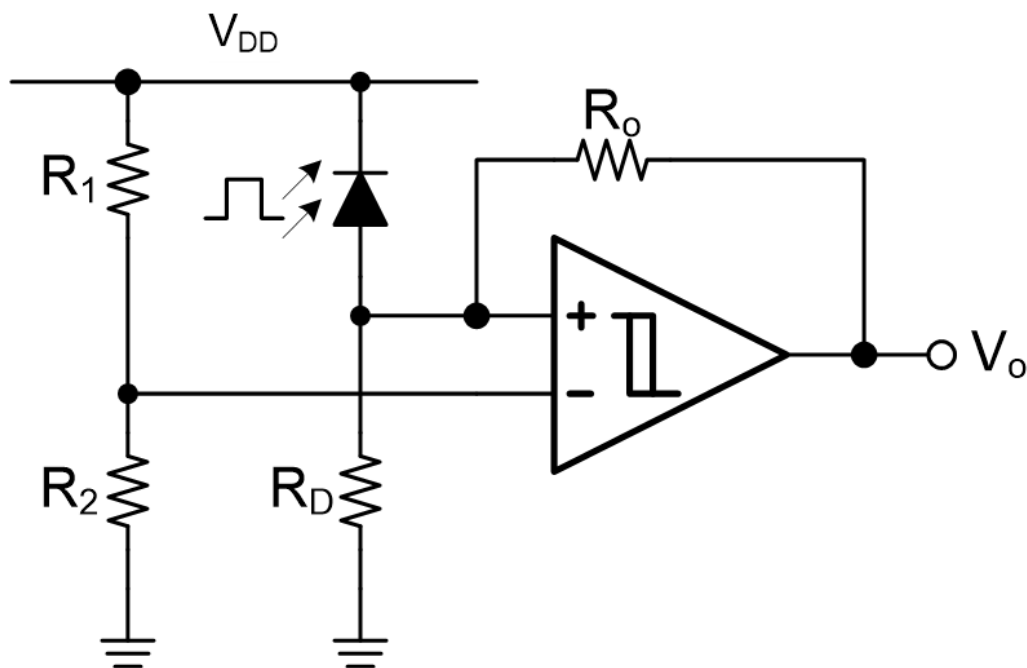


Figure 12. Typical Application Circuit


Tape and Reel Information

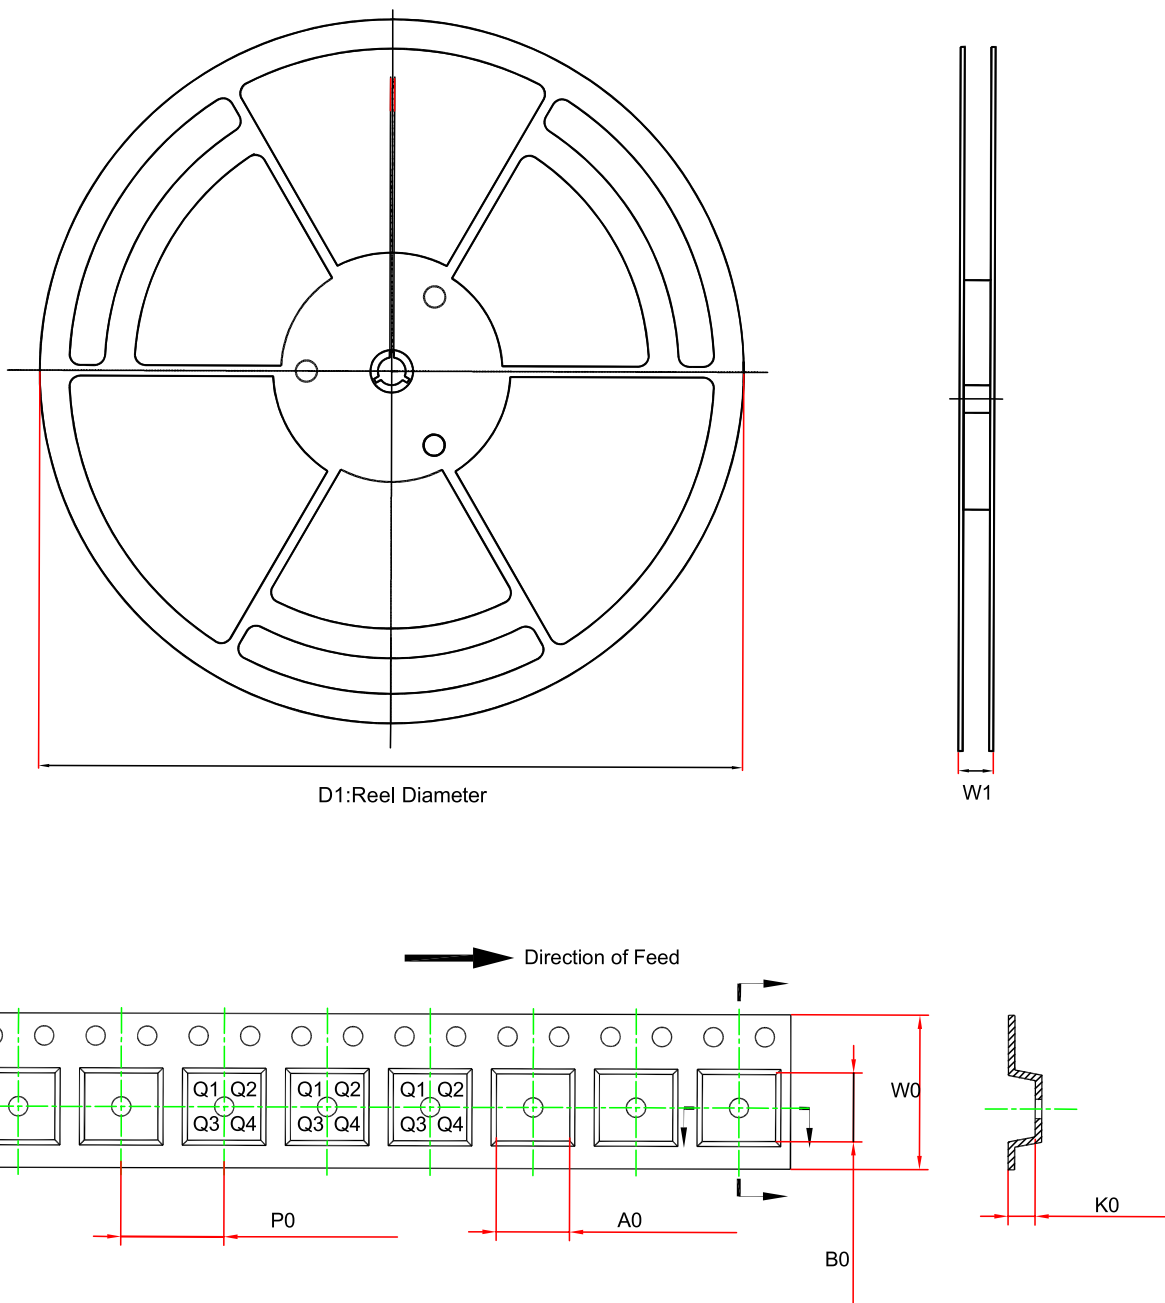

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPA2031Q-S5TR-S	SOT23-5	179	12	3.3	3.25	1.4	4	8	Q3

Package Outline Dimensions

SOT23-5

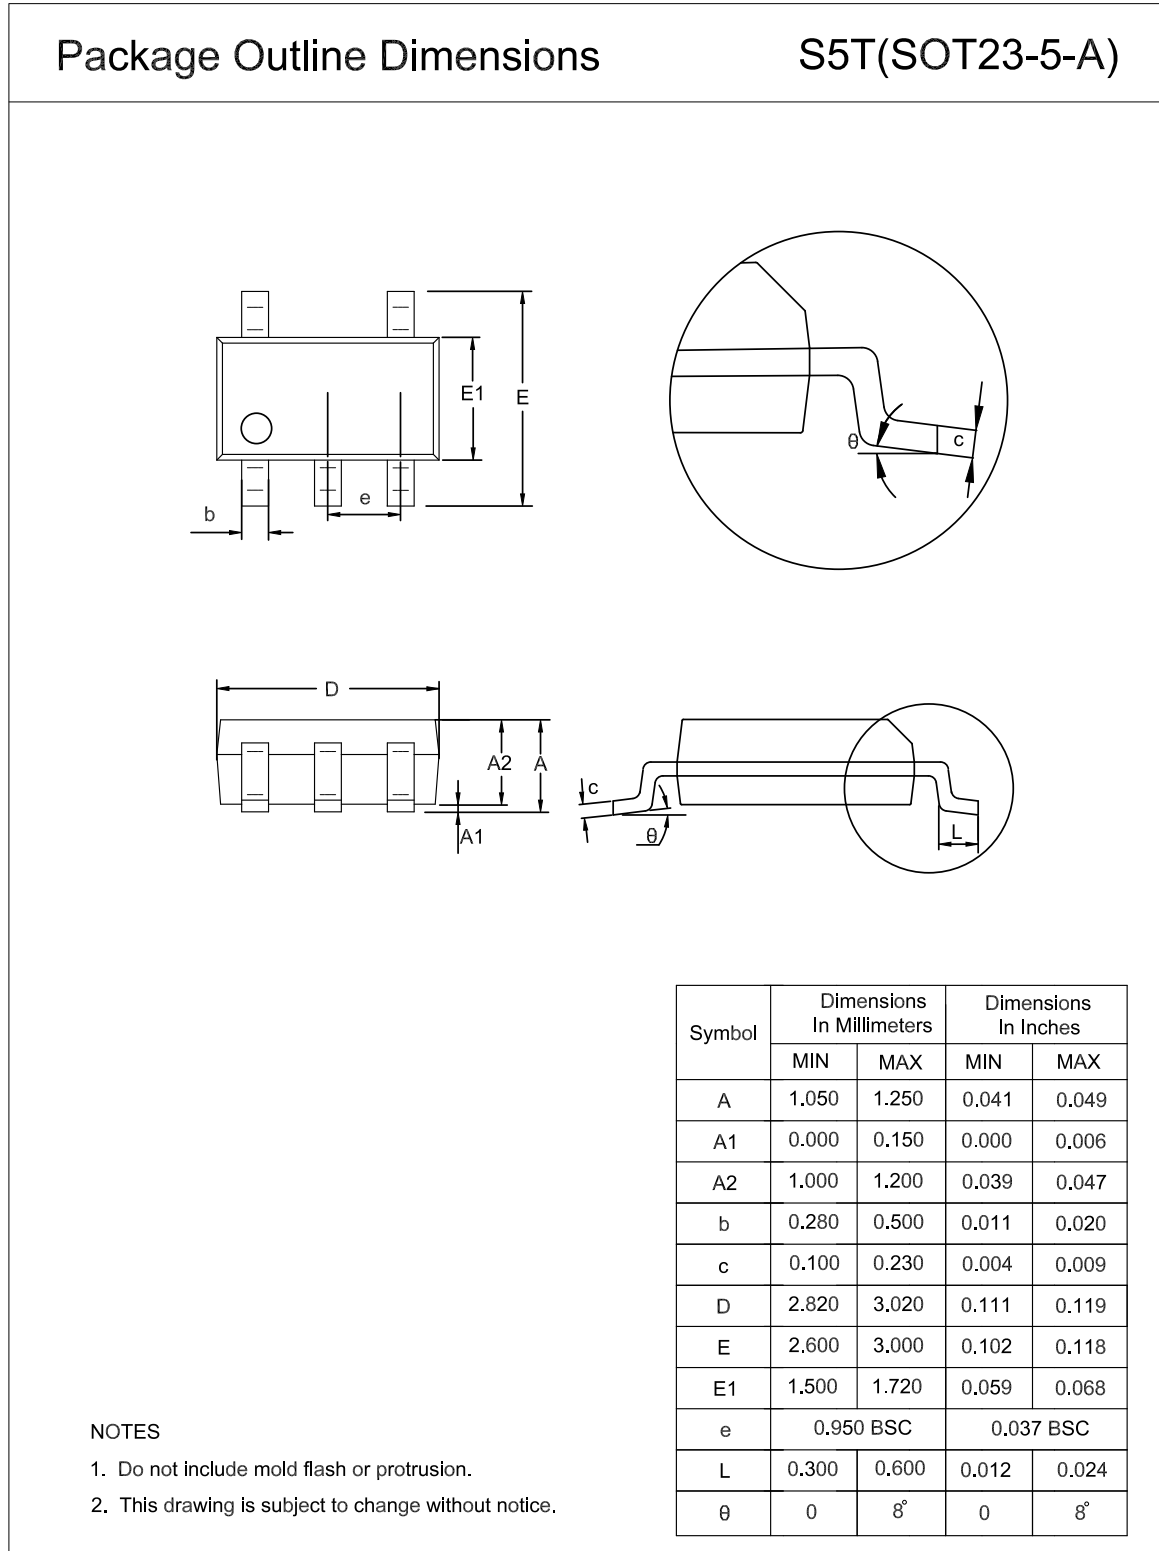

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPA2031Q-S5TR-S	-40 to 125°C	SOT23-5	31Q	MSL3	Tape and Reel,3000	Green

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2023. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.