

Features

- Supply Voltage: 2.5 V to 5.5 V or ± 1.25 V to ± 2.75 V
- Offset Voltage: ± 1.5 mV Maximum at 25°C
- GBWP: 10 MHz, Slew Rate: 3 V/ μ s
- Rail-to-Rail Input and Output
- Low Noise: 10 nV/ $\sqrt{\text{Hz}}$ at 1 kHz
- Low 1/f Noise: 20 nV/ $\sqrt{\text{Hz}}$ at 10 Hz
- Low Power: 1.5 mA Maximum per Channel
- -40°C to 125°C Operation Temperature Range

Applications

- Audio Equipment
- Instrumentation
- Sensor Interface
- IoT Device


Description

The TPA655x series op-amps are single, dual, and quad RRIO op-amps with low offset, low power, and stable high-frequency response. They incorporate 3PEAK's proprietary and patented design techniques to achieve 10-MHz bandwidth, 3-V/ μ s slew rate, and low distortion.

The TPA655x series op-amps have 1- μ V_{PP} voltage noise at 0.1 Hz to 10 Hz, because the bipolar transistor in the input stage with low 1/f noise is used as the input stage.

Considering the requirement of the low standby power in some special applications, there is a shutdown function which is TPA6551N with only 0.5- μ A shutdown current.

Typical Application Circuit

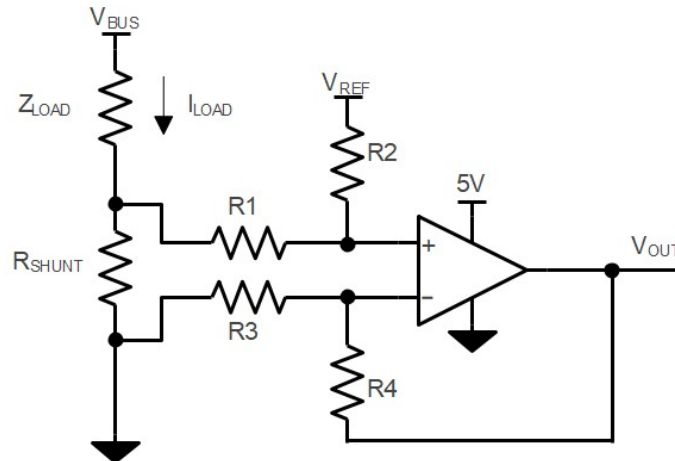

$$V_{OUT} = (I_{LOAD} \times R_{SHUNT}) \times (R2 / R1) + V_{REF}$$

$$\text{When } R3 = R1, R2 = R4, R_{SHUNT} \ll R1$$

Table of Contents

Features	1
Applications	1
Description	1
Typical Application Circuit	1
Revision History	3
Pin Configuration and Functions	4
Specifications	8
Absolute Maximum Ratings ⁽¹⁾	8
ESD, Electrostatic Discharge Protection.....	8
Recommended Operating Conditions.....	8
Thermal Information.....	9
Electrical Characteristics.....	10
Typical Performance Characteristics.....	12
Detailed Description	15
Overview.....	15
Functional Block Diagram.....	15
Feature Description.....	15
Application and Implementation	17
Application Information	17
Tape and Reel Information	18
Package Outline Dimensions	20
SOT353-5.....	20
SOT363-6.....	21
SOT23-5.....	22
SOT23-6.....	23
SOP8.....	24
MSOP8.....	25
TSSOP14.....	26
SOP14.....	27
Order Information	28
IMPORTANT NOTICE AND DISCLAIMER	29

Revision History

Date	Revision	Notes
2023-03-28	Rev.A.0	Initial version.
2024-02-15	Rev.A.1	Removed the "CMOS" in the description part. The physical object has not changed, just a correction of hand writing errors.

Pin Configuration and Functions

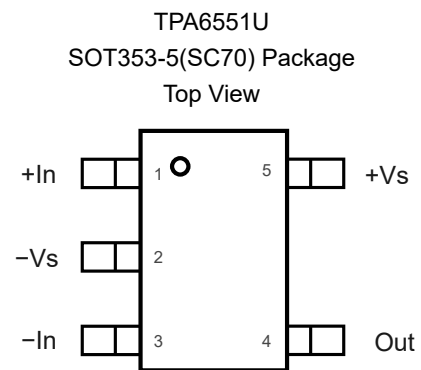
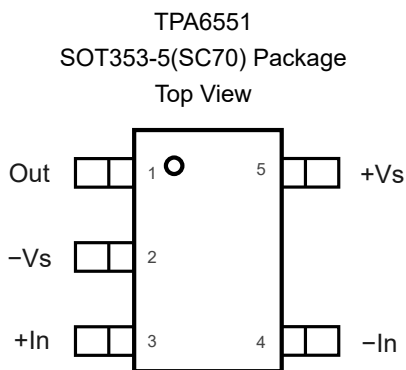
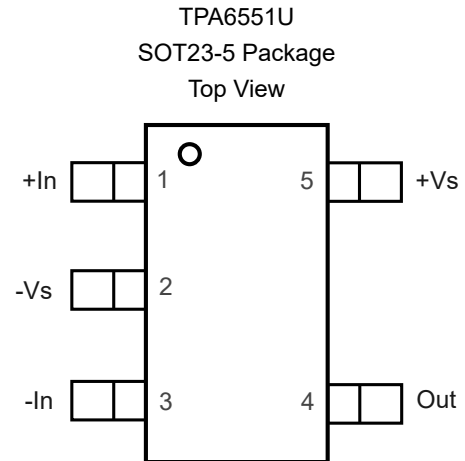
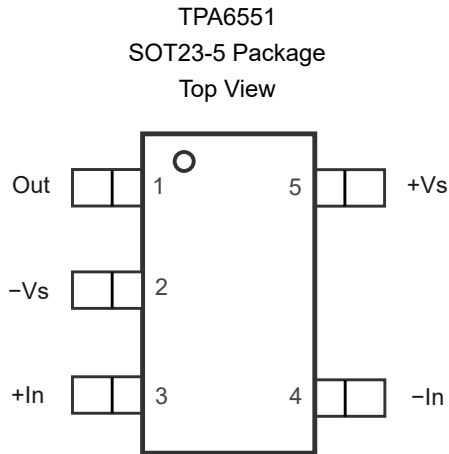
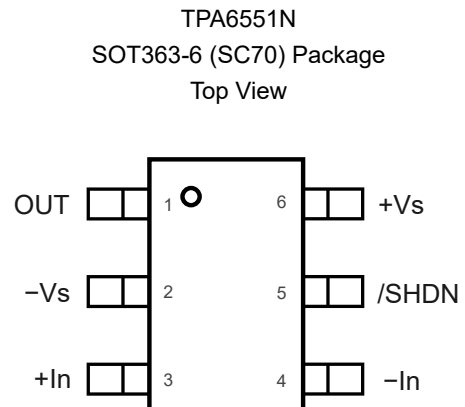
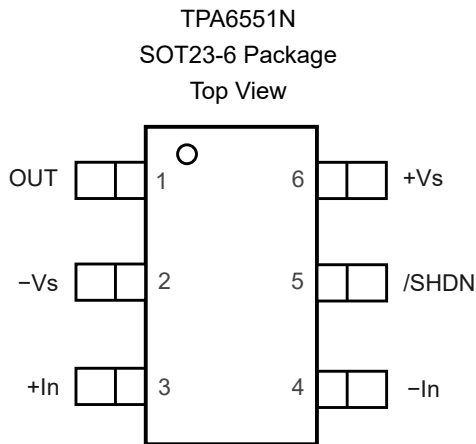



Table 1. Pin Functions: TPA6551, TPA6551U

Pin No.		Name	I/O	Description
TPA6551	TPA6551U			
1	4	Out	Output	Output
2	2	-Vs		Negative power supply
3	1	+In	Input	Noninverting input
4	3	-In	Input	Inverting input
5	5	+Vs		Positive power supply



Table 2. Pin Functions: TPA6551N

Pin No.	Name	I/O	Description
1	Out	Output	Output
2	-Vs		Negative power supply
3	+In	Input	Noninverting input
4	-In	Input	Inverting input
5	/SHDN	Input	Shut down input, the device is shut down when the low-level input voltage is on the input; the device is active when the high-level input voltage is on the input. The device is active in default with a 10-M Ω internal pull-up resistor.
6	+Vs		Positive power supply


TPA6552
SOP8 Package
Top View

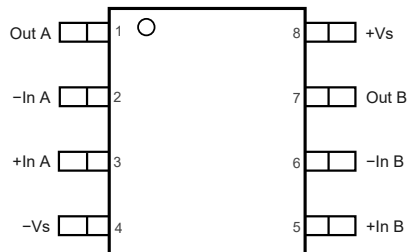

TPA6552
MSOP8 Package
Top View

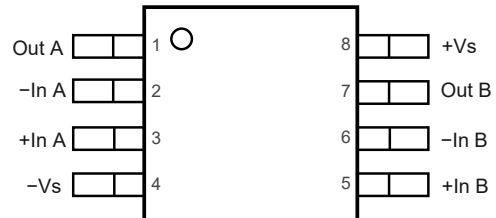

TPA6552
DFN2X2-8
Top View



TPA6552
TSSOP8
Top View

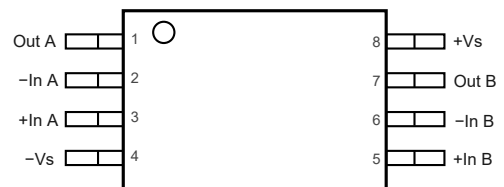


Table 3. Pin Functions: TPA6552

Pin No.	Name	I/O	Description
1	Out A	Output	Output
2	-In A	Input	Inverting input
3	+In A	Input	Noninverting input
4	-Vs		Negative power supply
5	+In B	Input	Noninverting input
6	-In B	Input	Inverting input
7	Out B	Output	Output
8	+Vs		Positive power supply

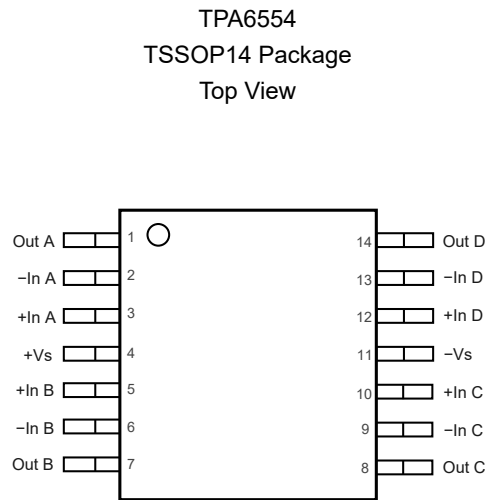
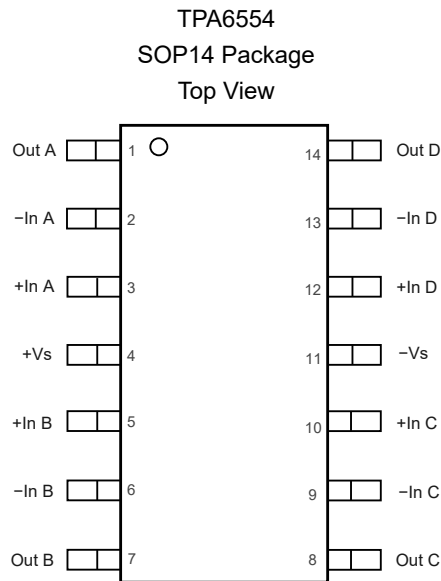


Table 4. Pin Functions: TPA6554

Pin No.	Name	I/O	Description
1	Out A	Output	Output
2	-In A	Input	Inverting input
3	+In A	Input	Noninverting input
4	+Vs		Positive power supply
5	+In B	Input	Noninverting input
6	-In B	Input	Inverting input
7	Out B	Output	Output power supply
8	Out C	Output	Output power supply
9	-In C	Input	Inverting input
10	+In C	Input	Noninverting input
11	-Vs		Negative power supply
12	+In D	Input	Noninverting input
13	-In D	Input	Inverting input
14	Out D	Output	Output

Specifications

Absolute Maximum Ratings ⁽¹⁾

Parameter		Min	Max	Unit
	Supply Voltage, (+V _S) – (–V _S)		6.5	V
	Input Voltage	(–V _S) – 0.3	(+V _S) + 0.3	V
	Differential Input Voltage	(–V _S) – (+V _S)	(+V _S) – (–V _S)	V
	Input Current: +I _N , –I _N ⁽²⁾	–10	+10	mA
	Output Voltage	(–V _S) – 0.3	(+V _S) + 0.3	V
	Output Short-Circuit Duration ⁽³⁾		Infinite	
T _J	Maximum Operating Junction Temperature		150	°C
T _A	Operating Temperature Range	–40	125	°C
T _{STG}	Storage Temperature Range	–65	150	°C
T _L	Lead Temperature (Soldering 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The inputs are protected by ESD protection diodes to each power supply. If the input extends more than 300 mV beyond the power supply, the input current should be limited to less than 10 mA.

(3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

ESD, Electrostatic Discharge Protection

Parameter		Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	2	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 ⁽²⁾	1	kV

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Recommended Operating Conditions

Parameter		Min	Typ	Max	Unit
V _S	Supply Voltage, (+V _S) – (–V _S)	2.5 or ± 1.25		5.5 or ± 2.25	V
T _A	Operating Temperature Range	–40		125	°C

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
SOT353-5 (SC70)	400	150	°C/W
SOT23-5	250	81	°C/W
SOT23-6	250	81	°C/W
SOP8	158	43	°C/W
MSOP8	210	45	°C/W
TSSOP8	191	44	°C/W
SOP14	120	36	°C/W
TSSOP14	180	35	°C/W

Electrical Characteristics

All test conditions: $V_S = 5\text{ V}$, $T_A = 25^\circ\text{C}$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$, unless otherwise noted.

Parameter	Conditions	T_A	Min	Typ	Max	Unit	
Power Supply							
V_S	Supply Voltage Range		2.5		5.5	V	
I_Q	Quiescent Current per Amplifier	$V_S = 2.5\text{ V to }5.5\text{ V}$, TPA6551	$-40^\circ\text{C to }125^\circ\text{C}$	0.9	1.2	mA	
		$V_S = 2.5\text{ V to }5.5\text{ V}$, TPA6552/ TPA6554	$-40^\circ\text{C to }125^\circ\text{C}$	0.8	1	mA	
PSRR	Power Supply Rejection Ratio	$V_S = 2.5\text{ V to }5.5\text{ V}$		88	110	dB	
			$-40^\circ\text{C to }125^\circ\text{C}$	83		dB	
Shutdown, TPA6551N only							
	Quiescent Current in Shutdown Mode			0.5	2	μA	
	Input Low Voltage	Shutdown			$0.15^* V_S$	V	
	Input High Voltage	Active		$0.85^* V_S$		V	
	Input Current		$-40^\circ\text{C to }125^\circ\text{C}$	0.5	2	μA	
	Turn on time			20		μs	
	Turn off time			2		μs	
Input Characteristics							
V_{OS}	Input Offset Voltage	$V_{CM} = 0\text{ V}, 2.5\text{ V}$		-1	0.15	1	mV
			$-40^\circ\text{C to }125^\circ\text{C}$	-2		2	mV
		$V_{CM} = 5\text{ V}$		-1.5	0.25	1.5	mV
			$-40^\circ\text{C to }125^\circ\text{C}$	-3		3	mV
V_{OSTC}	Input Offset Voltage Drift		$-40^\circ\text{C to }125^\circ\text{C}$	2		$\mu\text{V}/^\circ\text{C}$	
I_B	Input Bias Current	$V_{CM} = 2.5\text{ V}$		400		nA	
			$-40^\circ\text{C to }125^\circ\text{C}$	600		nA	
I_{OS}	Input Offset Current	$V_{CM} = 2.5\text{ V}$		10		nA	
			$-40^\circ\text{C to }125^\circ\text{C}$	20		nA	
C_{IN}	Input Capacitance	Differential Mode		2		pF	
		Common Mode		4		pF	
A_v	Open-loop Voltage Gain	$V_O = 0.5\text{ V to }4.5\text{ V}$		78	100	dB	
			$-40^\circ\text{C to }125^\circ\text{C}$	70		dB	
V_{CMR}	Common-mode Input Voltage Range		$-40^\circ\text{C to }125^\circ\text{C}$	$(-V_S)$	$(+V_S)$	V	

Parameter		Conditions	T _A	Min	Typ	Max	Unit
CMRR	Common Mode Rejection Ratio	V _{CM} = 0 V to 3.5 V		80	100		dB
			-40°C to 125°C	75			dB
		V _{CM} = 0 V to 5 V		70	90		dB
			-40°C to 125°C	65			dB
Output Characteristics							
	Output Voltage Swing from Positive Rail	V _S = 5.5 V, R _L = 10 kΩ to V _S /2			5	12	mV
			-40°C to 125°C			15	mV
		V _S = 5.5 V, R _L = 2 kΩ to V _S /2			25	35	mV
			-40°C to 125°C			40	mV
	Output Voltage Swing from Negative Rail	V _S = 5.5 V, R _L = 10 kΩ to V _S /2			3	12	mV
			-40°C to 125°C			15	mV
		V _S = 5.5 V, R _L = 2 kΩ to V _S /2			12	25	mV
			-40°C to 125°C			30	mV
I _{sc}	Output Short-Circuit Current	V _S = 5.5 V, Source		68	90		mA
			-40°C to 125°C	50			mA
		V _S = 5.5 V, Sink		98	120		mA
			-40°C to 125°C	75			mA
AC Specifications							
GBW	Gain-Bandwidth Product				10		MHz
SR	Slew Rate	G = 1, 2 V step			3		V/μs
t _{OR}	Overload Recovery				1.8		μs
t _S	Settling Time, 0.1%	G = 1, 2 V step			1		μs
PM	Phase Margin	R _L = 10 K, C _L = 100 pF			60		°
GM	Gain Margin	R _L = 10 K, C _L = 100 pF			15		dB
	Channel Separation	f = 100 kHz			100		dB
Noise Performance							
E _N	Input Voltage Noise	f = 0.1 Hz to 10 Hz, V _{CM} = 2.5 V			0.2		μV _{RMS}
e _N	Input Voltage Noise Density	f = 10 Hz, V _{CM} = 2.5 V			20		nV/√Hz
		f = 1 kHz, V _{CM} = 2.5 V			10		nV/√Hz
i _N	Input Current Noise	f = 1 kHz			500		fA/√Hz
THD+N	Total Harmonic Distortion and Noise	f = 1 kHz, G = 1, R _L = 10 k, V _{OUT} = 1 V _{pp}			0.007		%

Typical Performance Characteristics

All test conditions: $V_S = 5\text{ V}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.

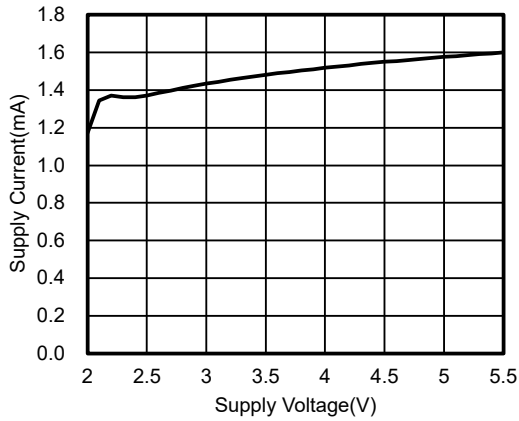


Figure 1. Supply Current vs Supply Voltage, 2ch

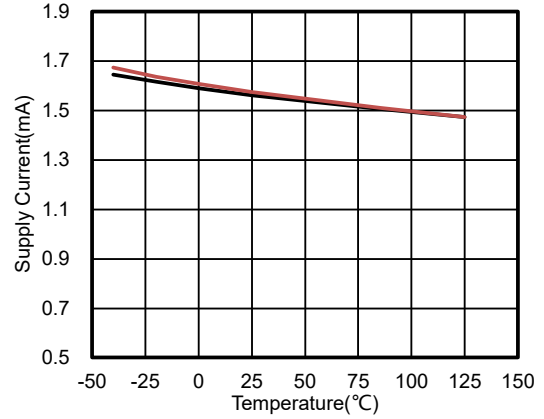


Figure 2. Supply Current vs Temperature, 2ch, 2pcs

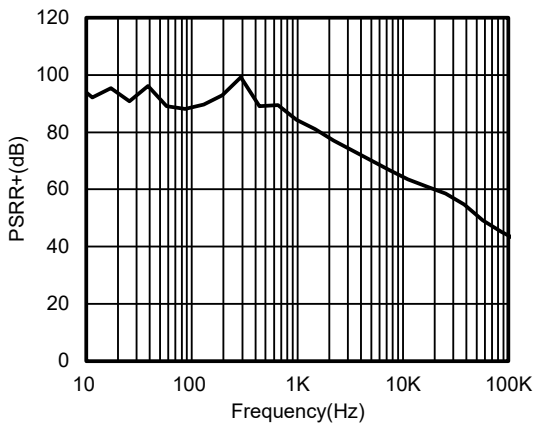


Figure 3. PSRR+ vs Frequency

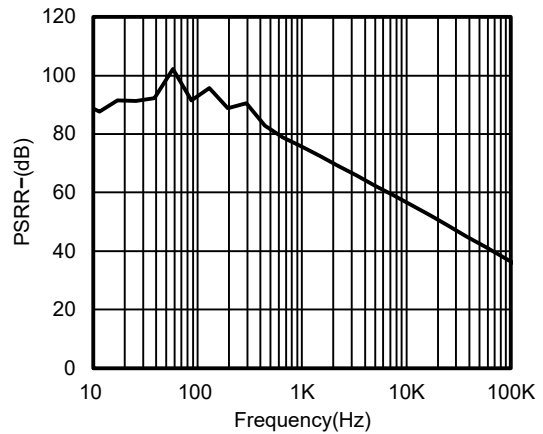


Figure 4. PSRR- vs Frequency

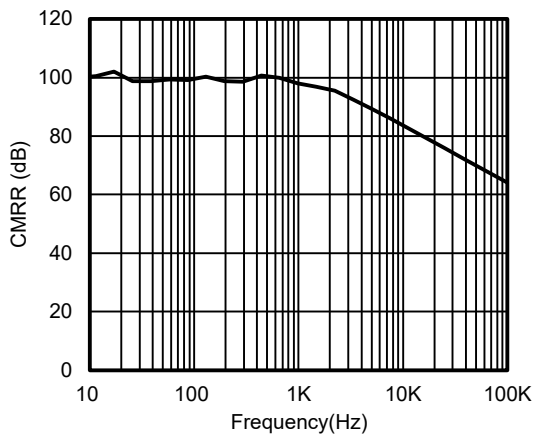


Figure 5. CMRR vs Frequency

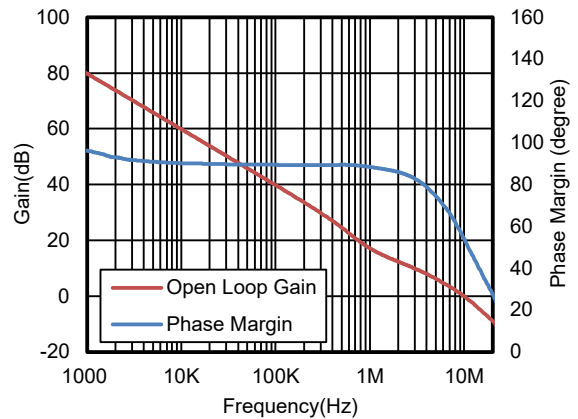


Figure 6. Open Loop Gain and Phase Margin vs Frequency, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$

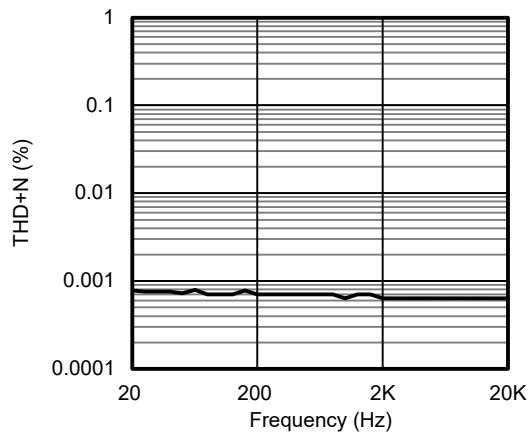


Figure 7. THD vs Frequency, $G = 1$, $V_{IN} = 1 V_{RMS}$

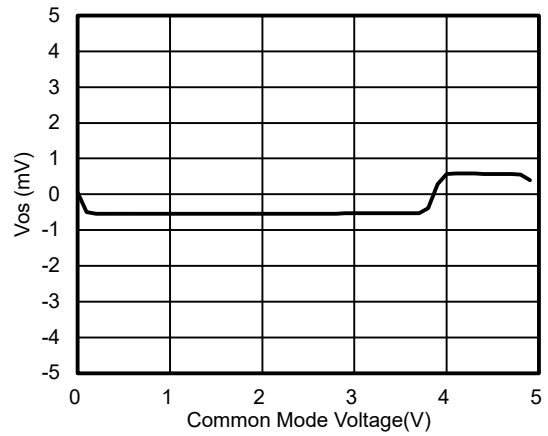


Figure 8. V_{OS} vs V_{CM} , $V_s = 5.5 V$

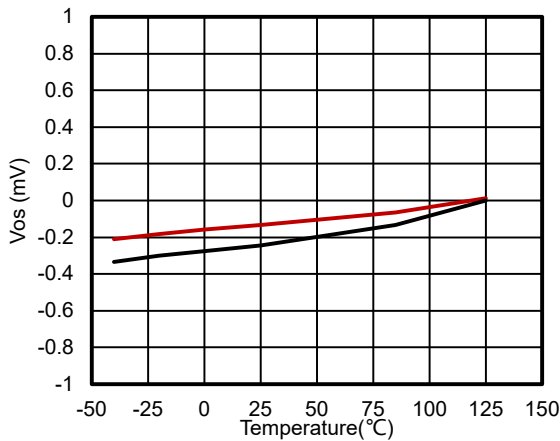


Figure 9. V_{OS} vs Temperature, 2 pcs

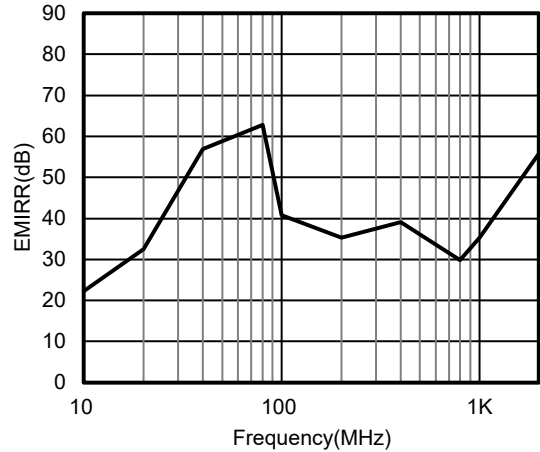


Figure 10. EMIRR vs Frequency

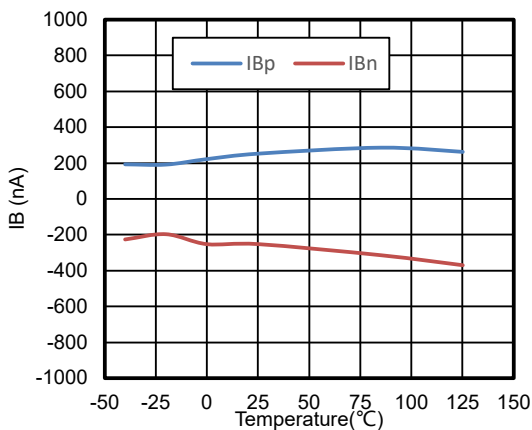


Figure 11. I_B vs Temperature

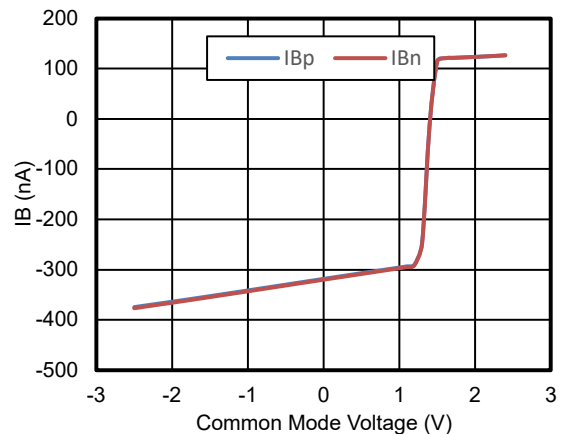


Figure 12. I_B vs Common Voltage, ($-V_s = -2.5 V$, $+V_s = 2.5 V$)

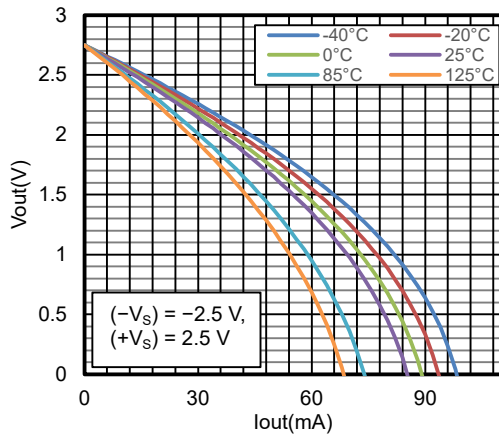


Figure 13. Output Voltage vs Output Current, $(-V_S) = -2.5$ V, $(+V_S) = 2.5$ V

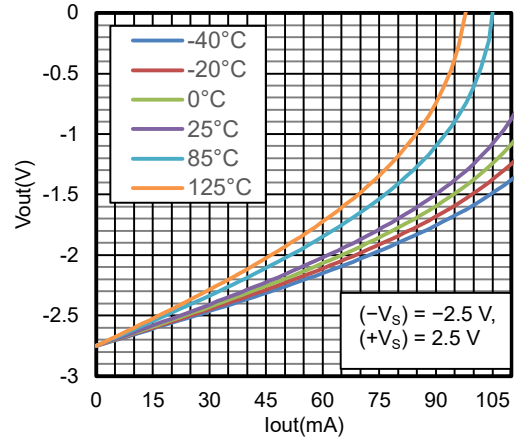


Figure 14. Output Voltage vs Output Current, $(-V_S) = -2.5$ V, $(+V_S) = 2.5$ V

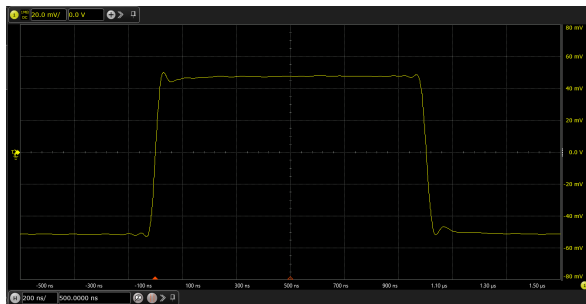


Figure 15. 100-mV Small Signal Step Response

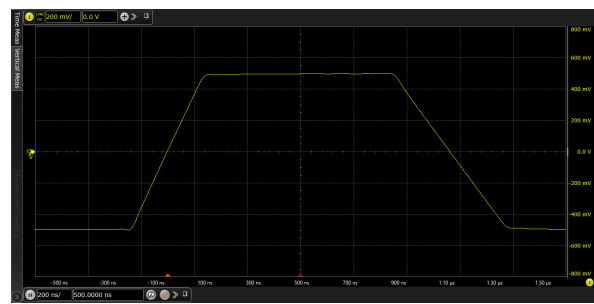


Figure 16. 1-V Large Signal Step Response

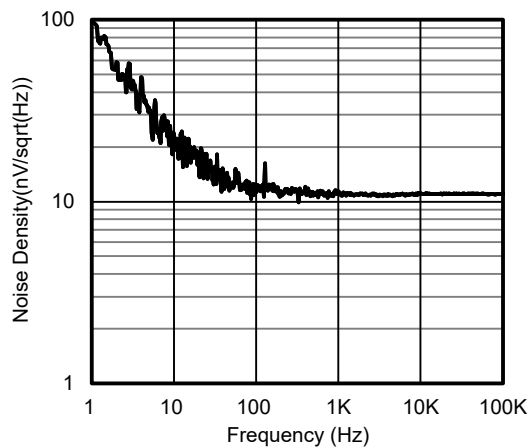


Figure 17. Voltage Noise Spectral Density vs Frequency, $V_S = 5$ V

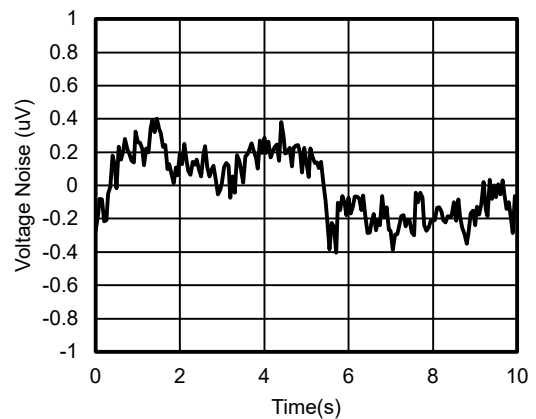


Figure 18. 0.1-Hz to 10-Hz Voltage Noise, $V_S = 5$ V

Detailed Description

Overview

The TPA655x series op amps can operate on a single-supply voltage (2.5 V to 5.5 V), or a split-supply voltage (± 1.25 V to ± 2.75 V), making them highly versatile and easy to use. The power-supply pins should have local bypass ceramic capacitors (typically 0.01 μ F to 0.1 μ F). These amplifiers are fully specified from 2.5 V to 5.5 V and over the extended temperature range of -40°C to $+125^{\circ}\text{C}$. Parameters that can exhibit variance with regard to operating voltage or temperature are presented in the [Typical Performance Characteristics](#).

Functional Block Diagram

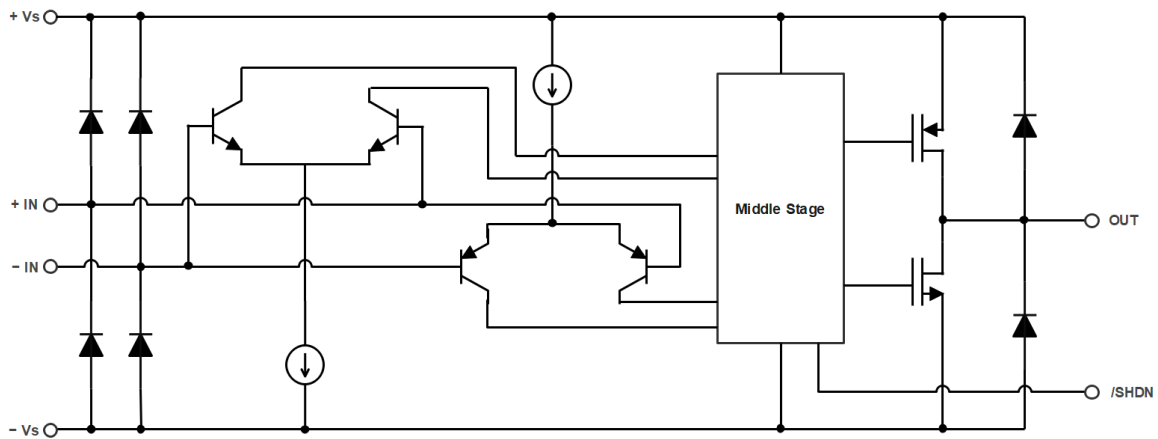


Figure 19. Functional Block Diagram

Feature Description

Operating Voltage

The TPA655x family of op amplifiers is designed for single supply operation from 2.5 V to 5.5 V or dual supply operation from ± 1.25 V to ± 2.75 V.

Rail-to-Rail Input

The input common-mode voltage range of the TPA655x family extends 100 mV beyond the supply rails. This performance is achieved with a complementary input stage: a PNP input differential pair in parallel with an NPN input differential pair. The PNP pair is active for inputs from 100 mV below the negative supply to approximately $(+V_S) - 1.5$ V, whereas the NPN pair is active for input voltages close to the positive rail, typically $(+V_S) - 1.5$ V to 100 mV above the positive supply. There is around 200 mV transition region at $(+V_S) - 1.5$ V where both pairs are on. Within this transition region, PSRR, CMRR, offset voltage, offset drift, and THD can degrade compared to that operating outside this region.

Rail-to-Rail Output

The TPA655x family delivers rail-to-rail output swing capability with a class-AB output stage. Different load conditions change the ability of the amplifier to swing close to the rails.

Shutdown Function

The shutdown function of the TPA655x is only available in the TPA655xN series. The voltage level of this is referenced to the supply voltage of the operational amplifier. The operational amplifier is enabled with a valid high voltage and shutdown by a valid low voltage. When the single supply is used, a valid high level is defined as $0.85 \times (+V_s)$ of the positive supply and a valid low level is defined as $0.15 \times (+V_s)$ of the positive supply. For example, with $+V_s$ at 5 V and $-V_s$ at 0 V, a valid high level is defined as 4.25 V and a valid low level is defined as 0.75 V. If dual or split power supplies are used, make sure the valid high or valid low input signals are properly referred to the positive supply voltage. For example, with $+V_s$ at 2.5V and $-V_s$ at -2.5V, a valid high level is defined as 1.75 V and a valid low level is defined as -1.75 V. The pin of SHDN is internally pulled up to a valid high level when this pin is left open state, so the amplifier is enabled initially if nothing is connected to the shutdown pin. The output state of the amplifier is assumed as high-impedance state if shut down. The output state of the amplifier is assumed as high-impedance state if shut down.

Low 1/f Input Voltage Noise

The TPA655x family uses bipolar transistor as input pair which brings very low 1/f voltage noise, the 1/f corner frequency of the device is lower than 100 Hz. The input voltage noise at 0.1 to 10 Hz is $1 \mu V_{PP}$, so the device is very suitable for applications that need low noise within the low-frequency range.

Application and Implementation


Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Application Information

Low Side Current Sensing Application

Figure 20 shows the TPA655x configured in a low-side current sensing application. The low-side current sensing method consists of placing a sense resistor between the load and the circuit ground. The voltage dropping across the resistor is amplified by different amplifier circuits with the TPA655x. The V_{REF} can be used to add bias voltage to output voltage. Particular attention must be paid to the matching and precision of R1, R2, R3, and R4, to maximize the accuracy of the measurement.

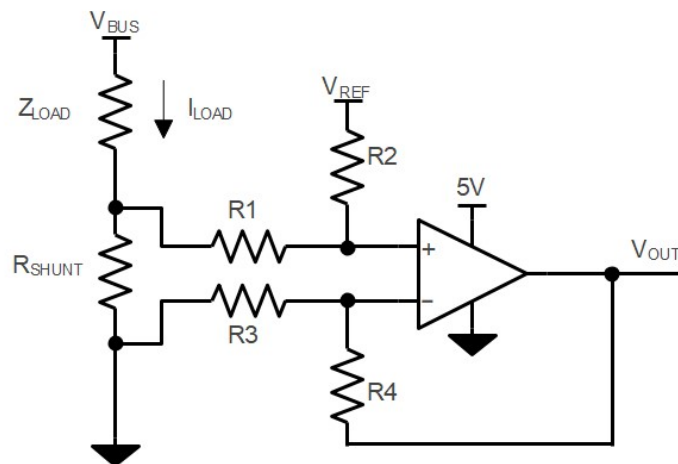

$$V_{OUT} = (I_{LOAD} \times R_{SHUNT}) \times (R2 / R1) + V_{REF}$$



$$\text{When } R3 = R1, R2 = R4, R_{SHUNT} \ll R1$$

Figure 20. Dual Supply Operation Connections

Power Supply Recommendations

Place 0.1- μ F bypass capacitors close to the power supply pins for reducing coupling errors from the noisy or high-impedance power supplies.

Tape and Reel Information

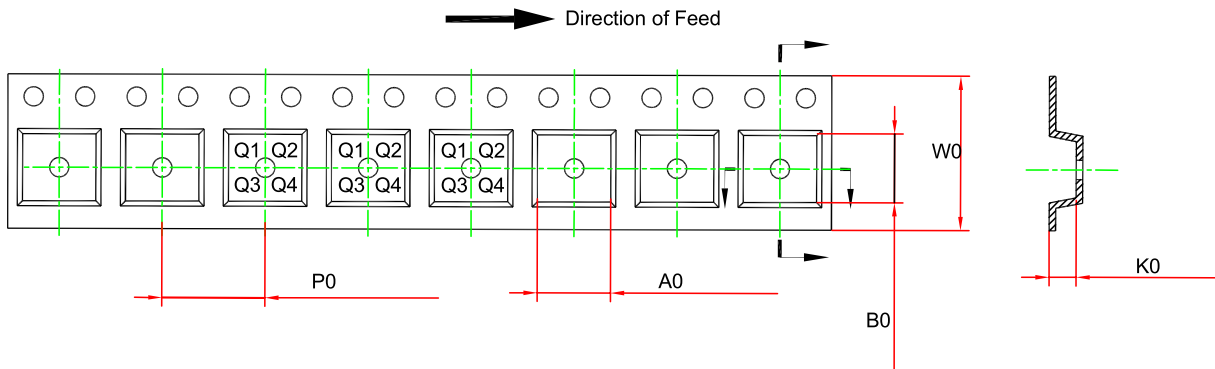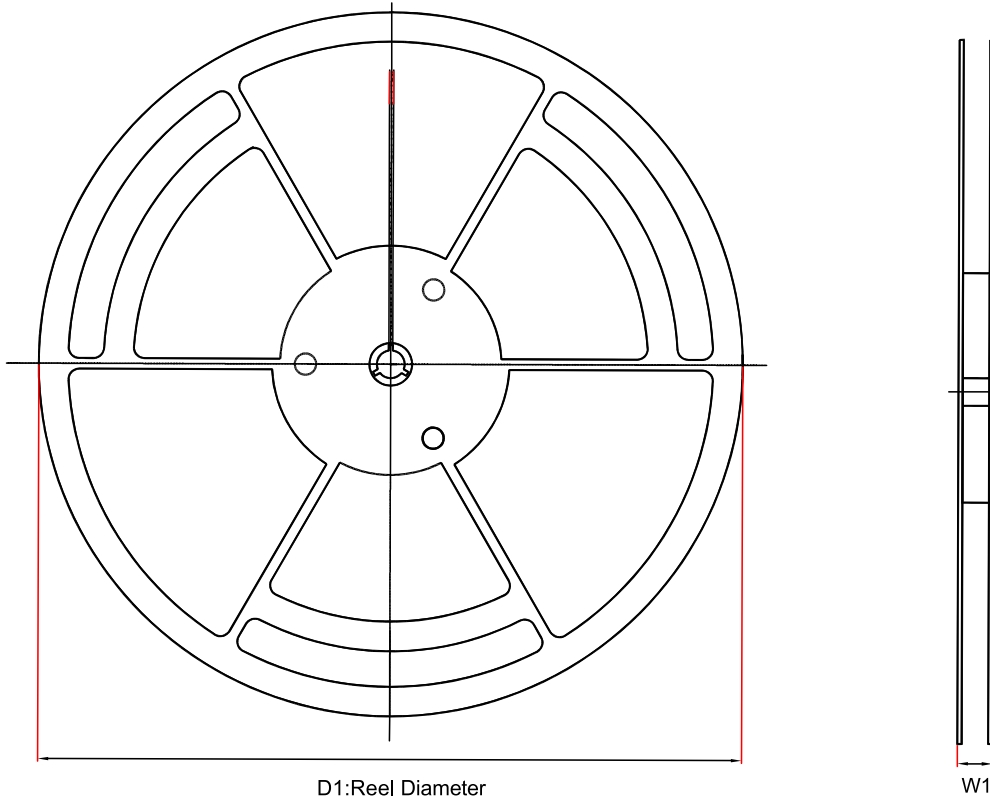


Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPA6551-SC5R	SOT353-5 (SC70)	178.0	12.1	2.4	2.5	1.2	4.0	8.0	Q3
TPA6551-S5TR	SOT23-5	179.0	13.1	3.2	3.2	1.4	4.0	8.0	Q3
TPA6551U-S5TR	SOT23-5	179.0	13.1	3.2	3.2	1.4	4.0	8.0	Q3
TPA6551N-S6TR	SOT23-6	178.0	13.1	3.2	3.2	1.4	4.0	8.0	Q3
TPA6552-SO1R	SOP8	330.0	17.6	6.5	5.4	2.0	8.0	12.0	Q1

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPA6552-VS1R	MSOP8	330.0	17.6	5.2	3.3	1.5	8.0	12.0	Q1
TPA6554-SO2R	SOP14	330.0	21.6	6.5	9.0	2.1	8.0	16.0	Q1
TPA6554-TS2R	TSSOP14	330.0	17.6	6.8	5.4	1.4	8.0	12.0	Q1

Package Outline Dimensions





SOT353-5

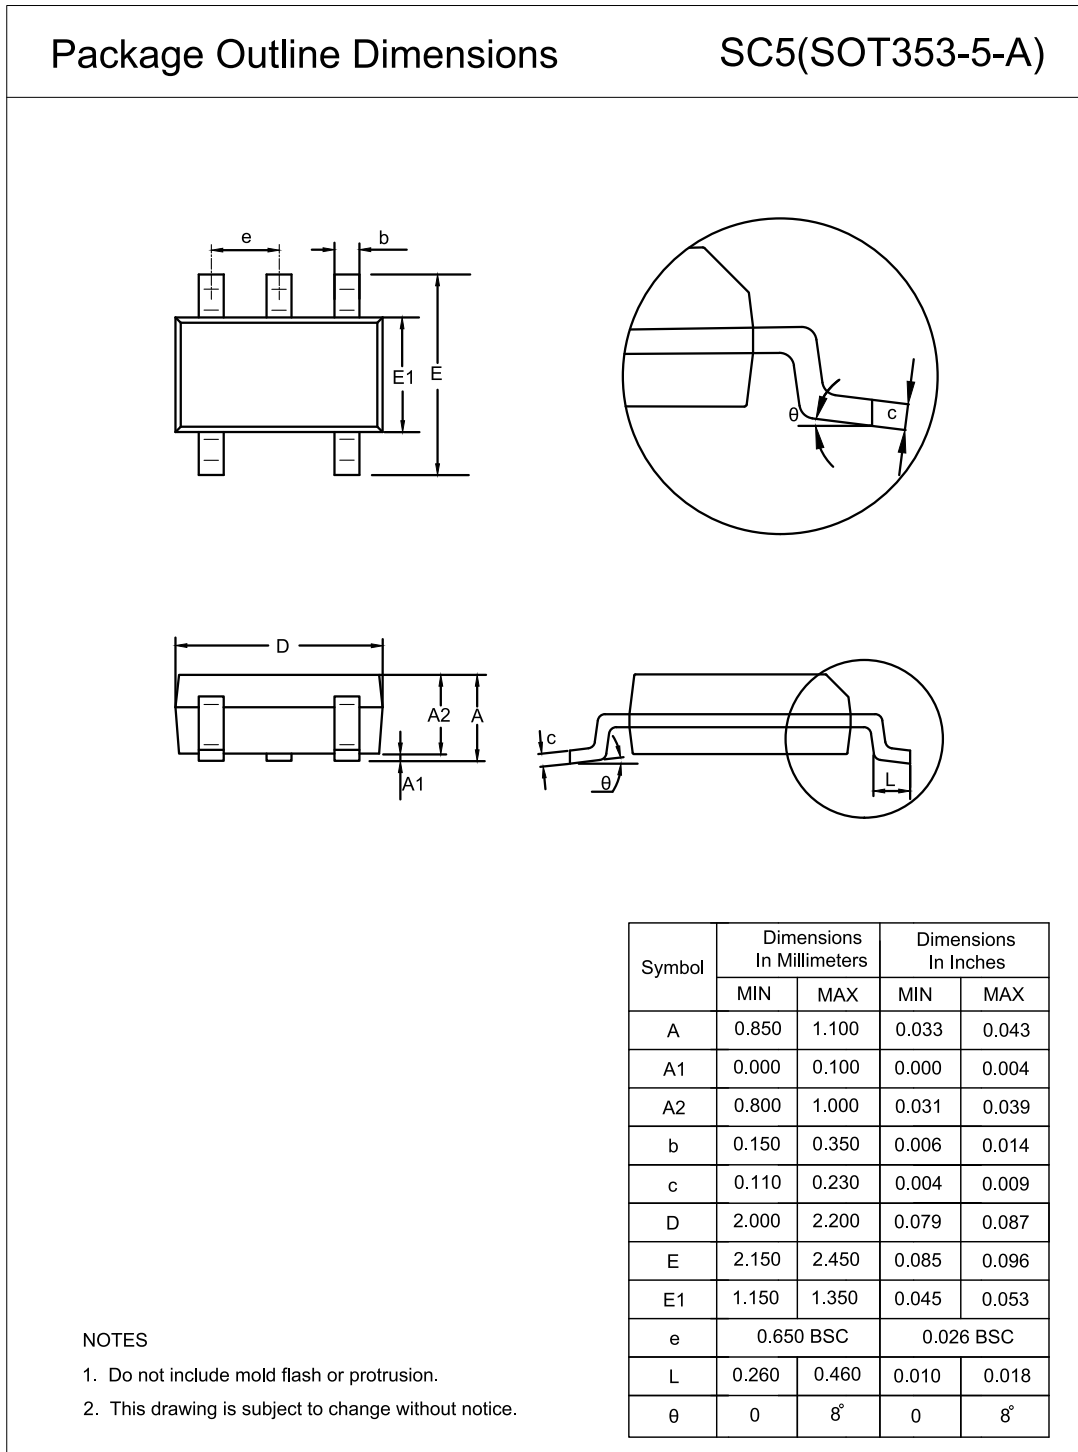

SOT363-6

Package Outline Dimensions





SC6(SOT363-6-A)

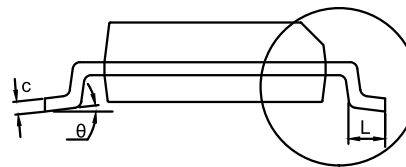

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.850	1.100	0.033	0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	1.000	0.031	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.230	0.003	0.009
D	2.000	2.200	0.079	0.087
E	2.150	2.450	0.085	0.096
E1	1.150	1.350	0.045	0.053
e	0.650 BSC		0.026 BSC	
L	0.260	0.460	0.010	0.018
θ	0	8°	0	8°

NOTES


1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

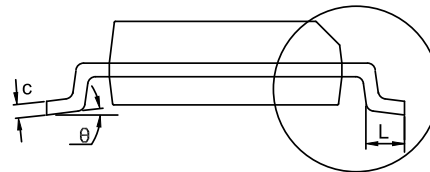SOT23-5
Package Outline Dimensions
S5T(SOT23-5-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.150	0.000	0.006
A2	1.000	1.200	0.039	0.047
b	0.280	0.500	0.011	0.020
c	0.100	0.230	0.004	0.009
D	2.820	3.020	0.111	0.119
E	2.600	3.000	0.102	0.118
E1	1.500	1.720	0.059	0.068
e	0.950 BSC		0.037 BSC	
L	0.300	0.600	0.012	0.024
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

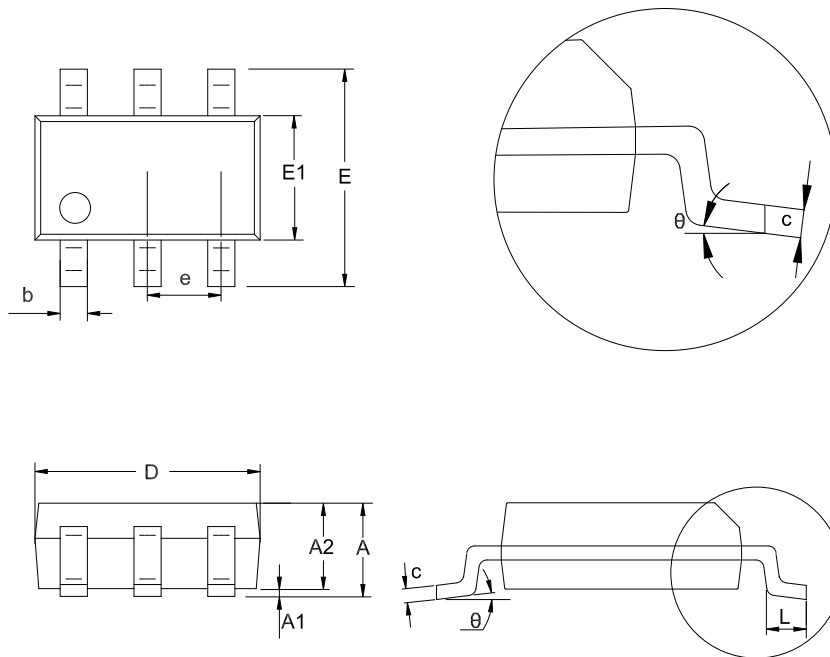SOT23-6
Package Outline Dimensions
S6T(SOT23-6-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.150	0.000	0.006
A2	1.000	1.200	0.039	0.047
b	0.280	0.500	0.011	0.020
c	0.100	0.230	0.004	0.009
D	2.820	3.020	0.111	0.119
E	2.600	3.000	0.102	0.118
E1	1.500	1.720	0.059	0.068
e	0.950 BSC		0.037 BSC	
L	0.300	0.600	0.012	0.024
θ	0	8°	0	8°


NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

SOP8

Package Outline Dimensions





SO1(SOP-8-A)

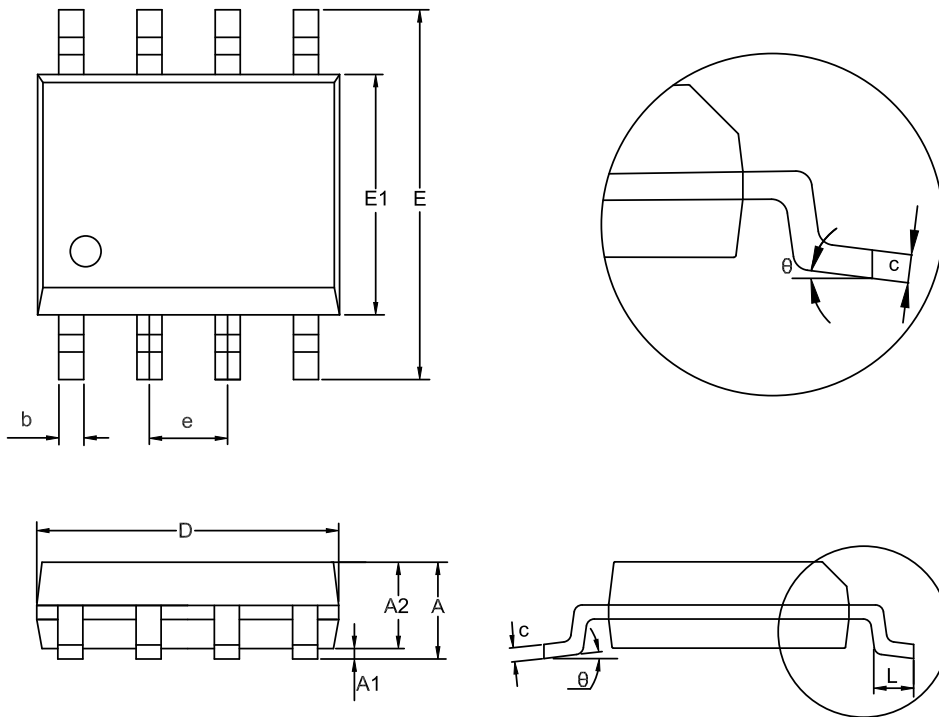

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.550	0.049	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.000	0.016	0.039
theta	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

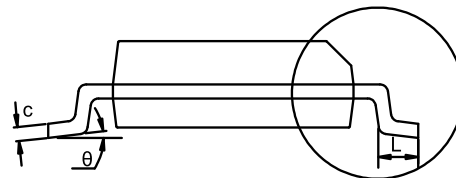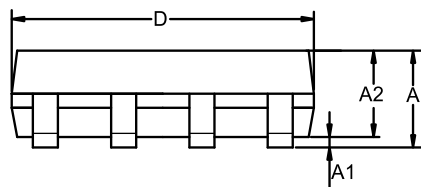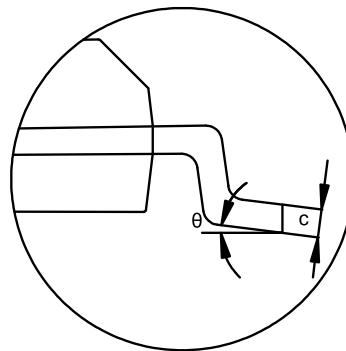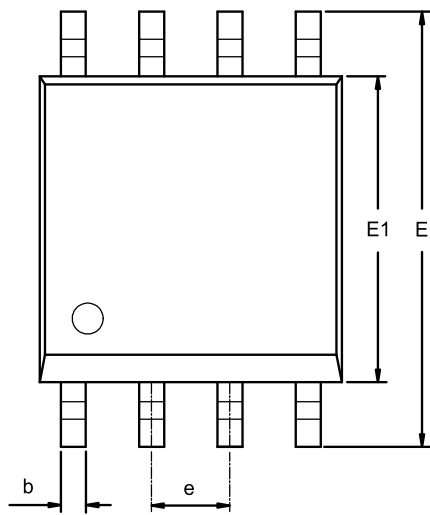MSOP8
Package Outline Dimensions
VS1(MSOP-8-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.800	1.100	0.031	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	4.700	5.100	0.185	0.201
E1	2.900	3.100	0.114	0.122
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0	8°	0	8°




NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

TSSOP14

Package Outline Dimensions


TS2(TSSOP-14-A)

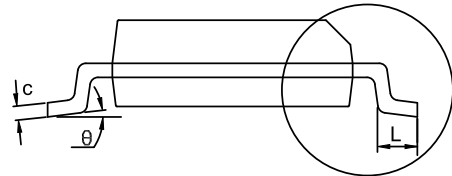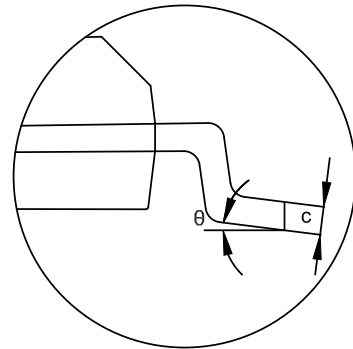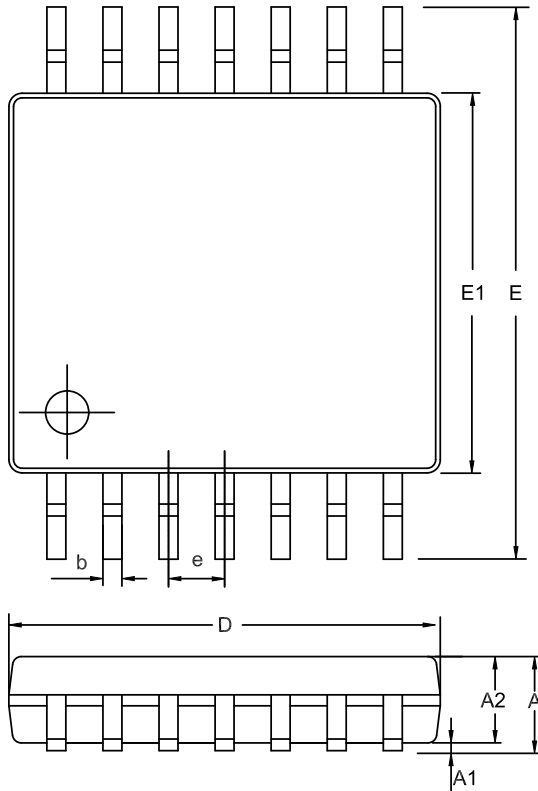

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.900	1.200	0.035	0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	4.900	5.100	0.193	0.201
E	6.200	6.600	0.244	0.260
E1	4.300	4.500	0.169	0.177
e	0.650 BSC		0.026 BSC	
L	0.450	0.750	0.018	0.030
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

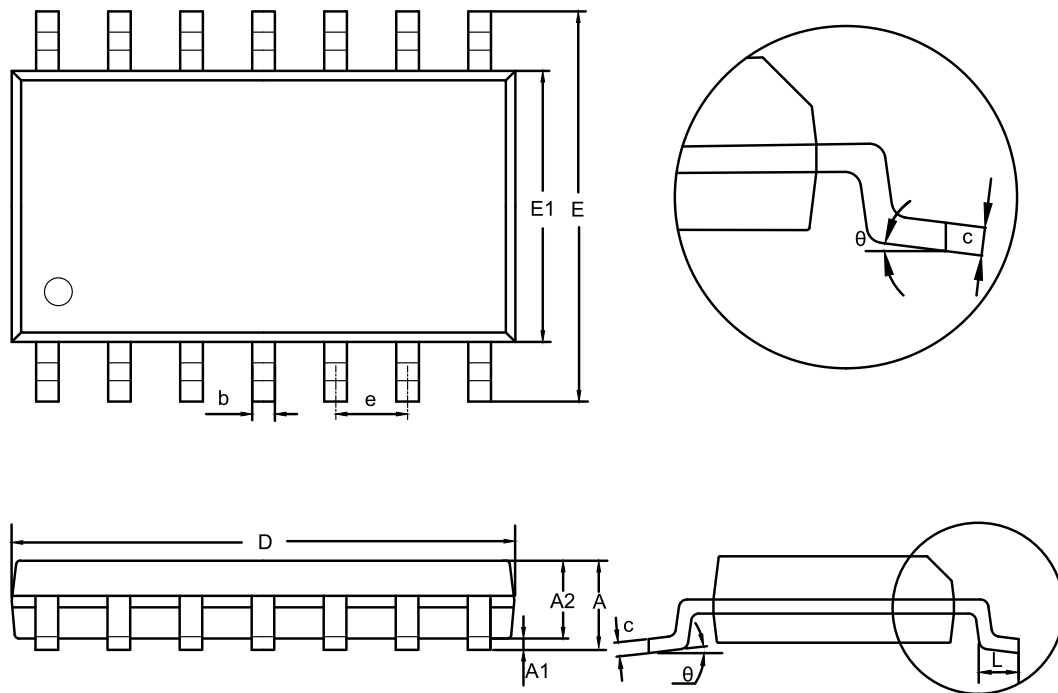SOP14
Package Outline Dimensions
SO2(SOP-14-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.650	0.049	0.065
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	8.450	8.850	0.333	0.348
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
theta	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPA6551U-SC5R	-40 to 125°C	SOT353 (SC70-5)	65U	3	Tape and Reel, 3000	Green
TPA6551-S5TR	-40 to 125°C	SOT23-5	655	3	Tape and Reel, 3000	Green
TPA6551U-S5TR	-40 to 125°C	SOT23-5	65U	3	Tape and Reel, 3000	Green
TPA6551N-S6TR	-40 to 125°C	SOT23-6	65N	3	Tape and Reel, 3000	Green
TPA6552-SO1R	-40 to 125°C	SOP8	A6552	3	Tape and Reel, 4000	Green
TPA6552-VS1R	-40 to 125°C	MSOP8	A6552	3	Tape and Reel, 3000	Green
TPA6554-SO2R	-40 to 125°C	SOP14	A6554	3	Tape and Reel, 2500	Green
TPA6554-TS2R	-40 to 125°C	TSSOP14	A6554	3	Tape and Reel, 3000	Green

(1) For future products, contact the 3PEAK factory for more information and samples.

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2023. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.

This page intentionally left blank