



Features

- ESD / transient protection of high speed data lines
 - IEC 61000-4-2 (ESD): ± 30 kV (air), ± 30 kV (contact)
- Working voltage: $V_{RWM} = 24V$
- Low reverse clamping voltage
- Ultra low leakage current
- Due to the integrated diode structure only one small package is needed to protect two CAN bus lines
- RoHS compliant with Halogen-free
- Qualified to AEC-Q101 Standards

HF



SOT-23

Typical Applications

- Automotive applications
- CAN bus protection

Mechanical Data

- Case: SOT-23
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
TPESD1CAN	SOT-23	3000 pcs / Tape & Reel	AN

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
IEC 61000-4-2; ESD (Air)	V_{ESD-A}	± 30	kV
IEC 61000-4-2; ESD (Contact)	V_{ESD-C}	± 30	kV
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PP}	220	W
Peak Pulse Current ($t_p = 8/20\mu\text{s}$)	I_{PP}	5	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-to-Air *1	$R_{\theta JA}$	300	°C/W
Thermal Resistance Junction-to-Case *1	$R_{\theta JC}$	185	°C/W
Thermal Resistance Junction-to-Lead *1	$R_{\theta JL}$	230	°C/W
Junction Temperature	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

Note 1: The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Stand-off Voltage	V_{RWM}		-	-	24	V
Reverse Breakdown Voltage	$V_{(BR)}$	$I_T = 1\text{mA}$	25.4	-	30.3	V
Reverse Leakage Current	I_R	$V_{RWM} = 24\text{V}$	-	-	0.05	μA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}, t_p = 8/20\mu\text{s}$	-	33	40	V
		$I_{PP} = 3\text{A}, t_p = 8/20\mu\text{s}$	-	39	42	V
		$I_{PP} = 5\text{A}, t_p = 8/20\mu\text{s}$		44	47	V
Junction Capacitance	C_J	$V_R = 0\text{V}, f = 1\text{MHZ}$	-	14	17	pF

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

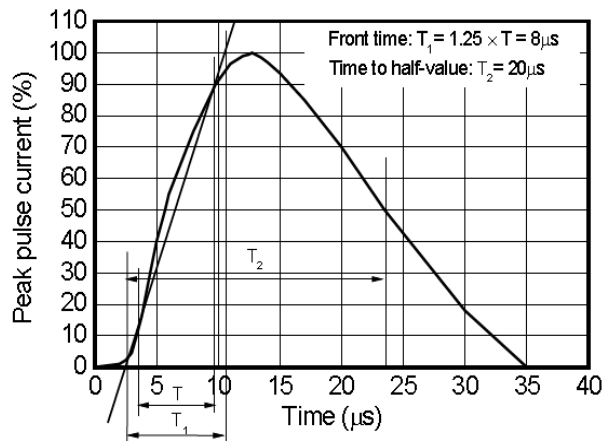


Fig 1 8/20 μs waveform per IEC61000-4-5

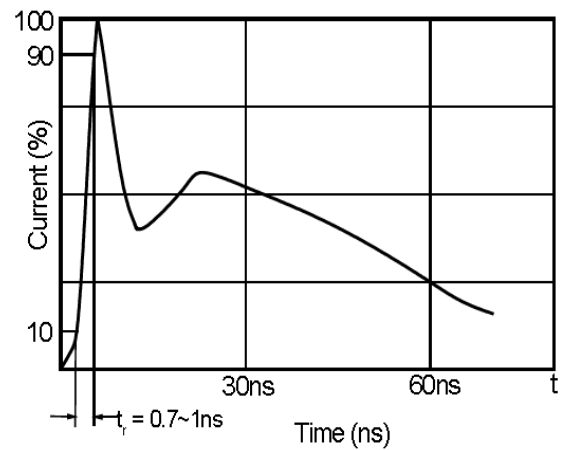


Fig 2 ESD pulse waveform according to IEC61000-4-2

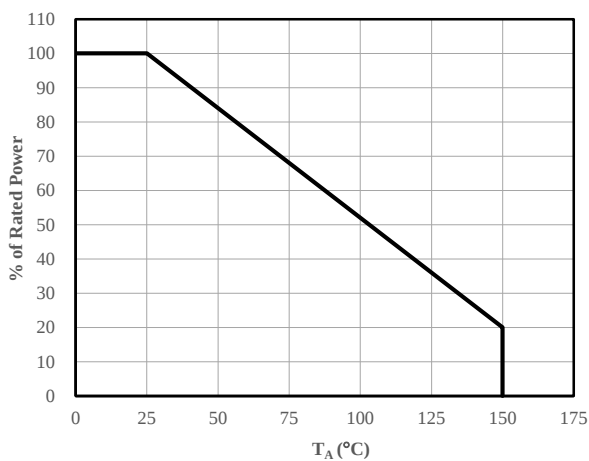


Fig 3 Power Derating Curve

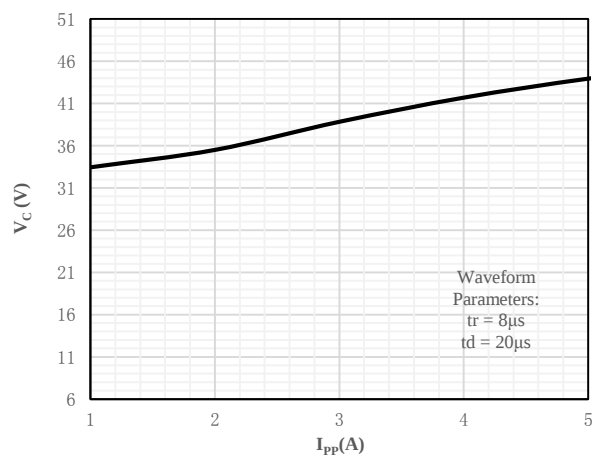


Fig 4 Clamping Voltage vs. Peak Pulse Current


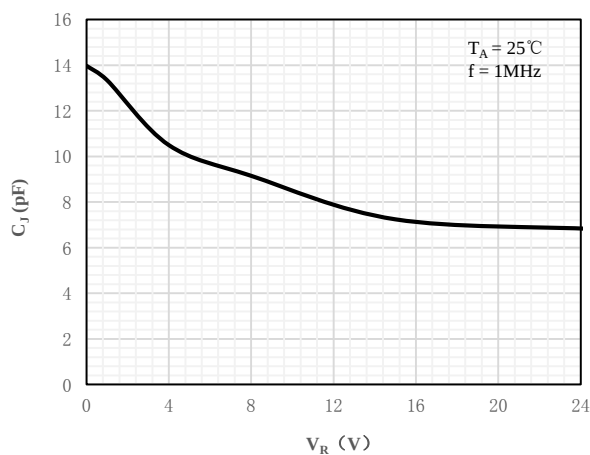


Fig 5 Junction Capacitance vs. Reverse Voltage

Package Outline Dimensions (Unit: mm)



Package Outline Dimensions (Unit: mm)

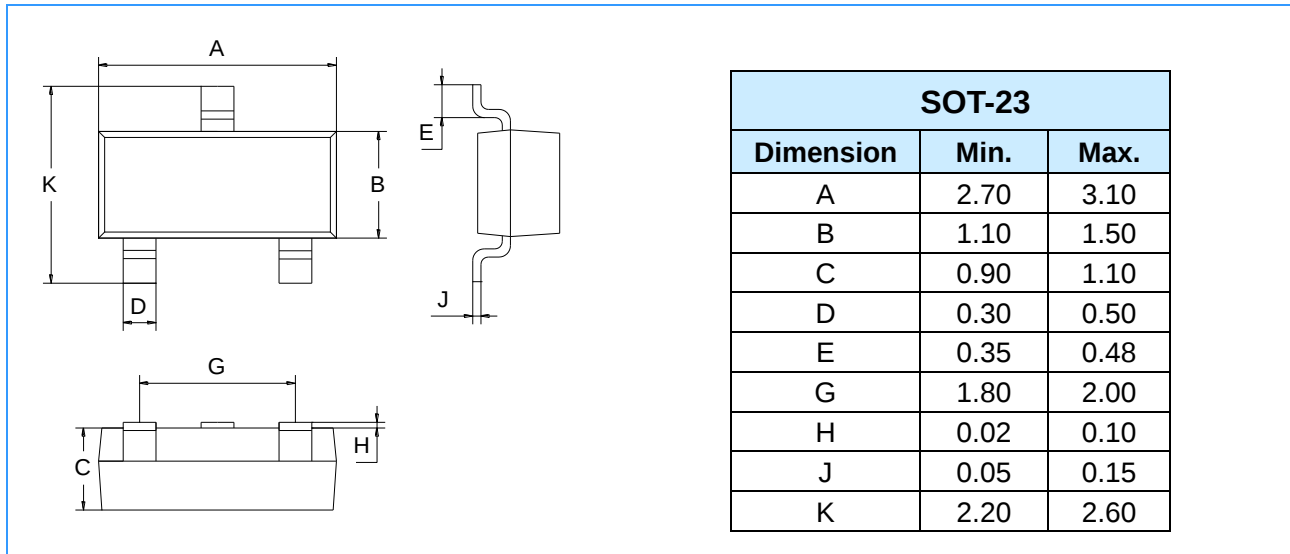