


Current Sense Transformers

TR- SERIES, FOR 50/60 and 400 Hz APPLICATIONS

- Low Cost.
- 5 standard turns ratios.
- Vertical PCB Mounting.
- Minimum material thickness from hole I.D to coil is 0.80mm.
- Molded construction with through-hole for primary lead.

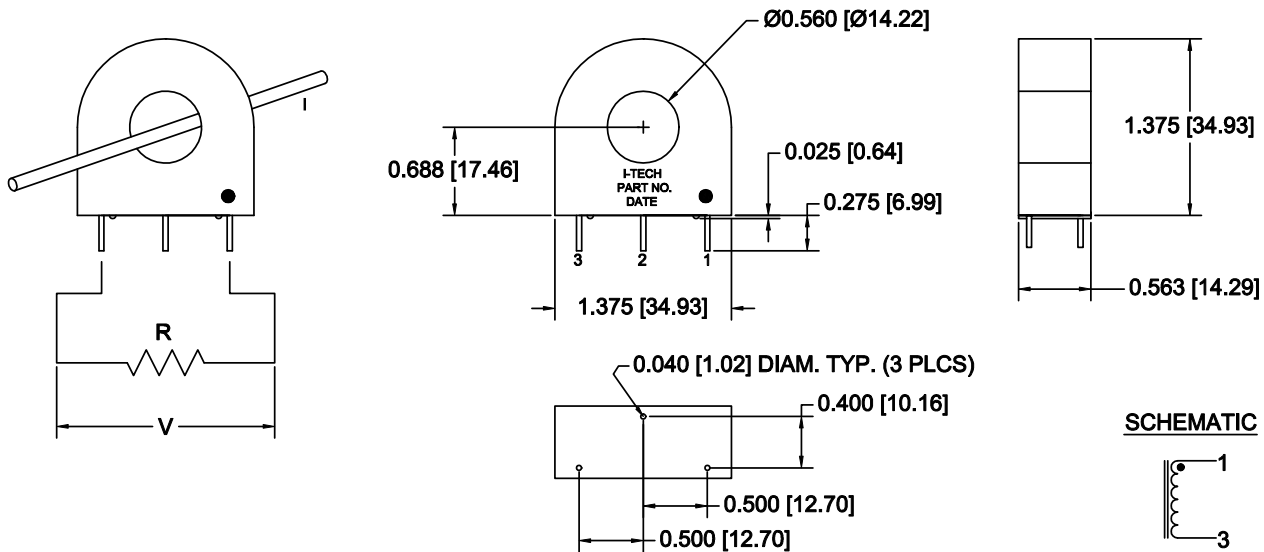

MODEL NUMBER	SECONDARY TURNS	MAXIMUM PRIMARY CURRENT AMPS (RMS)
TR-3025-PC	300	100
TR-5025-PC	500	100
TR-10025-PC	1000	100
TR-20025-PC	2000	100
TR-30025-PC	3000	100