

RF AMPLIFIER

MODEL TR9721

Available as: TR9721, 4 Pin TO-8B (T8)
RN9721, 4 Pin Surface Mount (SM19)
BR9721, SMA Connectorized Housing (H2)

Features

- Ultra Low Noise Figure: 0.8 dB Typical
- High Output Power: +22 dBm Typical
- Operating Temp. 0 °C to +70 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = 0 °C to +70 °C
Frequency	200-500 MHz	200 - 500 MHz
Gain (dB)	+34	32 Min.
Power @ 1 dB Comp. (dBm)	+22	+20 Min.
Reverse Isolation (dB)	-45	-40 Max.
VSWR In	2.3:1	2.5:1 Max.
Out	1.5:1	2.0:1 Max.
Noise Figure (dB)	0.8	1.3 Max.
Power Vdc	+15	+15
mA	105	110 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +48 dBm (Typ.)
Second Order Two Tone Intercept Point +43 dBm (Typ.)
Third Order Two Tone Intercept Point +33 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 85 °C
Storage Temperature -62°C to + 125 °C
Case Temperature + 85 °C
DC Voltage + 18 Volts
Continuous RF Input Power 0 dBm
Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

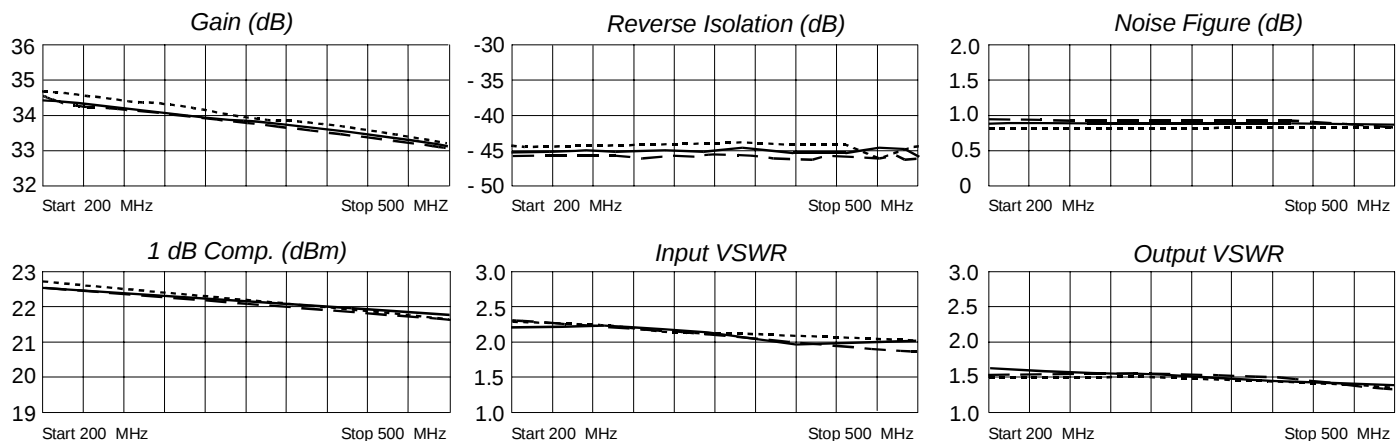

Legend ——— + 25 °C --- + 70 °C 0 °C

Linear S-Parameters

FREQ. MHz	Mag	S11- Deg	Mag	S21- Deg	Mag	S12- Deg	Mag	S22- Deg
200	.41	-32	54.19	-40	.0030	51	.21	169
250	.39	-42	53.46	-57	.0034	0	.20	155
300	.38	-52	52.09	-74	.0025	37	.20	144
350	.36	-61	50.75	-90	.0033	3	.18	134
400	.35	-70	49.24	-105	.0038	-9	.17	125
450	.34	-78	47.44	-120	.0044	-9	.16	114
500	.33	-86	45.49	-134	.0032	-2	.14	103



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 8/11/05

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001