

- I/O isolation 5000 VAC (reinforced)
- Wide 1.5:1 input voltage range
- Operating temperature range -40 to +80 °C without derating
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2xMOPP and IEC/EN/UL 62368-1
- Short circuit protection
- Regulated outputs
- Low leakage current < 2 µA
- Efficiency up to 84 %
- Operation up to 5000 m altitude
- 5-year product warranty



ES 60601-1 IEC 60601-1
UL 62368-1 IEC 62368-1

The TRV 2M is a series of 2 Watt DC/DC converters in a compact SIP-9 package with reinforced isolation of 5000 VAC for medical and industrial applications. The series offers a 1.5:1 input voltage range with a nominal input ranging between 5 and 24 VDC. With a continuous short circuit protection and a low leakage current of less than 2 µA, this converter is especially suited to protect any connected interfaces or applied parts to patients. Featuring almost fully regulated outputs this series provides great level of regulation without affecting the cost efficiency. It is an ideal solution for applications where an unregulated DC/DC converter would not meet your regulation requirements but cost still is a critical factor. With an operating temperature range from -40 to +80°C without derating and certifications acc. IEC/EN/ES 60601-1 3rd ed. for 2xMOPP and IEC/EN/UL 62368-1 this series is suitable for many different applications where a medical isolation system and short circuit protection is needed.

Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TRV 2-0510M	4.5 - 7 VDC (5 VDC nom.)	3.3 VDC	600 mA			78 %
TRV 2-0511M		5 VDC	400 mA			81 %
TRV 2-0512M		12 VDC	167 mA			83 %
TRV 2-0513M		15 VDC	134 mA			83 %
TRV 2-0521M		+5 VDC	200 mA	-5 VDC	200 mA	82 %
TRV 2-0522M		+12 VDC	83 mA	-12 VDC	83 mA	83 %
TRV 2-0523M		+15 VDC	67 mA	-15 VDC	67 mA	81 %
TRV 2-1210M	9.6 - 14.4 VDC (12 VDC nom.)	3.3 VDC	600 mA			79 %
TRV 2-1211M		5 VDC	400 mA			81 %
TRV 2-1212M		12 VDC	167 mA			84 %
TRV 2-1213M		15 VDC	134 mA			83 %
TRV 2-1221M		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TRV 2-1222M		+12 VDC	83 mA	-12 VDC	83 mA	83 %
TRV 2-1223M		+15 VDC	67 mA	-15 VDC	67 mA	82 %
TRV 2-1510M	12 - 18 VDC (15 VDC nom.)	3.3 VDC	600 mA			79 %
TRV 2-1511M		5 VDC	400 mA			81 %
TRV 2-1512M		12 VDC	167 mA			84 %
TRV 2-1513M		15 VDC	134 mA			83 %
TRV 2-1521M		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TRV 2-1522M		+12 VDC	83 mA	-12 VDC	83 mA	83 %
TRV 2-1523M		+15 VDC	67 mA	-15 VDC	67 mA	80 %
TRV 2-2410M	19.2 - 28.8 VDC (24 VDC nom.)	3.3 VDC	600 mA			78 %
TRV 2-2411M		5 VDC	400 mA			80 %
TRV 2-2412M		12 VDC	167 mA			82 %
TRV 2-2413M		15 VDC	134 mA			82 %
TRV 2-2421M		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TRV 2-2422M		+12 VDC	83 mA	-12 VDC	83 mA	81 %
TRV 2-2423M		+15 VDC	67 mA	-15 VDC	67 mA	80 %

Note - If the input will be switched electromechanically, use an external 47 µF/63 V E/C. to avoid voltage transient.

Input Specifications

Input Current	- At no load	5 Vin models: 5 mA typ. (3.3 Vout model) 5 mA typ. (5 Vout model) 20 mA typ. (12 Vout model) 20 mA typ. (15 Vout model) 5 mA typ. (5 / -5 Vout model) 20 mA typ. (12 / -12 Vout model) 25 mA typ. (15 / -15 Vout model)
		12 Vin models: 4 mA typ. (3.3 Vout model) 4 mA typ. (5 Vout model) 10 mA typ. (12 Vout model) 10 mA typ. (15 Vout model) 4 mA typ. (5 / -5 Vout model) 10 mA typ. (12 / -12 Vout model) 10 mA typ. (15 / -15 Vout model)
		15 Vin models: 4 mA typ. (3.3 Vout model) 4 mA typ. (5 Vout model) 8 mA typ. (12 Vout model) 8 mA typ. (15 Vout model) 4 mA typ. (5 / -5 Vout model) 8 mA typ. (12 / -12 Vout model) 8 mA typ. (15 / -15 Vout model)
		24 Vin models: 3 mA typ. (3.3 Vout model) 3 mA typ. (5 Vout model) 6 mA typ. (12 Vout model) 6 mA typ. (15 Vout model) 3 mA typ. (5 / -5 Vout model) 6 mA typ. (12 / -12 Vout model) 6 mA typ. (15 / -15 Vout model)
	- At full load	5 Vin models: 510 mA typ. 12 Vin models: 210 mA typ. 15 Vin models: 170 mA typ. 24 Vin models: 105 mA typ.
Surge Voltage		5 Vin models: 15 VDC max. (1 s max.) 12 Vin models: 25 VDC max. (1 s max.) 15 Vin models: 25 VDC max. (1 s max.) 24 Vin models: 35 VDC max. (1 s max.)
Recommended Input Fuse		5 Vin models: 1'000 mA (slow blow) 12 Vin models: 500 mA (slow blow) 15 Vin models: 500 mA (slow blow) 24 Vin models: 315 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Capacitor

Output Specifications

Voltage Set Accuracy		±3% max. (60% load: 3.3, 5, ±5 Vout models) ±3% max. (90% load: other models)
Regulation	- Input Variation (Vmin - Vmax) - Load Variation - Voltage Balance (symmetrical load) - Cross Regulation (25% / 100% asym. load)	single output models: 2% max. dual output models: 2% max. See application note: www.tracopower.com/overview/trv2m dual output models: 4% max. dual output models: 4% max.

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Ripple and Noise (20 MHz Bandwidth)	- single output	3.3 Vout models: 100 mVp-p typ. 5 Vout models: 100 mVp-p typ. 12 Vout models: 125 mVp-p typ. 15 Vout models: 125 mVp-p typ.
	- dual output	5 / -5 Vout models: 100 / 100 mVp-p typ. 12 / -12 Vout models: 125 / 125 mVp-p typ. 15 / -15 Vout models: 125 / 125 mVp-p typ.
Capacitive Load	- single output	3.3 Vout models: 2'000 µF max. 5 Vout models: 820 µF max. 12 Vout models: 470 µF max. 15 Vout models: 470 µF max.
	- dual output	5 / -5 Vout models: 470 / 470 µF max. 12 / -12 Vout models: 220 / 220 µF max. 15 / -15 Vout models: 220 / 220 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.03 %/K max.
Start-up Time		20 ms max.
Short Circuit Protection		Continuous, Automatic recovery

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Medical Equipment	EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 2 x MOPP (Means Of Patient Protection) www.tracopower.com/overview/trv2m
	- Certification Documents	
Pollution Degree		PD 2
Over Voltage Category		Not mains connected

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 60601-1-2 edition 4 (Medical Devices) EN 55011 class A (with external filter) EN 55011 class B (with external filter) EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55011 class A (with external filter) EN 55011 class B (with external filter) EN 55032 class A (with external filter) EN 55032 class B (with external filter) External filter proposal: www.tracopower.com/overview/trv2m
EMS Immunity	- Electrostatic Discharge	EN 55024 (IT Equipment) EN 60601-1-2 edition 4 (Medical Devices) Air: EN 61000-4-2, ±15 kV, perf. criteria A Contact: EN 61000-4-2, ±8 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A External filter proposal: www.tracopower.com/overview/trv2m
	- Conducted RF Disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity	95% max. (non condensing)
-------------------	---------------------------

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature	-40°C to +95°C +105°C max. -55°C to +125°C
Power Derating	- High Temperature	Depending on model See application note: www.tracopower.com/overview/trv2m
Cooling System		Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Switching Frequency		180 - 360 kHz (PFM)
Insulation System		Reinforced Insulation
Isolation Test Voltage	- Input to Output, 60 s - Input to Output, 1 s	5'000 VAC 7'000 VDC
Creepage	- Input to Output	8 mm min.
Clearance	- Input to Output	8 mm min.
Isolation Resistance	- Input to Output, 500 VDC	10'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	10 pF typ. 20 pF max.
Leakage Current	- Touch Current	2 μA max. (240 VAC, 60 Hz)
Reliability	- Calculated MTBF	10'410'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Allowed (hermetical product) See Cleaning Guideline: www.tracopower.com/info/cleaning.pdf
Environment	- Vibration - Mechanical Shock - Thermal Shock	MIL-STD-810F 7.6 g, 3 axis, 60 min, 20-2000 Hz MIL-STD-810F 50 g, 3 axis, 11 ms MIL-STD-810F -55°C to +125°C, 72 cycles, 30 min each
Housing Material		Non-conductive Plastic (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Tinned Copper
Pin Foundation Plating		Nickel (2 - 3 μm)
Pin Surface Plating		Tin (3 - 5 μm), matte
Housing Type		Plastic Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		SIP9
Soldering Profile		Wave Soldering 260°C / 6 s max.
Weight		4.8 g
Environmental Compliance	- REACH Declaration - RoHS Declaration	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-1 (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)


Supporting Documents

Overview Link (for additional Documents)


www.tracopower.com/overview/trv2m

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

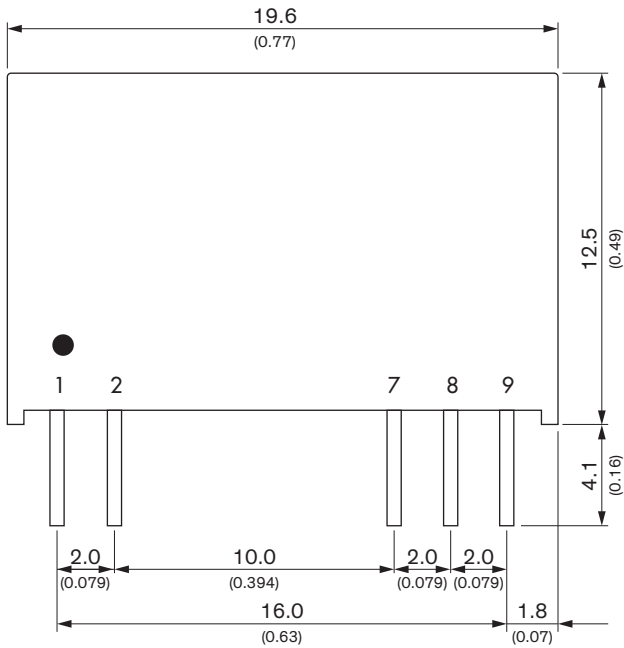

Pinout		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
7	-Vout	-Vout
8	No Pin	Common
9	+Vout	+Vout

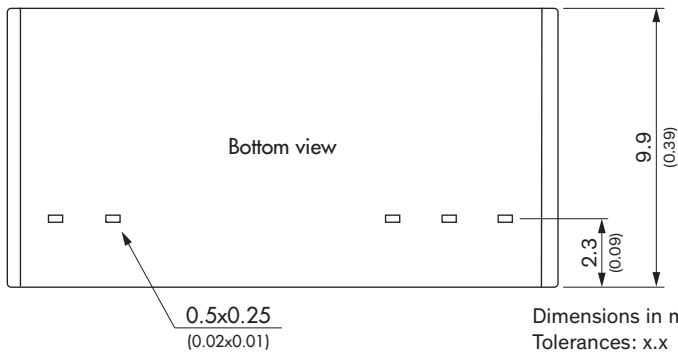

Dimensions in mm (inch)
 Tolerances: x.x ±0.5 (±0.02)
 x.xx ±0.25 (±0.01)
 Pin diameter ±0.1 (±0.004)