

TSP7N60S/ TSF7N60S 600V N-Channel MOSFET


Description

SJ-FET is new generation of high voltage MOSFET family that is utilizing an advanced charge balance mechanism for outstanding low on-resistance and lower gate charge performance.

This advanced technology has been tailored to minimize conduction loss, provide superior switching performance, and withstand extreme dv/dt rate and higher avalanche energy. SJ-FET is suitable for various AC/DC power conversion in switching mode operation for higher efficiency.

Features

- 650V @ $T_J = 150\text{ }^{\circ}\text{C}$
- Typ. $R_{DS(on)} = 0.58\text{ }\Omega$
- Ultra Low Gate Charge (typ. $Q_g = 9\text{nC}$)
- 100% avalanche tested
- RoHS Compliant



Absolute Maximum Ratings

Symbol	Parameter	TSP7N60S	TSF7N60S	Unit
V_{DSS}	Drain-Source Voltage	600		V
I_D	Drain Current - Continuous ($T_C = 25\text{ }^{\circ}\text{C}$)	7	7*	A
	-Continuous ($T_C = 100\text{ }^{\circ}\text{C}$)	5	5*	
I_{DM}	Drain Current - Pulsed	(Note 1)	11	A
V_{GSS}	Gate-Source voltage		± 30	V
E_{AS}	Single Pulsed Avalanche Energy	(Note 2)	86	mJ
I_{AR}	Avalanche Current	(Note 1)	1.7	A
E_{AR}	Repetitive Avalanche Energy	(Note 1)	43	mJ
dv/dt	Peak Diode Recovery dv/dt	(Note 3)	4.5	V/ns
P_D	Power Dissipation ($T_C = 25\text{ }^{\circ}\text{C}$)	104	35	W
	-Derate above $25\text{ }^{\circ}\text{C}$	0.8	0.3	W/ $^{\circ}\text{C}$
T_J, T_{STG}	Operating and Storage Temperature Range		-55 to +150	$^{\circ}\text{C}$
T_L	Maximum Lead Temperature for Soldering Purpose, 1/8" from Case for 5 Seconds		300	$^{\circ}\text{C}$

* Drain current limited by maximum junction temperature.

Thermal Characteristics

Symbol	Parameter	TSP7N60S	TSF7N60S	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	1.5	3.6	$^{\circ}\text{C}/\text{W}$
$R_{\theta CS}$	Thermal Resistance, Case-to-Sink Typ.	--	--	$^{\circ}\text{C}/\text{W}$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	75	62	$^{\circ}\text{C}/\text{W}$

Electrical Characteristics TC = 25°C unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Off Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0V, ID = 250µA, TJ = 25°C	600	--	--	V
		V _{GS} = 0V, ID = 250µA, TJ = 150°C	--	650	--	V
Δ BV _{DSS} / Δ TJ	Breakdown Voltage Temperature Coefficient	ID = 250µA, Referenced to 25°C	--	0.6	--	V/°C
ID _{SS}	Zero Gate Voltage Drain Current	V _{DS} = 600V, V _{GS} = 0V V _{DS} = 480V, TC = 125°C	--	--	1 10	µA µA
I _{GTSF}	Gate-Body Leakage Current, Forward	V _{GS} = 30V, V _{DS} = 0V	--	--	100	nA
I _{GSSR}	Gate-Body Leakage Current, Reverse	V _{GS} = -30V, V _{DS} = 0V	--	--	-100	nA
On Characteristics						
V _{G(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , ID = 250µA	2.5	3.5	4.5	V
R _{D(on)}	Static Drain-Source On-Resistance	V _{GS} = 10V, ID = 3.5A	--	0.58	0.65	Ω
g _{FS}	Forward Transconductance	V _{DS} = 40V, ID = 3.5A (Note 4)	--	16	--	S
R _g	Gate Resistance	F=1MHz, open drain	--	4.5	--	Ω
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} = 25V, V _{GS} = 0V, f = 1.0MHz	--	360	--	pF
C _{oss}	Output Capacitance		--	25	--	pF
C _{rss}	Reverse Transfer Capacitance		--	1.2	--	pF
Switching Characteristics						
t _{d(on)}	Turn-On Delay Time	V _{DD} = 400V, ID = 3.5A RG = 20Ω (Note 4, 5)	--	25	--	ns
t _r	Turn-On Rise Time		--	55	--	ns
t _{d(off)}	Turn-Off Delay Time		--	70	--	ns
t _f	Turn-Off Fall Time		--	40	--	ns
Q _g	Total Gate Charge	V _{DS} = 480V, ID = 3.5A V _{GS} = 10V (Note 4, 5)	--	8	--	nC
Q _{gs}	Gate-Source Charge		--	2.0	--	nC
Q _{gd}	Gate-Drain Charge		--	2.7	--	nC
Drain-Source Diode Characteristics and Maximum Ratings						
I _S	Maximum Continuous Drain-Source Diode Forward Current	--	--	7	A	
I _{SM}	Maximum Pulsed Drain-Source Diode Forward Current	--	--	18	A	
V _{SD}	Drain-Source Diode Forward Voltage	V _{GS} = 0V, I _S = 7A	--	--	1.5	V
t _{rr}	Reverse Recovery Time	V _{GS} = 0V, I _S = 7A dI/dt = 100A/µs (Note 4)	--	190	--	ns
Q _{rr}	Reverse Recovery Charge		--	2.3	--	µC

NOTES:

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. L=60mH, I_{AS}=1.7A, V_{DD}=150V, Starting TJ=25 °C
3. I_{SD}≤7A, di/dt≤200A/us, V_{DD}≤BV_{DSS}, Starting TJ = 25 °C
4. Pulse Test: Pulse width ≤ 300us, Duty Cycle ≤ 2%
5. Essentially Independent of Operating Temperature Typical Characteristics

Typical Performance Characteristics

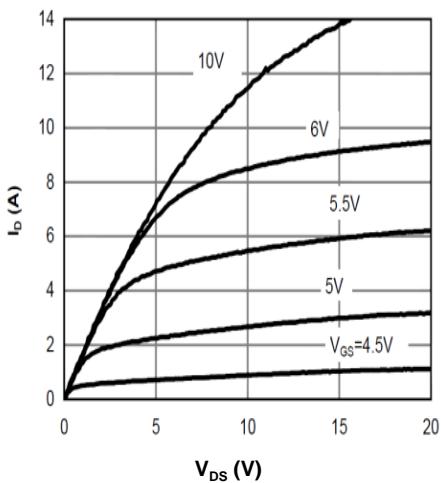


Figure 1: On-Region Characteristics@25° C

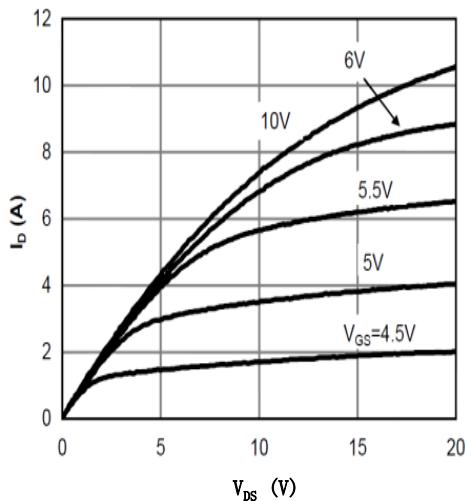


Figure 2: On-Region Characteristics@125° C

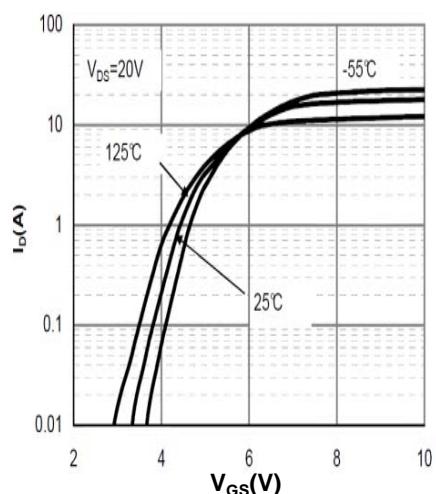


Figure 3: Transfer Characteristics

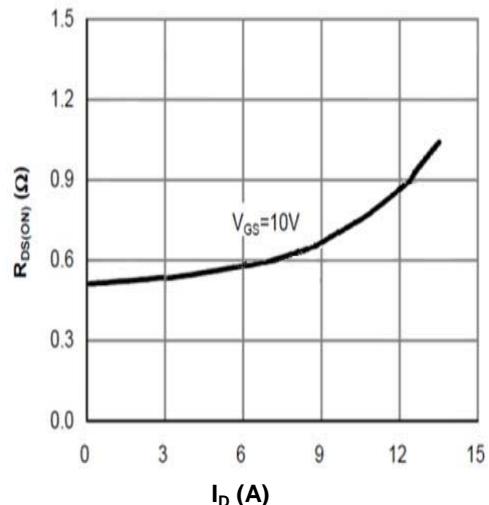


Figure 4: On-Resistance vs. Drain Current and Gate Voltage

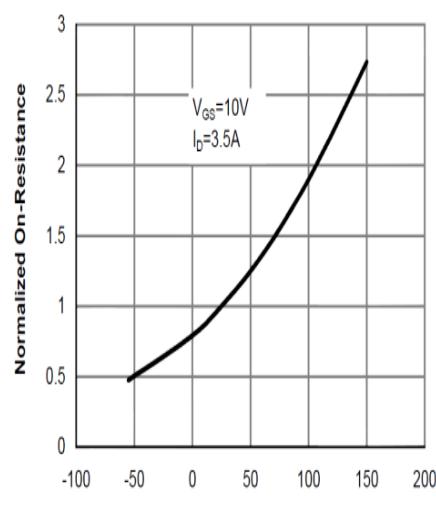


Figure 5: On-Resistance vs. Junction Temperature

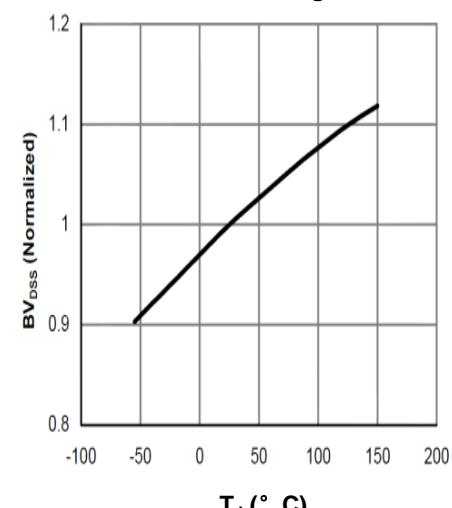


Figure 6: Break Down vs. Junction Temperature

Typical Performance Characteristics

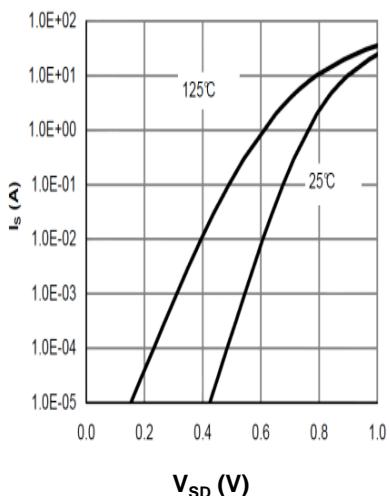


Figure 7: Body-Diode Characteristics

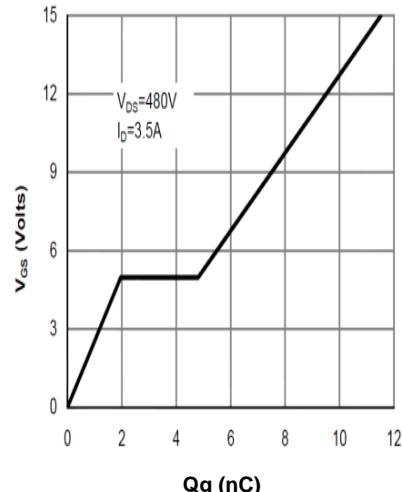


Figure 8: Gate-Charge Characteristics

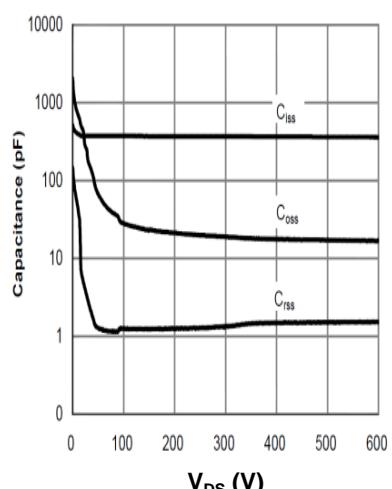


Figure 9: Capacitance Characteristics

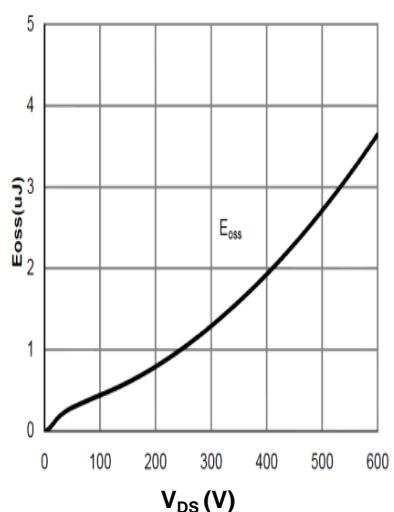


Figure 10: C_{oss} stored Energy

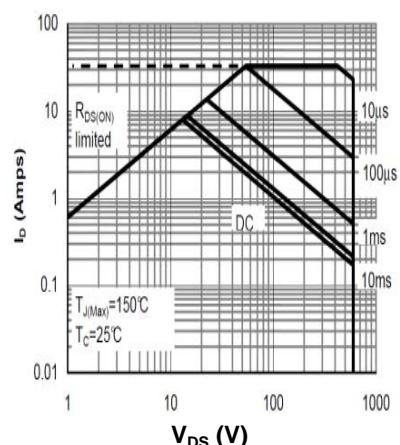


Figure 11: Maximum Forward Biased Safe Operating Area

Typical Performance Characteristics

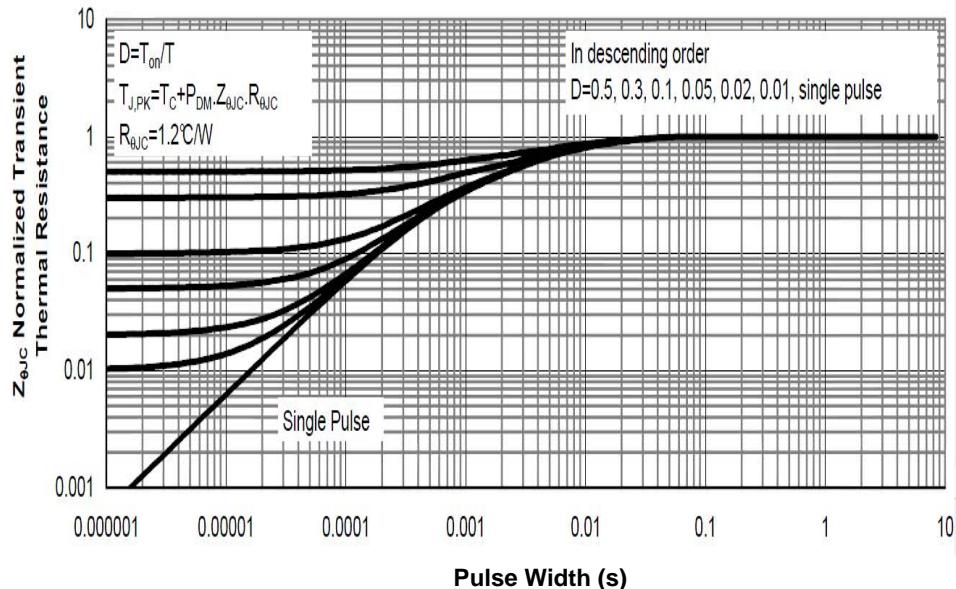


Figure 12: Normalized Maximum Transient Thermal Impedance

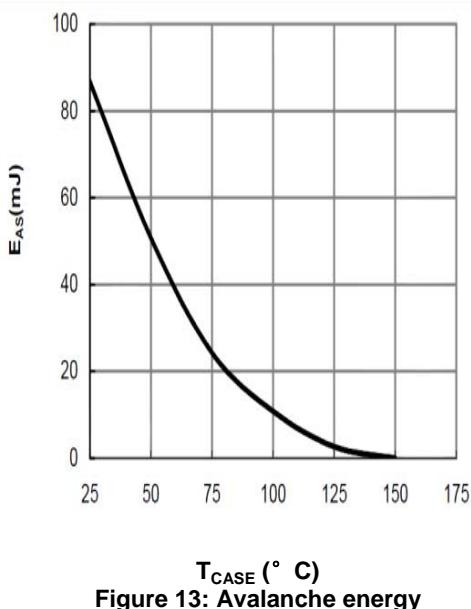


Figure 13: Avalanche energy

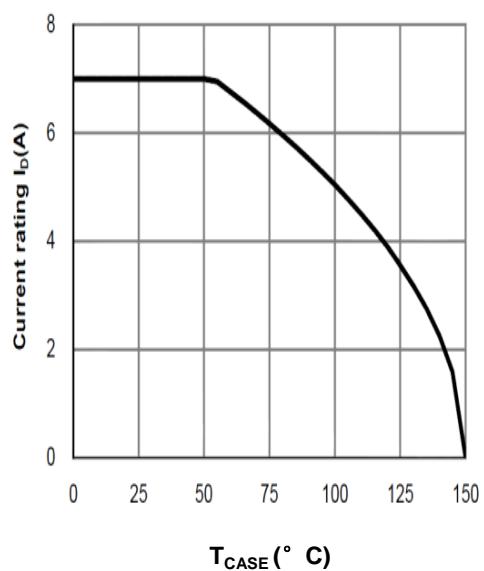


Figure 14: Current De-rating

Typical Performance Characteristics


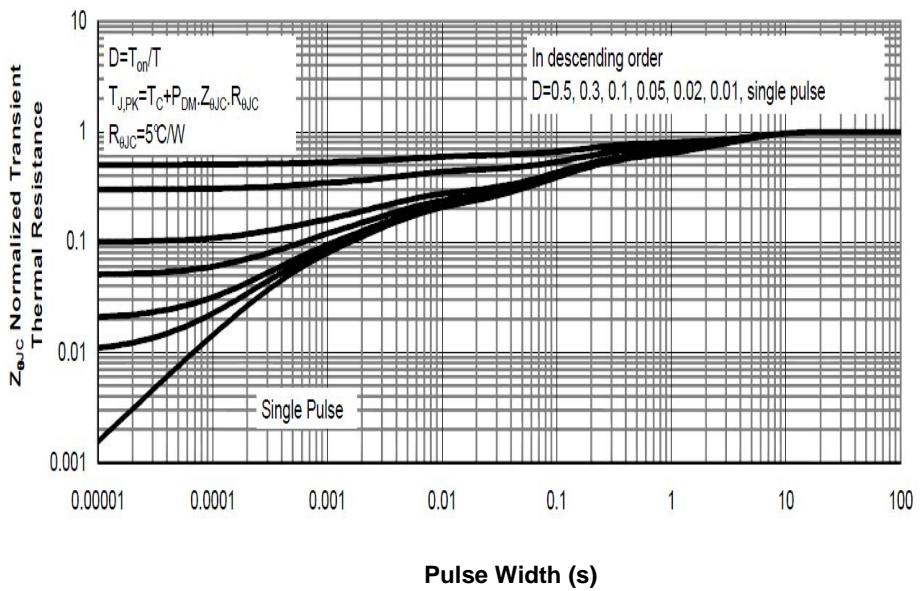


Figure 15: Normalized Maximum Transient Thermal Impedance


Test circuits

Switching times test circuit and waveform for inductive load

Switching times test circuit for inductive load

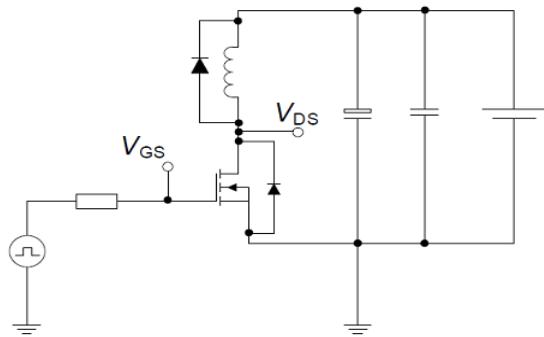


Switching time waveform

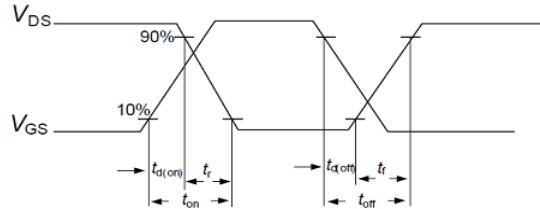


Unclamped inductive load test circuit and waveform

Unclamped inductive load test circuit

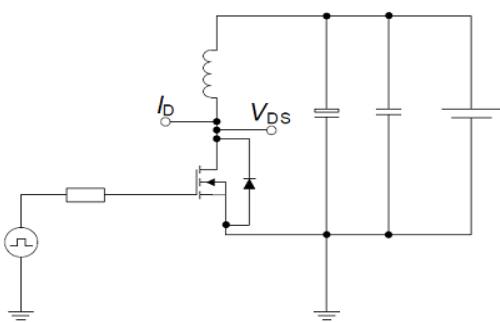


Unclamped inductive waveform

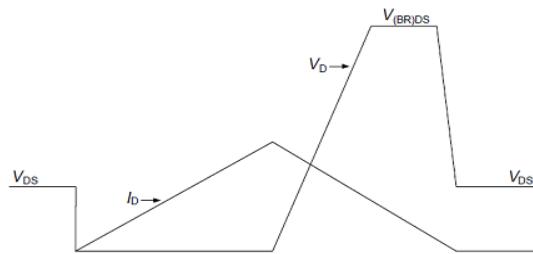


Test circuit and waveform for diode characteristics


Test circuit for diode characteristics

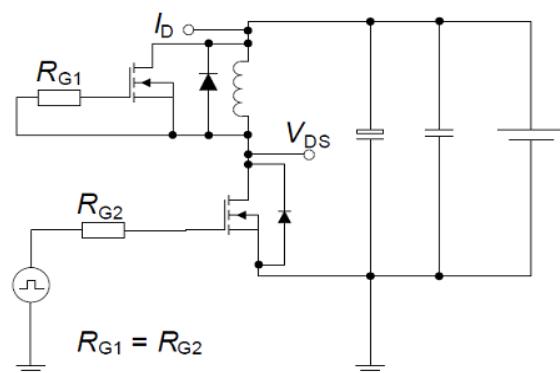

Diode recovery waveform

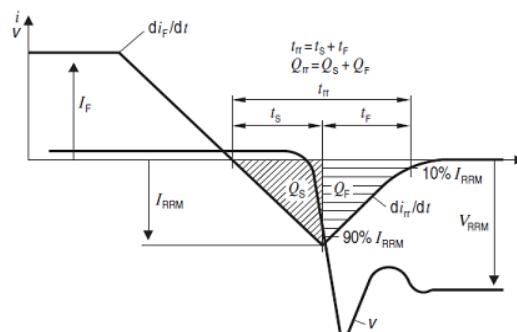


PKG TO-220F

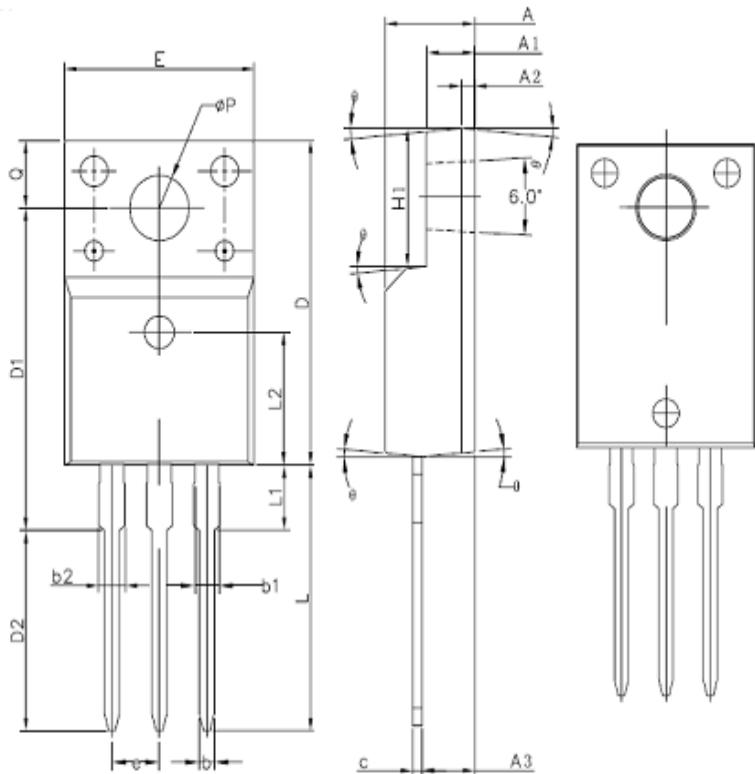


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	4.50	4.70	4.90
A1	2.34	2.54	2.74
A2		0.70 REF	
A3	2.56	2.76	2.96
b	0.70	—	0.90
b1	1.18	—	1.38
b2	—	—	1.47
c	0.45	0.50	0.60
D	15.67	15.87	16.07
D1	15.55	15.75	15.95
D2	9.60	9.80	10.0
E	9.96	10.16	10.36
e		2.54BSC	
H1	6.48	6.68	6.88
L	12.68	12.98	
L1	—	—	3.50
L2		6.50REF	
ØP	3.08	3.18	3.28
Q	3.20	—	3.40
θ	3°	5°	7°

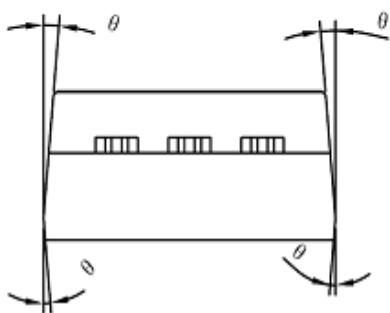

PKG TO-220

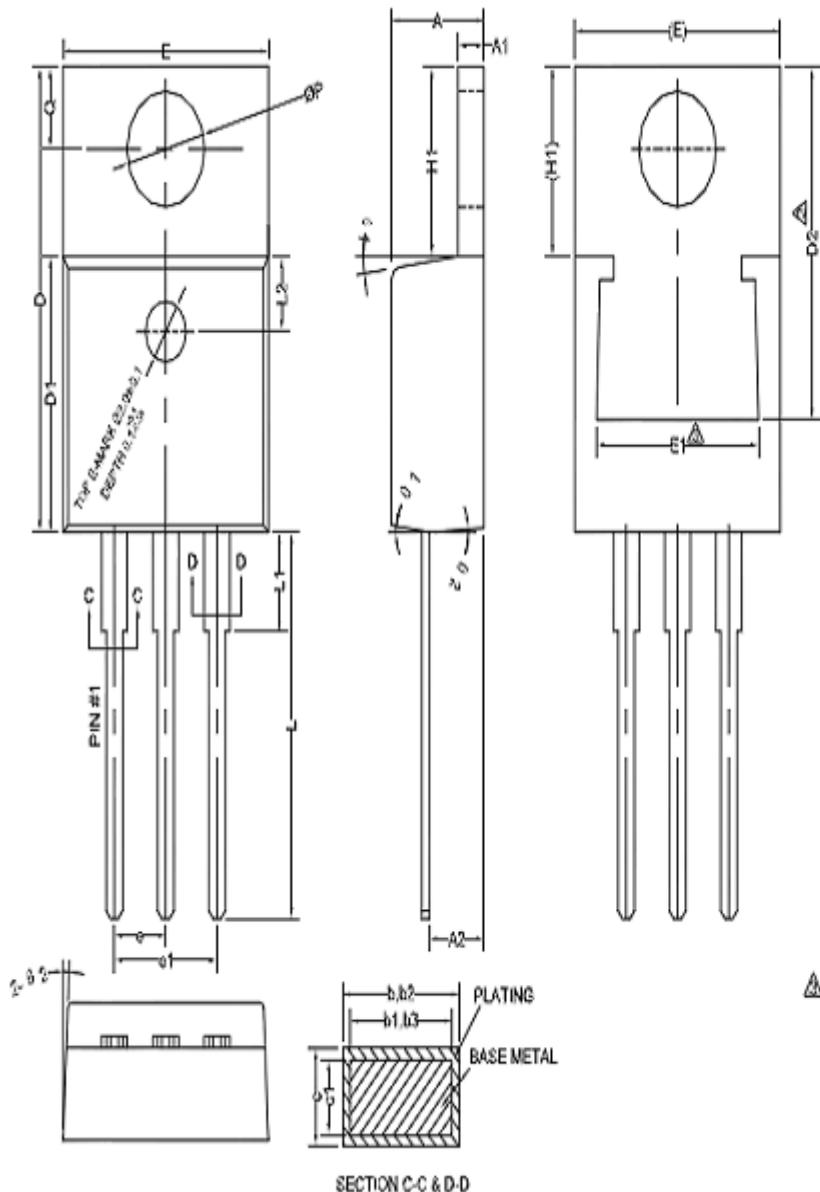COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	4.40	4.57	4.70
A1	1.22	-	1.32
A2	2.59	2.86	2.96
b	0.77	-	0.90
b1	0.76	0.81	0.85
b2	1.23	-	1.35
b3	1.22	1.27	1.32
c	0.34	-	0.47
c1	0.33	0.38	0.43
D	15.15	15.45	15.75
D1	9.05	9.15	9.25
D2	11.40	-	12.88
E	9.98	10.13	10.33
E1	3.86	-	6.89
e	2.44	2.54	2.64
e1	4.98	5.06	5.1
H1	3.10	3.30	3.50
L	12.70	-	13.12
L1	-	-	3.90
L2		2.50REF	
DP	3.80	3.84	3.88
Q	2.80	-	2.90
g1	5"	7"	9"
g2	1"	3"	6"

NOTES:

1. ALL DIMENSIONS REFER TO JEDEC STANDARD TO-220 AB DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.

▲ 2'D2' AND 'E1' ARE VARIABLES DEPENDING ON DIE PAD SIZES.