

5A High Voltage Schottky Barrier Rectifiers

Features

- Epitaxial Construction
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 150A Peak
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications.
- RoHS Compliant



DO-201AD



Mechanical Data

Case:	DO-201AD, Molded Plastic
Terminals:	Axial leads, solderable per MIL-STD-750, Method 2026
Polarity:	Color band denotes cathode
Mounting Position	Any
Weight:	1.122 grams

5A High Voltage Schottky Barrier Rectifiers

TSR5100 - TSR5200

Maximum Ratings and Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless noted otherwise)

Symbol	Description	TSR5100	TSR5150	TSR5200	Unit	Conditions
V_{RRM}	Max. Recurrent Peak Reverse Voltage	100	150	200	V	
V_{RMS}	Max. RMS Voltage	70	105	140	V	
V_{DC}	Max. DC Blocking Voltage	100	150	200	V	
I_{AV}	Max. Average Forward Rectified Current	5.0			A	Fig.1
I_{FSM}	Peak Forward Surge Current	150			A	8.3ms single half sine-wave superimposed on rated load
V_F	Maximum Instantaneous Forward Voltage	0.85	0.90		V	I _F =5.0 A (Note 3)
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	0.05			mA	T _A =25° C
		10				T _A =100° C
R_{thJA}	Typical Thermal Resistance	50			°C / W	Note 2
R_{thJL}		15				Note 1
R_{thJC}		12				Note 1
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-65 to +150			°C	

Note:

1. Measured at ambient temperature at a distance of 9.5mm from the case
2. Minimum Pad Area
3. Pulse test : 300µs pulse width, 1% duty cycle

Typical Characteristics Curves

Fig.1- Typical Forward Current Derating Curve


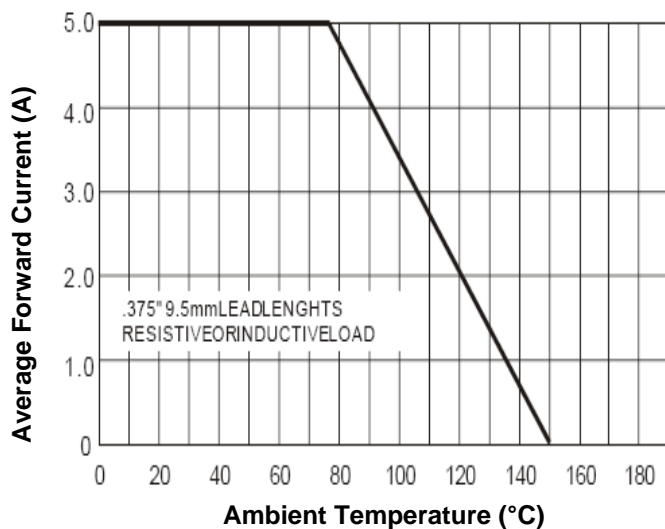


Fig.2- Maximum Non-repetitive Peak Forward Surge Current

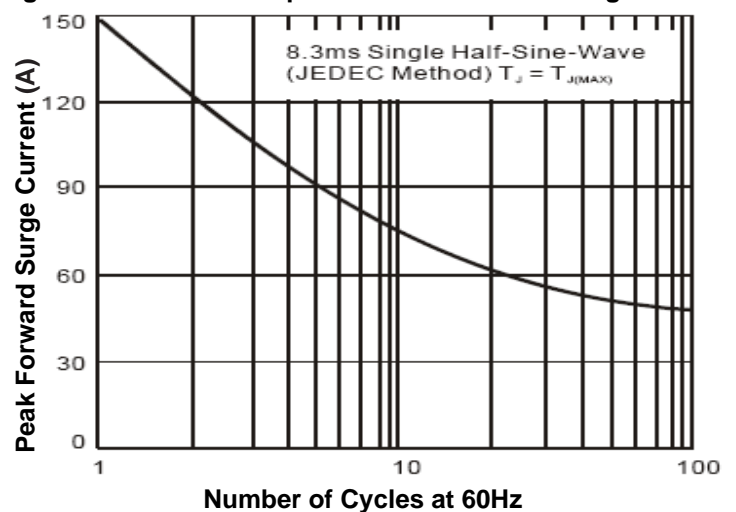

5A High Voltage Schottky Barrier Rectifiers

TSR5100 - TSR5200

Fig.3- Typical Reverse Current

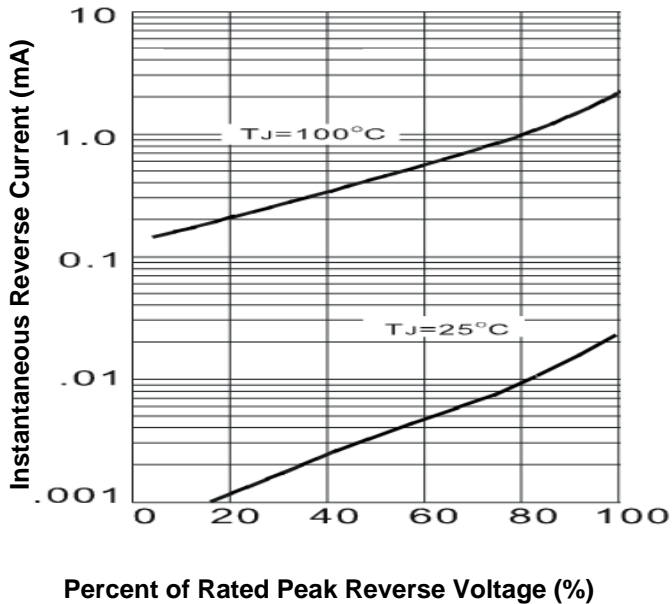


Fig.4- Typical Instantaneous Forward Characteristics


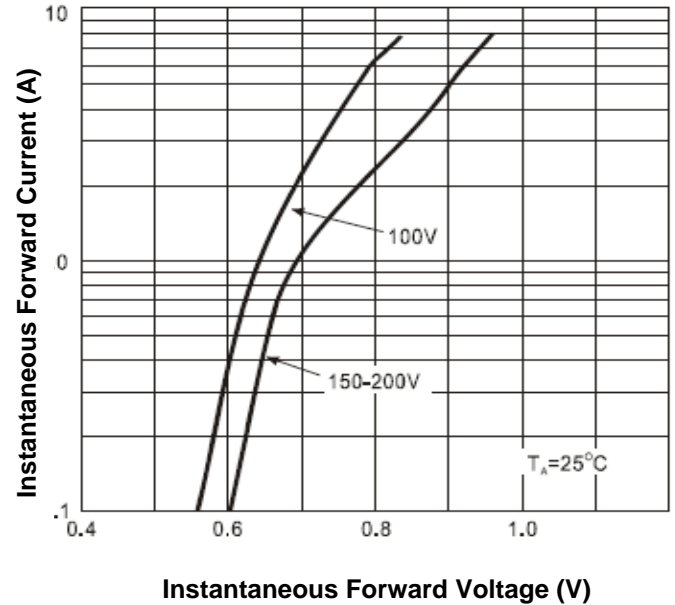



Fig.5- Typical junction capacitance

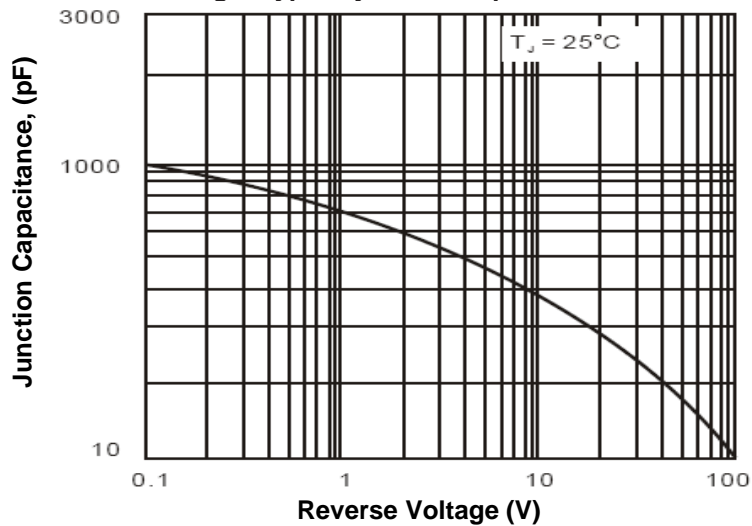


5A High Voltage Schottky Barrier Rectifiers

TSR5100 - TSR5200

Dimensions in inches (mm)

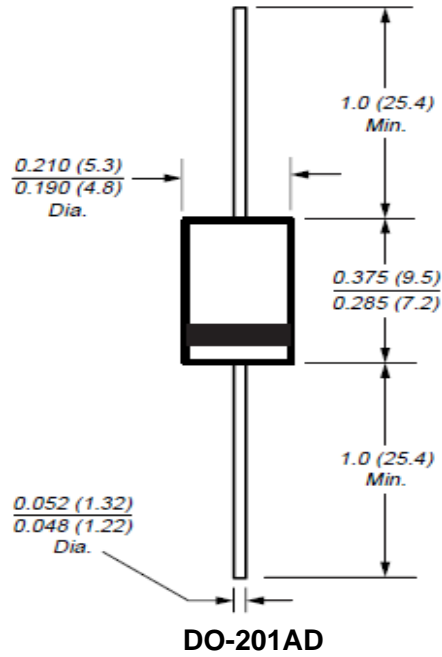

Marking Code

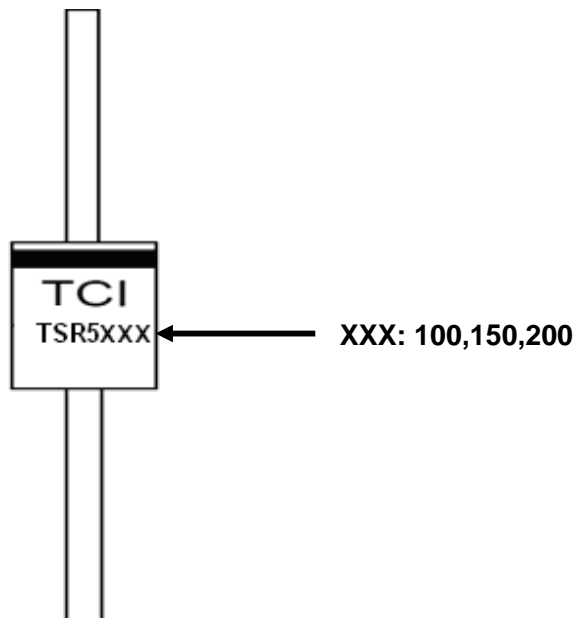

5A High Voltage Schottky Barrier Rectifiers

TSR5100 - TSR5200

How to contact us

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 247-2232 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.

42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931