


FRD Type : TSU05B60

OUTLINE DRAWING

For Power Factor Improvement High Frequency Rectification

FEATURES

- * Ultra – Fast Recovery
- * Low Forward Voltage Drop
- * Low Power Loss, High Efficiency
- * High Surge Capability

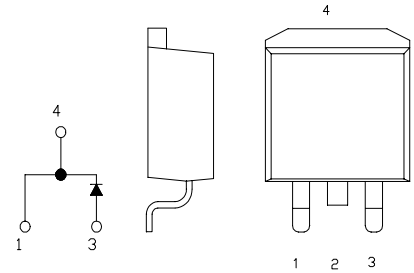

Maximum Ratings




Approx Net Weight:1.45g

Rating	Symbol	TSU05B60			Unit
Repetitive Peak Reverse Voltage	V _{RRM}	600			V
Average Rectified Output Current	I _O	5	Tc=89℃	50 Hz Half Sine Wave Resistive Load	A
RMS Forward Current	I _{F(RMS)}	15.7			A
Surge Forward Current	I _{FSM}	60	50 Hz Half Sine Wave,1cycle Non-repetitive		A
Operating JunctionTemperature Range	T _{jw}	- 40 to + 150			℃
Storage Temperature Range	T _{stg}	- 40 to + 150			℃
Mounting torque		0.5	Recommended value		N•m



Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j= 25^{\circ}C, V_{RM}= V_{RRM}$	-	-	30	μA
Peak Forward Voltage	V_{FM}	$T_j= 25^{\circ}C, I_{FM}= 5A$	-	2.3	2.7	V
Reverse Recovery Time	t_{rr}	$I_{FM}= 5A,$ $-di/dt= 50 A/\mu s, T_a= 25^{\circ}C$	-	19	30	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	5	$^{\circ}C/W$


TSU_ OUTLINE DRAWING (Dimensions in mm)

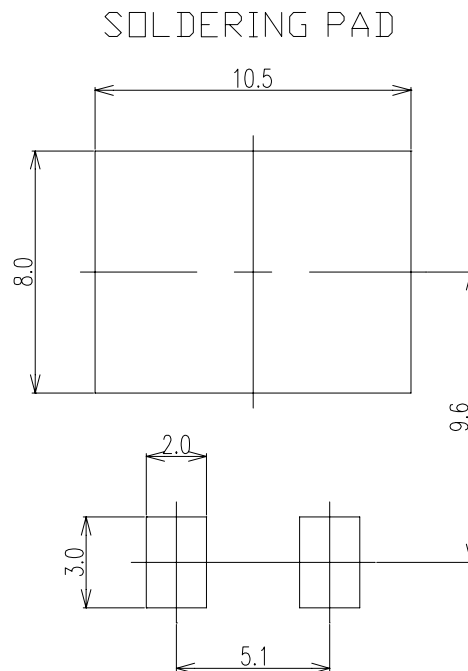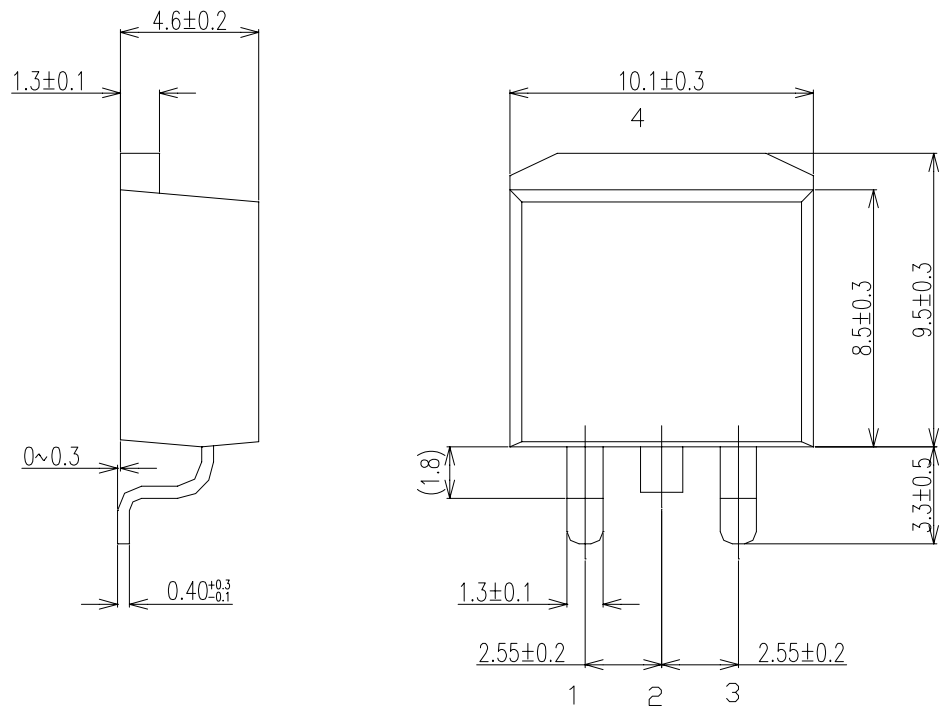


FORWARD CURRENT VS. VOLTAGE

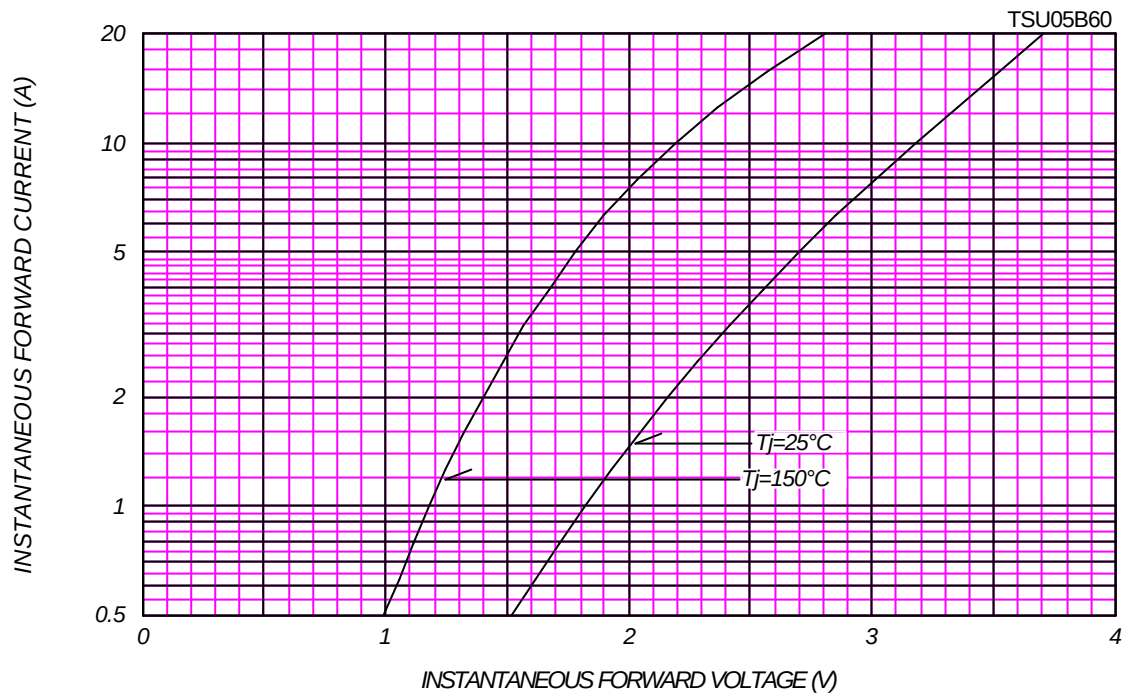


AVERAGE FORWARD POWER DISSIPATION

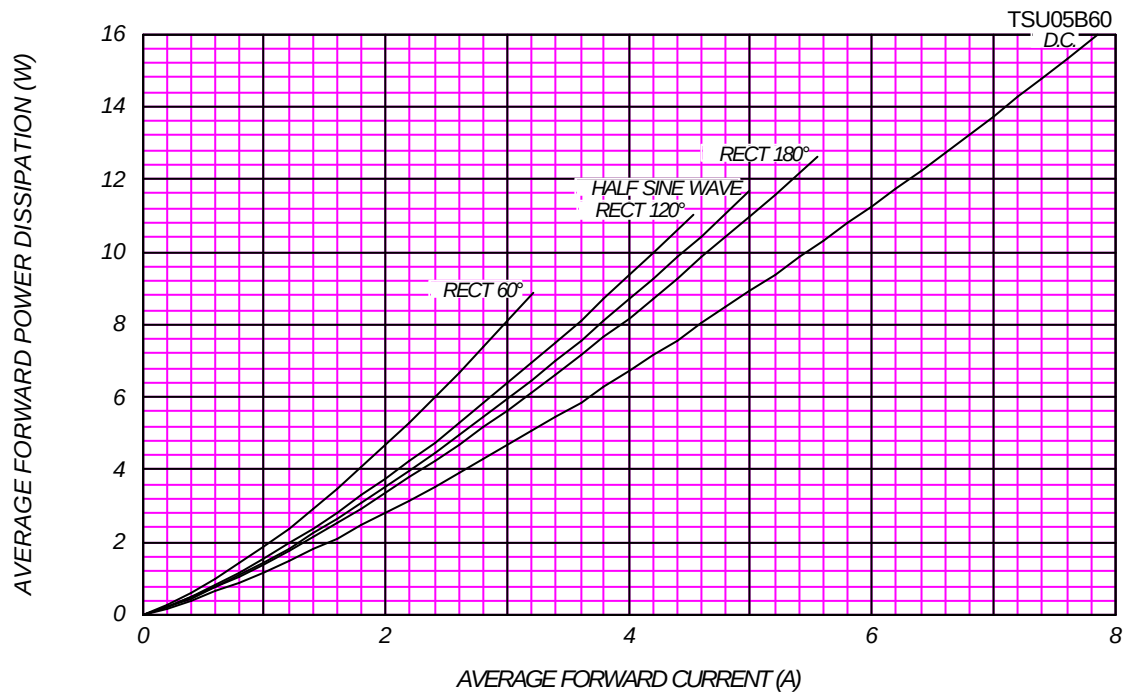




AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

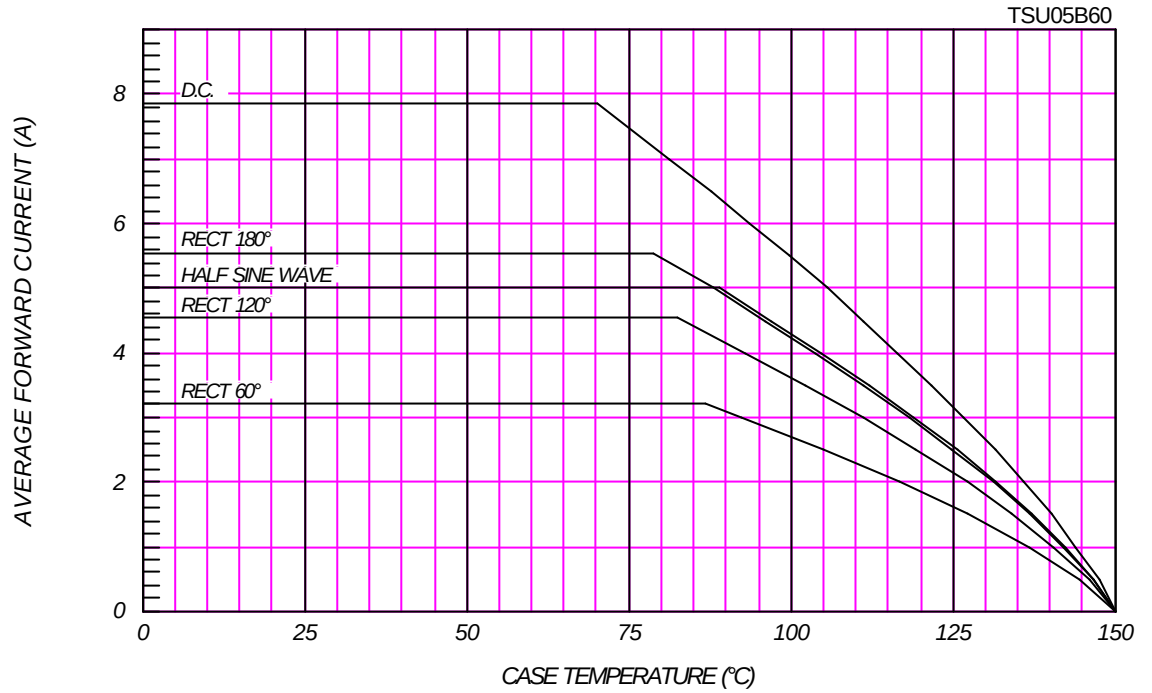

SURGE CURRENT RATINGS

f=50Hz, Sine Wave, Non-Repetitive, No Load

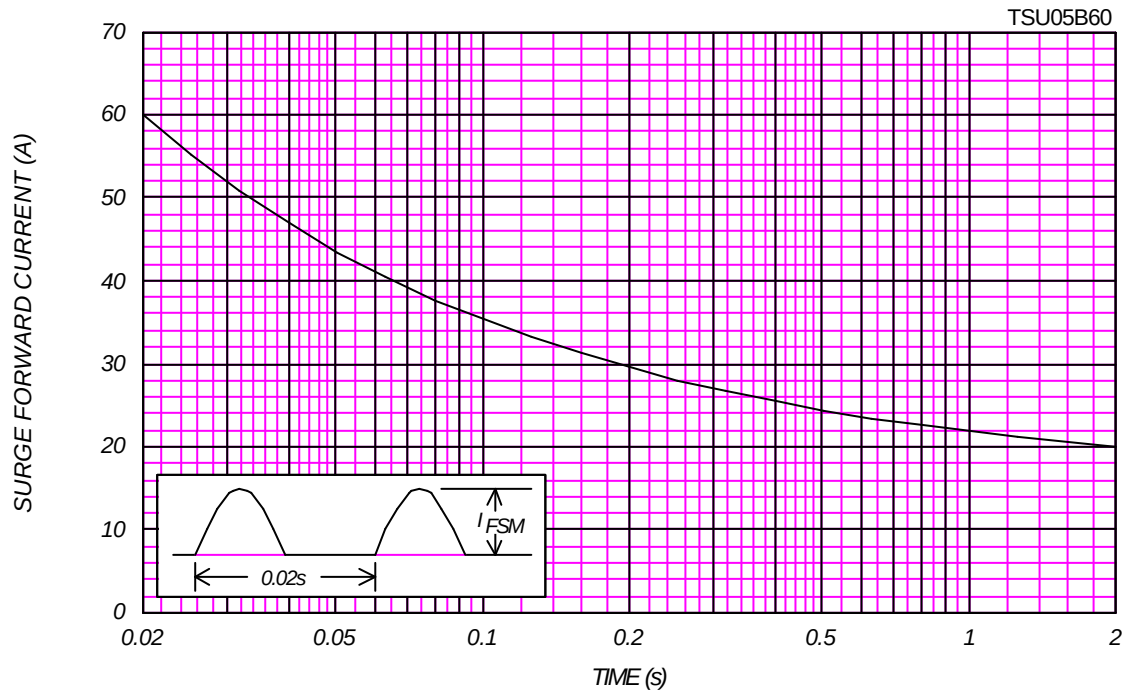

RMS SURGE CURRENT RATINGS

Ta=40°C,Non-Repetitive,No Load

TSU05B60

