



FOR MESSRS : \_\_\_\_\_

DATE : Nov.12<sup>th</sup>,2024

## CUSTOMER'S ACCEPTANCE SPECIFICATIONS

### TX18D200VM0EAA

#### Contents

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701-TX18D200VM0EAA-3	1-1/1
2	RECORD OF REVISION	7B64PS 2702-TX18D200VM0EAA-3	2-1/2~2/2
3	GENERAL DATA	7B64PS 2703-TX18D200VM0EAA-3	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704-TX18D200VM0EAA-3	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705-TX18D200VM0EAA-3	5-1/2~2/2
6	OPTICAL CHARACTERISTICS	7B64PS 2706-TX18D200VM0EAA-3	6-1/2~2/2
7	BLOCK DIAGRAM	7B64PS 2707-TX18D200VM0EAA-3	7-1/1
8	RELIABILITY TESTS	7B64PS 2708-TX18D200VM0EAA-3	8-1/1
9	LCD INTERFACE	7B64PS 2709-TX18D200VM0EAA-3	9-1/7~7/7
10	OUTLINE DIMENSIONS	7B64PS 2710-TX18D200VM0EAA-3	10-1/2~2/2
11	APPEARANCE STANDARD	7B64PS 2711-TX18D200VM0EAA-3	11-1/3~3/3
12	PRECAUTIONS	7B64PS 2712-TX18D200VM0EAA-3	12-1/2~2/2
13	DESIGNATION OF LOT MARK	7B64PS 2713-TX18D200VM0EAA-3	13-1/1


ACCEPTED BY: \_\_\_\_\_

PROPOSED BY: Oblack Tsai

JDI Taiwan Inc. Kaohsiung Branch	SHEET NO.	7B64PS 2701-TX18D200VM0EAA-3	PAGE	1-1/1
----------------------------------	-----------	------------------------------	------	-------

## 2. RECORD OF REVISION

DATE	SHEET No.	SUMMARY																																																																																																																							
Jan.03,'23	7B64PS 2701 – TX18D200VM0EAA-2 Page 1 – 1/1	Company logo changed : <div><div><div>KOE</div><div>JDI Group</div><div>Kaohsiung Opto-Electronics Inc.</div></div><div>→</div><div><div>JDI</div><div>Japan Display Inc.</div></div></div>																																																																																																																							
	7B64PS 2713 – TX18D200VM0EAA-2 Page 13 – 1/1																																																																																																																								
	All page	Company name changed: From “KAOHSIUNG OPTO-ELECTRONICS INC.” to “JDI Taiwan Inc. Kaohsiung Branch”																																																																																																																							
Nov.12,'24	7B64PS 2703 – TX18D200VM0EAA-3 Page 3-1/1	3.1 DISPLAY FEATURES Revised amorphous silicon TFT → LTPS TFT 0.53W for LCD → 0.84W for LCD 4.62W for Backlight → 7.14W for Backlight																																																																																																																							
	7B64PS 2704 – TX18D200VM0EAA-3 Page 4-1/1	4. ABSOLUTE MAXIMUM RATINGS Revised Operating Temperature Min. -20 → -40、Max.70 → 85 Storage Temperature Min. -30 → -40、Max.80 → 90																																																																																																																							
	7B64PS 2705 – TX18D200VM0EAA-3 Page 5-1/2	5.1 LCD CHARACTERISTICS Revised Power Supply Current Typ. 160 → 255、Max. 210 → 310 Frame Frequency Max. 67 → - Hsync Frequency Max. 69 → 68.1 CLK Frequency Max. 160 → 150 Note 4 Delete																																																																																																																							
	7B64PS 2705 – TX18D200VM0EAA-3 Page 5-2/2	5.2 BACKLIGHT CHARACTERISTICS Revised LED Forward Current Typ. 385 → 595 Typ. 65 → 35																																																																																																																							
	7B64PS 2706 – TX18D200VM0EAA-3 Page 6-1/2	6. OPTICAL CHARACTERISTICS Revised <div><table><tr><th>Item</th><th>Symbol</th><th>Condition</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Remarks</th></tr><tr><td>Brightness of White</td><td>-</td><td><math>\theta = 0^\circ, \theta = 0^\circ</math></td><td>560</td><td>700</td><td>-</td><td>cd/m<sup>2</sup></td><td>Note 1</td></tr><tr><td>Brightness Uniformity</td><td>-</td><td><math>\theta = 0^\circ, \theta = 0^\circ</math>, Isc= 385 mA</td><td>70</td><td>-</td><td>-</td><td>%</td><td>Note 2,3</td></tr><tr><td>Contrast Ratio</td><td>CR</td><td><math>\theta = 0^\circ, \theta = 0^\circ</math></td><td>500</td><td>800</td><td>-</td><td>-</td><td>Note 4</td></tr><tr><td>Response Time (Rising + Falling)</td><td>T<sub>r</sub> + T<sub>f</sub></td><td><math>\theta = 0^\circ, \theta = 0^\circ</math></td><td>-</td><td>23</td><td>-</td><td>ms</td><td>Note 5</td></tr><tr><td rowspan="4">Viewing Angle</td><td><math>\theta_x</math></td><td><math>\theta = 0^\circ, CR \geq 10</math></td><td>-</td><td>85</td><td>-</td><td>-</td><td rowspan="4">Degree Note 6</td></tr><tr><td><math>\theta_y</math></td><td><math>\theta = 180^\circ, CR \geq 10</math></td><td>-</td><td>85</td><td>-</td><td>-</td></tr><tr><td><math>\theta_z</math></td><td><math>\theta = 90^\circ, CR \geq 10</math></td><td>-</td><td>85</td><td>-</td><td>-</td></tr><tr><td><math>\theta_{xy}</math></td><td><math>\theta = 270^\circ, CR \geq 10</math></td><td>-</td><td>85</td><td>-</td><td>-</td></tr><tr><td rowspan="6">Color Chromaticity</td><td>Red</td><td>X</td><td>0.60</td><td>0.65</td><td>0.70</td><td>-</td><td rowspan="6">Note 7</td></tr><tr><td>Y</td><td>Y</td><td>0.27</td><td>0.30</td><td>0.35</td><td>-</td></tr><tr><td>Green</td><td>X</td><td>0.26</td><td>0.33</td><td>0.36</td><td>-</td></tr><tr><td>Y</td><td>Y</td><td>0.57</td><td>0.62</td><td>0.67</td><td>-</td></tr><tr><td>Blue</td><td>X</td><td>0.10</td><td>0.15</td><td>0.20</td><td>-</td></tr><tr><td>White</td><td>Y</td><td>0.01</td><td>0.06</td><td>0.11</td><td>-</td></tr><tr><td></td><td></td><td></td><td>0.27</td><td>0.32</td><td>0.37</td><td>-</td><td></td></tr><tr><td></td><td></td><td></td><td>0.29</td><td>0.34</td><td>0.39</td><td>-</td><td></td></tr></table><div><div>In the dark room around 500~1000 lx</div><div>↓</div><div>In the dark room around 100 lx</div></div></div>	Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks	Brightness of White	-	$\theta = 0^\circ, \theta = 0^\circ$	560	700	-	cd/m <sup>2</sup>	Note 1	Brightness Uniformity	-	$\theta = 0^\circ, \theta = 0^\circ$ , Isc= 385 mA	70	-	-	%	Note 2,3	Contrast Ratio	CR	$\theta = 0^\circ, \theta = 0^\circ$	500	800	-	-	Note 4	Response Time (Rising + Falling)	T <sub>r</sub> + T <sub>f</sub>	$\theta = 0^\circ, \theta = 0^\circ$	-	23	-	ms	Note 5	Viewing Angle	$\theta_x$	$\theta = 0^\circ, CR \geq 10$	-	85	-	-	Degree Note 6	$\theta_y$	$\theta = 180^\circ, CR \geq 10$	-	85	-	-	$\theta_z$	$\theta = 90^\circ, CR \geq 10$	-	85	-	-	$\theta_{xy}$	$\theta = 270^\circ, CR \geq 10$	-	85	-	-	Color Chromaticity	Red	X	0.60	0.65	0.70	-	Note 7	Y	Y	0.27	0.30	0.35	-	Green	X	0.26	0.33	0.36	-	Y	Y	0.57	0.62	0.67	-	Blue	X	0.10	0.15	0.20	-	White	Y	0.01	0.06	0.11	-				0.27	0.32	0.37	-					0.29	0.34	0.39	-
Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks																																																																																																																		
Brightness of White	-	$\theta = 0^\circ, \theta = 0^\circ$	560	700	-	cd/m <sup>2</sup>	Note 1																																																																																																																		
Brightness Uniformity	-	$\theta = 0^\circ, \theta = 0^\circ$ , Isc= 385 mA	70	-	-	%	Note 2,3																																																																																																																		
Contrast Ratio	CR	$\theta = 0^\circ, \theta = 0^\circ$	500	800	-	-	Note 4																																																																																																																		
Response Time (Rising + Falling)	T <sub>r</sub> + T <sub>f</sub>	$\theta = 0^\circ, \theta = 0^\circ$	-	23	-	ms	Note 5																																																																																																																		
Viewing Angle	$\theta_x$	$\theta = 0^\circ, CR \geq 10$	-	85	-	-	Degree Note 6																																																																																																																		
	$\theta_y$	$\theta = 180^\circ, CR \geq 10$	-	85	-	-																																																																																																																			
	$\theta_z$	$\theta = 90^\circ, CR \geq 10$	-	85	-	-																																																																																																																			
	$\theta_{xy}$	$\theta = 270^\circ, CR \geq 10$	-	85	-	-																																																																																																																			
Color Chromaticity	Red	X	0.60	0.65	0.70	-	Note 7																																																																																																																		
	Y	Y	0.27	0.30	0.35	-																																																																																																																			
	Green	X	0.26	0.33	0.36	-																																																																																																																			
	Y	Y	0.57	0.62	0.67	-																																																																																																																			
	Blue	X	0.10	0.15	0.20	-																																																																																																																			
	White	Y	0.01	0.06	0.11	-																																																																																																																			
			0.27	0.32	0.37	-																																																																																																																			
			0.29	0.34	0.39	-																																																																																																																			
7B64PS 2707 – TX18D200VM0EAA-3 Page 7-1/1	7. BLOCK DIAGRAM Revised																																																																																																																								
7B64PS 2708 – TX18D200VM0EAA-3 Page 8-1/1	8. RELIABILITY TESTS Revised																																																																																																																								

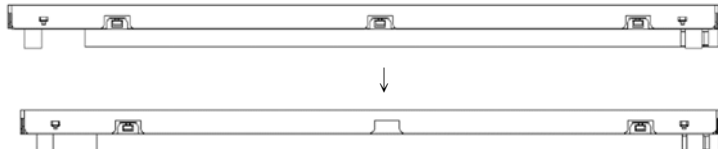DATE	SHEET No.	SUMMARY																																																																																								
Nov.12,'24	7B64PS 2709 – TX18D200VM0EAA-3 Page 9-3/7	9.4 TIMING CHART Fig. 9.1 Horizontal Timing Revised Fig. 9.3 Setup & Hold Time Delete																																																																																								
	7B64PS 2709 – TX18D200VM0EAA-3 Page 9-4/7	9.5 TIMING TABLE Revised A. DE MODE Horizontal CLK Frequency Max. 160 → 150 A. DE MODE Horizontal Cycle Time Max. 2320 → 2248																																																																																								
	7B64PS 2709 – TX18D200VM0EAA-3 Page 9-5/7	9.6 LVDS RECEIVER TIMING Revised <table><tr><th>Item</th><th>Symbol</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th></tr><tr><td>CLK</td><td>Cycle frequency</td><td>1/t<sub>CLK</sub></td><td>135.3</td><td>148.5</td><td>160</td></tr><tr><td rowspan="6">RinX (X=0,1,2,3)</td><td>0 data position</td><td>1/7* t<sub>CLK</sub> -0.49</td><td>1/7* t<sub>CLK</sub></td><td>1/7* t<sub>CLK</sub> +0.49</td><td rowspan="6">ns</td></tr><tr><td>1st data position</td><td>-0.49</td><td>0</td><td>+0.49</td></tr><tr><td>2nd data position</td><td>6/7* t<sub>CLK</sub> -0.49</td><td>6/7* t<sub>CLK</sub></td><td>6/7* t<sub>CLK</sub> +0.49</td></tr><tr><td>3rd data position</td><td>5/7* t<sub>CLK</sub> -0.49</td><td>5/7* t<sub>CLK</sub></td><td>5/7* t<sub>CLK</sub> +0.49</td></tr><tr><td>4th data position</td><td>4/7* t<sub>CLK</sub> -0.49</td><td>4/7* t<sub>CLK</sub></td><td>4/7* t<sub>CLK</sub> +0.49</td></tr><tr><td>5th data position</td><td>3/7* t<sub>CLK</sub> -0.49</td><td>3/7* t<sub>CLK</sub></td><td>3/7* t<sub>CLK</sub> +0.49</td></tr><tr><td>6th data position</td><td>2/7* t<sub>CLK</sub> -0.49</td><td>2/7* t<sub>CLK</sub></td><td>2/7* t<sub>CLK</sub> +0.49</td><td></td><td></td></tr></table> <div>↓</div> <table><tr><th>Item</th><th>Symbol</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th></tr><tr><td>CLK</td><td>Cycle frequency</td><td>1/t<sub>CLK</sub></td><td>135.3</td><td>148.5</td><td>150</td></tr><tr><td rowspan="6">RinX (X=0,1,2,3)</td><td>0 data position</td><td>1/7* t<sub>CLK</sub> -0.17</td><td>1/7* t<sub>CLK</sub></td><td>1/7* t<sub>CLK</sub> +0.17</td><td rowspan="6">ns</td></tr><tr><td>1st data position</td><td>-0.17</td><td>0</td><td>+0.17</td></tr><tr><td>2nd data position</td><td>6/7* t<sub>CLK</sub> -0.17</td><td>6/7* t<sub>CLK</sub></td><td>6/7* t<sub>CLK</sub> +0.17</td></tr><tr><td>3rd data position</td><td>5/7* t<sub>CLK</sub> -0.17</td><td>5/7* t<sub>CLK</sub></td><td>5/7* t<sub>CLK</sub> +0.17</td></tr><tr><td>4th data position</td><td>4/7* t<sub>CLK</sub> -0.17</td><td>4/7* t<sub>CLK</sub></td><td>4/7* t<sub>CLK</sub> +0.17</td></tr><tr><td>5th data position</td><td>3/7* t<sub>CLK</sub> -0.17</td><td>3/7* t<sub>CLK</sub></td><td>3/7* t<sub>CLK</sub> +0.17</td></tr><tr><td>6th data position</td><td>2/7* t<sub>CLK</sub> -0.17</td><td>2/7* t<sub>CLK</sub></td><td>2/7* t<sub>CLK</sub> +0.17</td><td></td><td></td></tr></table>	Item	Symbol	Min.	Typ.	Max.	Unit	CLK	Cycle frequency	1/t <sub>CLK</sub>	135.3	148.5	160	RinX (X=0,1,2,3)	0 data position	1/7* t <sub>CLK</sub> -0.49	1/7* t <sub>CLK</sub>	1/7* t <sub>CLK</sub> +0.49	ns	1st data position	-0.49	0	+0.49	2nd data position	6/7* t <sub>CLK</sub> -0.49	6/7* t <sub>CLK</sub>	6/7* t <sub>CLK</sub> +0.49	3rd data position	5/7* t <sub>CLK</sub> -0.49	5/7* t <sub>CLK</sub>	5/7* t <sub>CLK</sub> +0.49	4th data position	4/7* t <sub>CLK</sub> -0.49	4/7* t <sub>CLK</sub>	4/7* t <sub>CLK</sub> +0.49	5th data position	3/7* t <sub>CLK</sub> -0.49	3/7* t <sub>CLK</sub>	3/7* t <sub>CLK</sub> +0.49	6th data position	2/7* t <sub>CLK</sub> -0.49	2/7* t <sub>CLK</sub>	2/7* t <sub>CLK</sub> +0.49			Item	Symbol	Min.	Typ.	Max.	Unit	CLK	Cycle frequency	1/t <sub>CLK</sub>	135.3	148.5	150	RinX (X=0,1,2,3)	0 data position	1/7* t <sub>CLK</sub> -0.17	1/7* t <sub>CLK</sub>	1/7* t <sub>CLK</sub> +0.17	ns	1st data position	-0.17	0	+0.17	2nd data position	6/7* t <sub>CLK</sub> -0.17	6/7* t <sub>CLK</sub>	6/7* t <sub>CLK</sub> +0.17	3rd data position	5/7* t <sub>CLK</sub> -0.17	5/7* t <sub>CLK</sub>	5/7* t <sub>CLK</sub> +0.17	4th data position	4/7* t <sub>CLK</sub> -0.17	4/7* t <sub>CLK</sub>	4/7* t <sub>CLK</sub> +0.17	5th data position	3/7* t <sub>CLK</sub> -0.17	3/7* t <sub>CLK</sub>	3/7* t <sub>CLK</sub> +0.17	6th data position	2/7* t <sub>CLK</sub> -0.17	2/7* t <sub>CLK</sub>	2/7* t <sub>CLK</sub> +0.17		
	Item	Symbol	Min.	Typ.	Max.	Unit																																																																																				
	CLK	Cycle frequency	1/t <sub>CLK</sub>	135.3	148.5	160																																																																																				
RinX (X=0,1,2,3)	0 data position	1/7* t <sub>CLK</sub> -0.49	1/7* t <sub>CLK</sub>	1/7* t <sub>CLK</sub> +0.49	ns																																																																																					
	1st data position	-0.49	0	+0.49																																																																																						
	2nd data position	6/7* t <sub>CLK</sub> -0.49	6/7* t <sub>CLK</sub>	6/7* t <sub>CLK</sub> +0.49																																																																																						
	3rd data position	5/7* t <sub>CLK</sub> -0.49	5/7* t <sub>CLK</sub>	5/7* t <sub>CLK</sub> +0.49																																																																																						
	4th data position	4/7* t <sub>CLK</sub> -0.49	4/7* t <sub>CLK</sub>	4/7* t <sub>CLK</sub> +0.49																																																																																						
	5th data position	3/7* t <sub>CLK</sub> -0.49	3/7* t <sub>CLK</sub>	3/7* t <sub>CLK</sub> +0.49																																																																																						
6th data position	2/7* t <sub>CLK</sub> -0.49	2/7* t <sub>CLK</sub>	2/7* t <sub>CLK</sub> +0.49																																																																																							
Item	Symbol	Min.	Typ.	Max.	Unit																																																																																					
CLK	Cycle frequency	1/t <sub>CLK</sub>	135.3	148.5	150																																																																																					
RinX (X=0,1,2,3)	0 data position	1/7* t <sub>CLK</sub> -0.17	1/7* t <sub>CLK</sub>	1/7* t <sub>CLK</sub> +0.17	ns																																																																																					
	1st data position	-0.17	0	+0.17																																																																																						
	2nd data position	6/7* t <sub>CLK</sub> -0.17	6/7* t <sub>CLK</sub>	6/7* t <sub>CLK</sub> +0.17																																																																																						
	3rd data position	5/7* t <sub>CLK</sub> -0.17	5/7* t <sub>CLK</sub>	5/7* t <sub>CLK</sub> +0.17																																																																																						
	4th data position	4/7* t <sub>CLK</sub> -0.17	4/7* t <sub>CLK</sub>	4/7* t <sub>CLK</sub> +0.17																																																																																						
	5th data position	3/7* t <sub>CLK</sub> -0.17	3/7* t <sub>CLK</sub>	3/7* t <sub>CLK</sub> +0.17																																																																																						
6th data position	2/7* t <sub>CLK</sub> -0.17	2/7* t <sub>CLK</sub>	2/7* t <sub>CLK</sub> +0.17																																																																																							
7B64PS 2710- TX18D200VM0EAA-3 Page 10-1/2	10.1 FRONT VIEW Revised 																																																																																									
7B64PS 2711- TX18D200VM0EAA-3 Page 11-2/3	11.2 LCD APPEARANCE SPECIFICATION Revised <table><tr><th rowspan="5">Dot-Defect (Note 1)</th><th>Type</th><th>Maximum number</th></tr><tr><td>1 dot</td><td>4</td></tr><tr><td>2 adjacent dot</td><td>1</td></tr><tr><td>3 adjacent dot or above</td><td>Not allowed</td></tr><tr><td>Density</td><td>2(φ 20mm)</td></tr><tr><td rowspan="5">Dark dot-defect (Note 1)</td><td>1 dot</td><td>5</td></tr><tr><td>2 adjacent dot</td><td>2</td></tr><tr><td>3 adjacent dot or above</td><td>Not allowed</td></tr><tr><td>Density</td><td>3(φ 20mm)</td></tr><tr><td>In total</td><td>10</td></tr></table> → <table><tr><th rowspan="5">Dot-Defect (Note 1)</th><th>Type</th><th>Maximum number</th></tr><tr><td>Bright dot-defect</td><td>1 dot</td></tr><tr><td>1 dot</td><td>5</td></tr><tr><td>2 adjacent dot</td><td>2</td></tr><tr><td>3 adjacent dot or above</td><td>Not allowed</td></tr><tr><td rowspan="3">Dark dot-defect (Note 1)</td><td>Density</td><td>3(φ 20mm)</td></tr><tr><td>In total</td><td>5</td></tr></table>	Dot-Defect (Note 1)	Type	Maximum number	1 dot	4	2 adjacent dot	1	3 adjacent dot or above	Not allowed	Density	2(φ 20mm)	Dark dot-defect (Note 1)	1 dot	5	2 adjacent dot	2	3 adjacent dot or above	Not allowed	Density	3(φ 20mm)	In total	10	Dot-Defect (Note 1)	Type	Maximum number	Bright dot-defect	1 dot	1 dot	5	2 adjacent dot	2	3 adjacent dot or above	Not allowed	Dark dot-defect (Note 1)	Density	3(φ 20mm)	In total	5																																																			
Dot-Defect (Note 1)	Type		Maximum number																																																																																							
	1 dot		4																																																																																							
	2 adjacent dot		1																																																																																							
	3 adjacent dot or above		Not allowed																																																																																							
	Density	2(φ 20mm)																																																																																								
Dark dot-defect (Note 1)	1 dot	5																																																																																								
	2 adjacent dot	2																																																																																								
	3 adjacent dot or above	Not allowed																																																																																								
	Density	3(φ 20mm)																																																																																								
	In total	10																																																																																								
Dot-Defect (Note 1)	Type	Maximum number																																																																																								
	Bright dot-defect	1 dot																																																																																								
	1 dot	5																																																																																								
	2 adjacent dot	2																																																																																								
	3 adjacent dot or above	Not allowed																																																																																								
Dark dot-defect (Note 1)	Density	3(φ 20mm)																																																																																								
	In total	5																																																																																								
	7B64PS 2711 – TX18D200VM0EAA-3 Page 11-3/3	11.2 LCD APPEARANCE SPECIFICATION Revised Note 1																																																																																								
7B64PS 2712 – TX18D200VM0EAA-3 Page 12-1/2	12.2 PRECAUTIONS of HANDLING Revised 4) 、 5)																																																																																									
7B64PS 2713 – TX18D200VM0EAA-3 Page 13-1/1	13. DESIGNATION OF LOT MARK Added : <table><tr><th>REV. No</th><th>ITEM</th><th>REMARKS</th></tr><tr><td>B</td><td>Driver ICs and LCD changed</td><td>PCN 1077</td></tr></table>	REV. No	ITEM	REMARKS	B	Driver ICs and LCD changed	PCN 1077																																																																																			
REV. No	ITEM	REMARKS																																																																																								
B	Driver ICs and LCD changed	PCN 1077																																																																																								

## 3. GENERAL DATA

### 3.1 DISPLAY FEATURES

This module is a 7" FHD of 16:9 format LTPS TFT. The pixel format is vertical stripe and sub pixels are arranged as R (red), G (green), B (blue) sequentially. This display is RoHS compliant, COG (chip on glass) technology and LED backlight are applied on this display.

Part Name	TX18D200VM0EAA
Module Dimensions	169.0(W) mm x 104.0(H) mm x 10.0 (D) mm typ.
LCD Active Area	155.52(W) mm x 87.48(H) mm
Pixel Pitch	0.081(W) mm x 0.081 (H) mm
Resolution	1920 x 3(RGB)(W) x 1080(H) dots
Color Pixel Arrangement	R, G, B Vertical Stripe
LCD Type	Transmissive Color TFT; Normally Black
Display Type	Active Matrix
Number of Colors	16.7M Colors
Backlight	3 LEDs Series x 10 Parallel (30 LEDs in Total)
Weight	180 typ. (g)
Interface	LVDS; 20 pins
Power Supply Voltage	3.3V for LCD; 12V for Backlight
Power Consumption	0.84W for LCD; 7.14W for Backlight
Viewing Direction	Super Wide Version (In-Plane Switching)

## 4. ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit	Remarks
Supply Voltage	V <sub>DD</sub>	-0.3	4.0	V	-
Input Voltage of Logic	V <sub>I</sub>	-0.3	V <sub>DD</sub> +0.3	V	Note 1
Operating Temperature	T <sub>op</sub>	-40	85	°C	Note 2
Storage Temperature	T <sub>st</sub>	-40	90	°C	Note 2
Backlight Input Voltage	V <sub>LED</sub>	-	15	V	-

Note 1: The rating is defined for the signal voltages of the interface such as CLK and pixel data pairs.

Note 2: The maximum rating is defined as above based on the chamber temperature, which might be different from ambient temperature after assembling the panel into the application. Moreover, some temperature-related phenomenon as below needed to be noticed:

- Background color, contrast and response time would be different in temperatures other than 25°C.
- Operating under high temperature will shorten LED lifetime.

## 5. ELECTRICAL CHARACTERISTICS


### 5.1 LCD CHARACTERISTICS

$T_a = 25\text{ }^{\circ}\text{C}$ ,  $V_{SS} = 0\text{V}$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	$V_{DD}$	-	3.0	3.3	3.6	V	-
Differential Input Voltage for LVDS Receiver Threshold	$V_I$	"H" level	-	-	+100	mV	Note 1
		"L" level	-100	-	-		
Power Supply Current	$I_{DD}$	$V_{DD}=3.3\text{V}$	-	255	310	mA	Note 2
Vsync Frequency	$f_v$	-	-	60	-	Hz	Note 3
Hsync Frequency	$f_H$	-	66	67.5	68.1	KHz	
CLK Frequency	$f_{CLK}$	-	135.3	148.5	150	MHz	

Note 1:  $V_{CM}=+1.2\text{V}$

$V_{CM}$  is common mode voltage of LVDS transmitter/receiver.

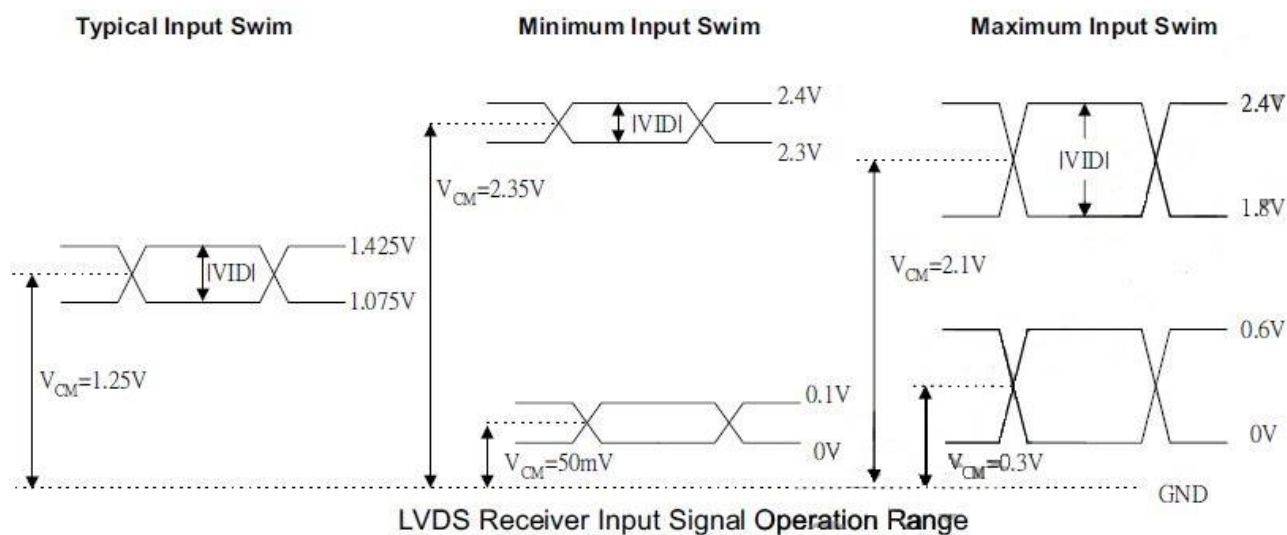

Note 2: An all white check pattern is used when measuring  $I_{DD}$ .  $f_v$  is set to 60 Hz.

Note 3: For LVDS transmitter input.

## 5.2 BACKLIGHT CHARACTERISTICS

$T_a = 25^{\circ}\text{C}$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks
LED Input Voltage	$V_{\text{LED}}$	-	11.7	12	12.3	V	Note1
LED Forward Current (Dim Control)	$I_{\text{LED}}$	0V; 0% duty	-	595	-	mA	Note 2
		3.3VDC; 100% duty	-	35	-		
LED lifetime	-	$I_{\text{LED}} = 595\text{ mA}$	-	70K	-	hrs	Note 3

Note 1: As Fig. 5.1 shown, LED current is constant, 595 mA, controlled by the LED driver when applying 12V.

Note 2: Dimming function can be obtained by applying DC voltage or PWM signal from the display interface CN1. The recommended PWM signal is 1K ~ 10K Hz with 3.3V amplitude.

Note 3: The estimated lifetime is specified as the time to reduce 50% brightness by applying 595 mA at  $25^{\circ}\text{C}$ .

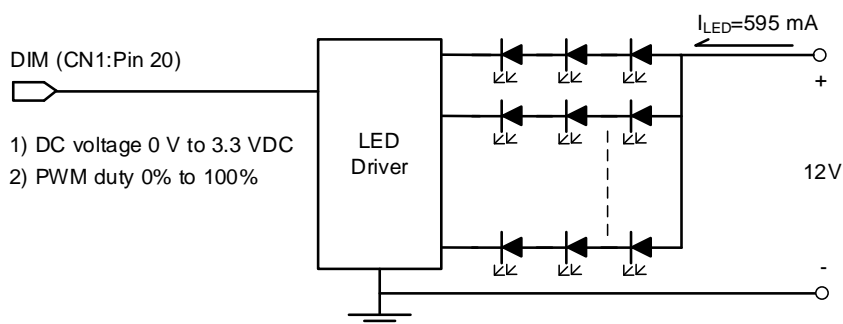


Fig 5.1

## 6. OPTICAL CHARACTERISTICS

The optical characteristics are measured based on the conditions as below:

- Supplying the signals and voltages defined in the section of electrical characteristics.
- The backlight unit needs to be turned on for 30 minutes.
- The ambient temperature is 25 °C .
- In the dark room around 100 lx, the equipment has been set for the measurements as shown in Fig 6.1.

$$T_a = 25\text{ }^{\circ}\text{C}, f_v = 60\text{ Hz}, V_{DD} = 3.3\text{V}$$

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks
Brightness of White		-	$\phi = 0^{\circ}, \theta = 0^{\circ}$ , I <sub>LED</sub> = 595 mA	960	1200	-	cd/m <sup>2</sup>	Note 1
Brightness Uniformity		-		70	-	-	%	Note 2,3
Contrast Ratio		CR		500	1300	-	-	Note 4
Response Time (Rising + Falling)		T <sub>r</sub> + T <sub>f</sub>	$\phi = 0^{\circ}, \theta = 0^{\circ}$	-	23	-	ms	Note 5
Viewing Angle		$\theta$ x	$\phi = 0^{\circ}$ , CR ≥ 10	-	85	-	Degree	Note 6
		$\theta$ x'	$\phi = 180^{\circ}$ , CR ≥ 10	-	85	-		
		$\theta$ y	$\phi = 90^{\circ}$ , CR ≥ 10	-	85	-		
		$\theta$ y'	$\phi = 270^{\circ}$ , CR ≥ 10	-	85	-		
Color Chromaticity	Red	X	$\phi = 0^{\circ}, \theta = 0^{\circ}$	0.63	0.68	0.73	-	Note 7
		Y		0.25	0.30	0.35		
	Green	X		0.24	0.29	0.34		
		Y		0.61	0.66	0.71		
	Blue	X		0.10	0.15	0.20		
		Y		0	0.05	0.10		
	White	X		0.25	0.30	0.35		
		Y		0.27	0.32	0.37		
NTSC Ratio	-	-	$\phi = 0^{\circ}, \theta = 0^{\circ}$	-	85	-	%	-

Note 1: The brightness is measured from the panel center point, P5 in Fig. 6.2, for the typical value.

Note 2: The brightness uniformity is calculated by the equation as below:

$$\text{Brightness uniformity} = \frac{\text{Min. Brightness}}{\text{Max. Brightness}} \times 100\%$$

, which is based on the brightness values of the 9 points measured by BM-5 as shown in Fig. 6.2.

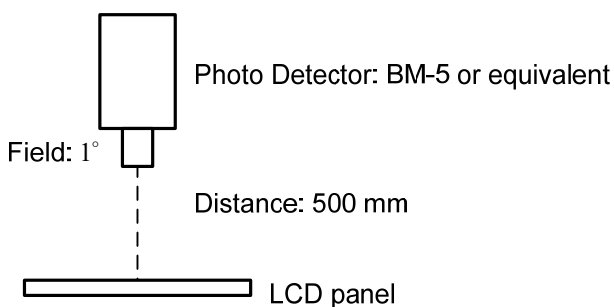


Fig. 6.1

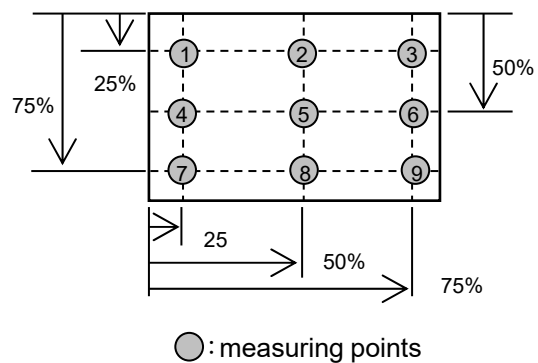


Fig. 6.2



Note 3: Continuously operating the test pattern (see below chess pattern Fig.6.3) on display for 2 hours at 25°C then switch to completely white pattern, the previous test pattern shall disappear within 2 seconds.

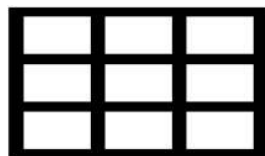


Fig.6.3

Note 4: The Contrast Ratio is measured from the center point of the panel, P5, and defined as the following equation:

$$CR = \frac{\text{Brightness of White}}{\text{Brightness of Black}}$$

Note 5: The definition of response time is shown in Fig. 6.4. The rising time is the period from 10% brightness to 90% brightness when the data is from black to white. Oppositely, Falling time is the period from 90% brightness falling to 10% brightness.

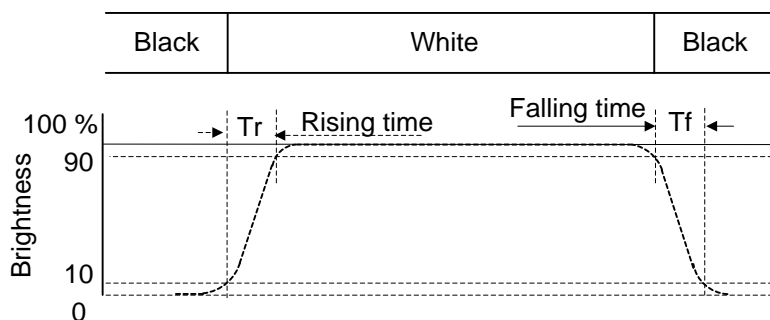


Fig.6.4

Note 6: The definition of viewing angle is shown in Fig. 6.5. Angle  $\phi$  is used to represent viewing directions, for instance,  $\phi = 270^\circ$  means 6 o'clock, and  $\phi = 0^\circ$  means 3 o'clock. Moreover, angle  $\theta$  is used to represent viewing angles from axis Z toward plane XY.

The display is super wide viewing angle version, so that the best optical performance can be obtained from every viewing direction.


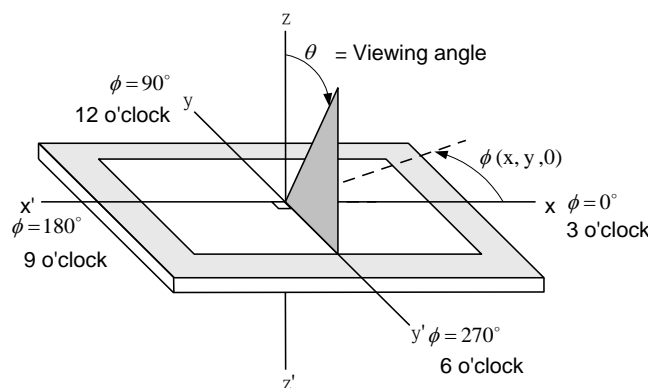


Fig 6.5

Note 7: The color chromaticity is measured from the center point of the panel, P5, as shown in Fig. 6.2.

7. BLOCK DIAGRAM

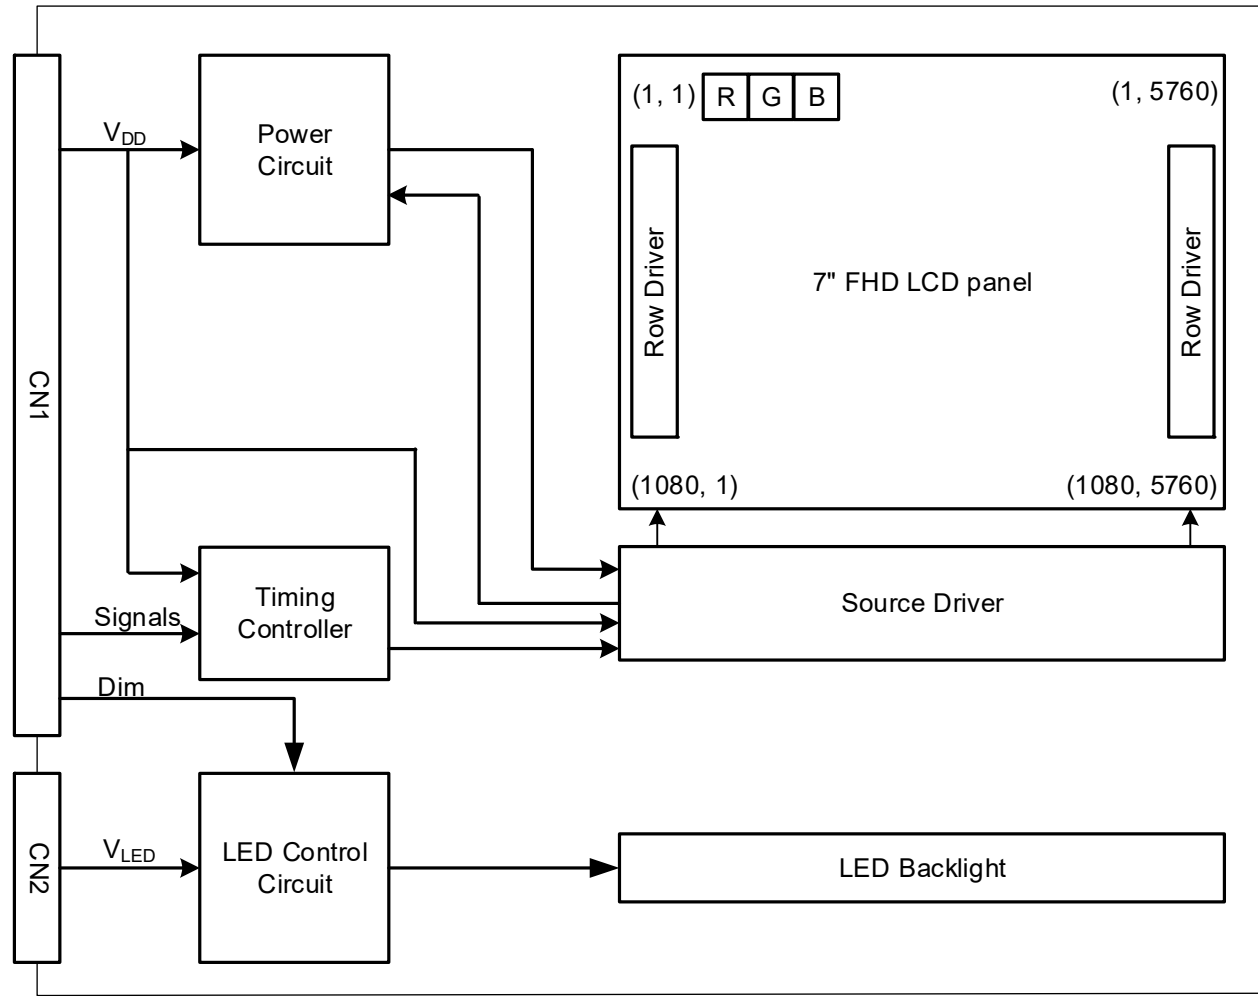

Note 1: Signals are CLK and pixel data pairs.

## 8. RELIABILITY TESTS

Test Item	Condition	
High Temperature	1) Operating 2) 85 °C	500 hrs
Low Temperature	1) Operating 2) -40 °C	500 hrs
High Temperature	1) Storage 2) 90 °C	500 hrs
Low Temperature	1) Storage 2) -40 °C	500 hrs
Heat Cycle	1) Operating 2) -40 °C ~85 °C 3) 3hrs~1hr~3hrs	500 hrs
Thermal Shock	1) Non-Operating 2) -40 °C ↔ 85 °C 3) 0.5 hr ↔ 0.5 hr	500 cycles
High Temperature & Humidity	1) Operating 2) 65 °C & 85%RH 3) Without condensation (Note4)	500 hrs
Vibration	1) Non-Operating 2) 10~200 Hz 3) 5G 4) X, Y, and Z directions	1 hr for each direction
Mechanical Shock	1) Non-Operating 2) 10 ms 3) 50G 4) ±X, ±Y and ±Z directions	Once for each direction
ESD	1) Operating 2) Tip: 150 pF, 330 Ω 3) Air discharge for glass: ± 12KV 4) Contact discharge for metal frame: ± 15KV	1) Glass: 9 points 2) Metal frame: 8 points (Note3)

Note 1: Display functionalities are inspected under the conditions defined in the specification after the reliability tests.

Note 2: The display is not guaranteed for use in corrosive gas environments.

Note 3: All pins of LCD interface (CN1) have been tested by ±100V contact discharge of ESD under non-operating condition.

Note 4: Under the condition of high temperature & humidity, if the temperature is higher than 65°C, the humidity needs to be reduced as Fig. 8.1 shown.

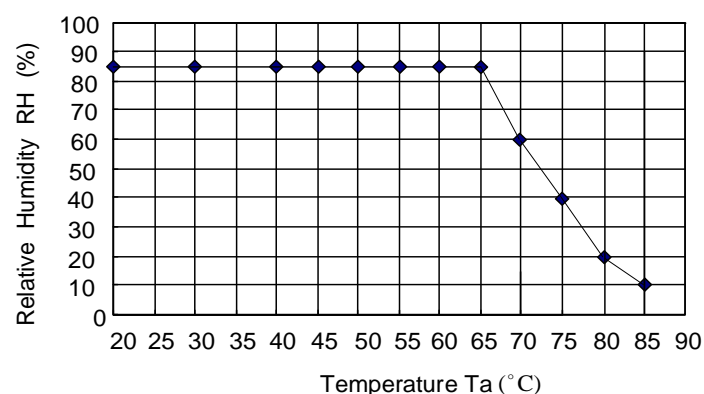


Fig. 8.1

## 9. LCD INTERFACE

### 9.1 INTERFACE PIN CONNECTIONS

The display interface connector (CN1) is FI-SEB20P-HF13E-E1500 made by JAE and pin assignment is as below:

Pin No.	Symbol	Signal	Pin No.	Symbol	Signal
1	V <sub>DD</sub>	Power Supply for Logic	11	IN2-	B2~B5, DE
2	V <sub>DD</sub>		12	IN2+	
3	V <sub>SS</sub>	GND	13	V <sub>SS</sub>	GND
4	V <sub>SS</sub>		14	CLK IN-	Pixel Clock
5	IN0-	R0~R5, G0	15	CLK IN+	
6	IN0+		16	V <sub>SS</sub>	GND
7	V <sub>SS</sub>	GND	17	IN3-	R6~R7, G6~G7, B6~B7
8	IN1-	G1~G5, B0~B1	18	IN3+	
9	IN1+		19	NC	No Connection
10	V <sub>SS</sub>	GND	20	DIM	Note 2


Note 1: IN n- and IN n+ (n=0, 1, 2, 3), CLK IN- and CLK IN+ should be wired by twist-pairs or side-by-side FPC patterns, respectively.

Note 2: Normal brightness: 0V or 0% PWM duty; Brightness control: 0V to 3.3V DC or 0% to 100% PWM duty.

The backlight connector (CN2) is SM02(8.0)B-BHS-1-TB(LF)(SN) made by JST, and pin assignment is as below:

Pin No.	Signal	Signal
1	V <sub>LED</sub>	12VDC
2	GND	Ground


## 9.2 LVDS INTERFACE

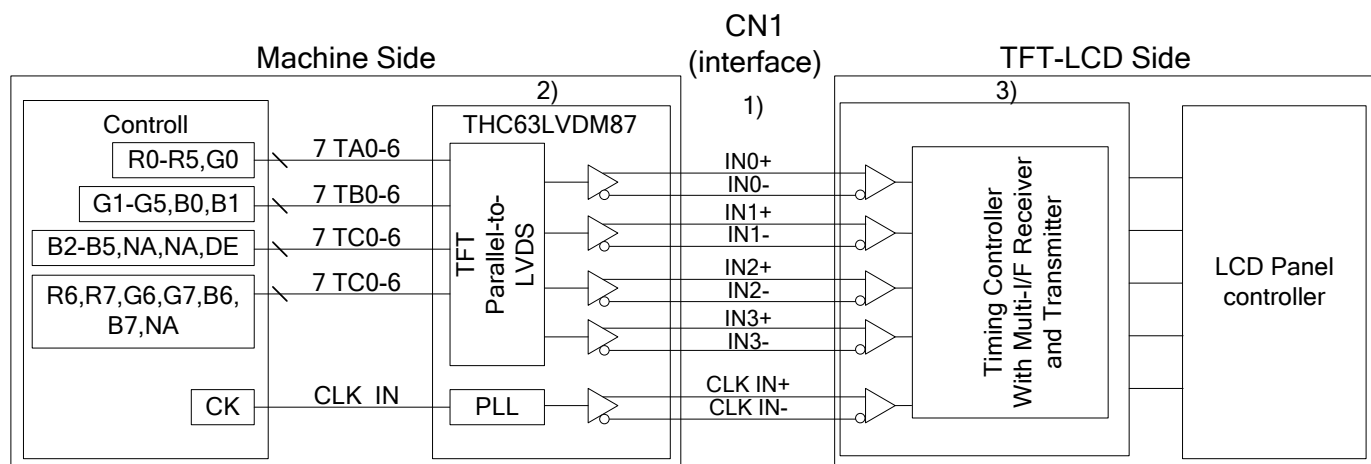

Note 1: LVDS cable impedance should be 100 ohms per signal line when each 2-lines (+, -) is used in differential mode.

Note 2: The recommended transmitter, THC63LVDM87, is made by Thine or equivalent, which is not contained in the module.

## 9.3 LVDS DATA FORMAT (VESA)

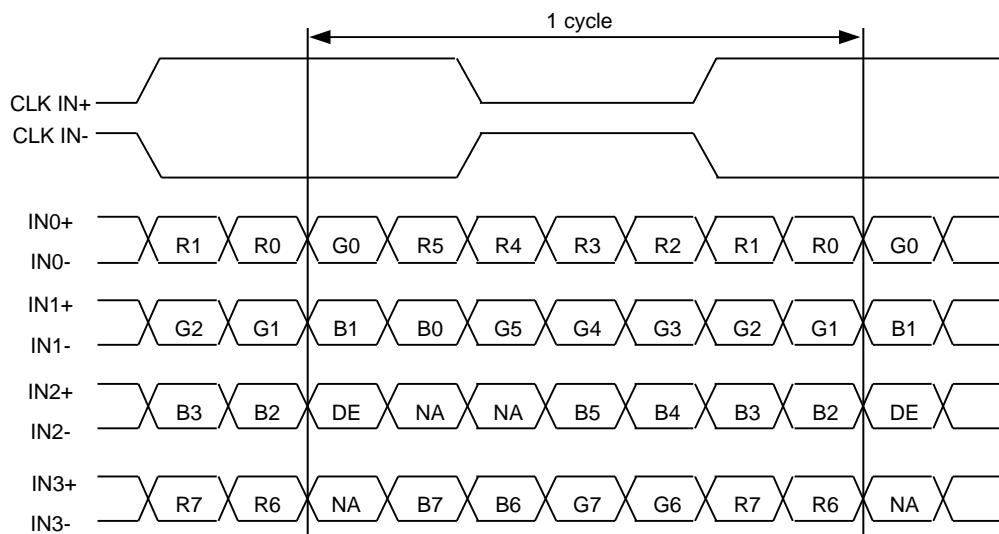

DE: Display Enable

NA: Not Available

9.4 TIMING CHART

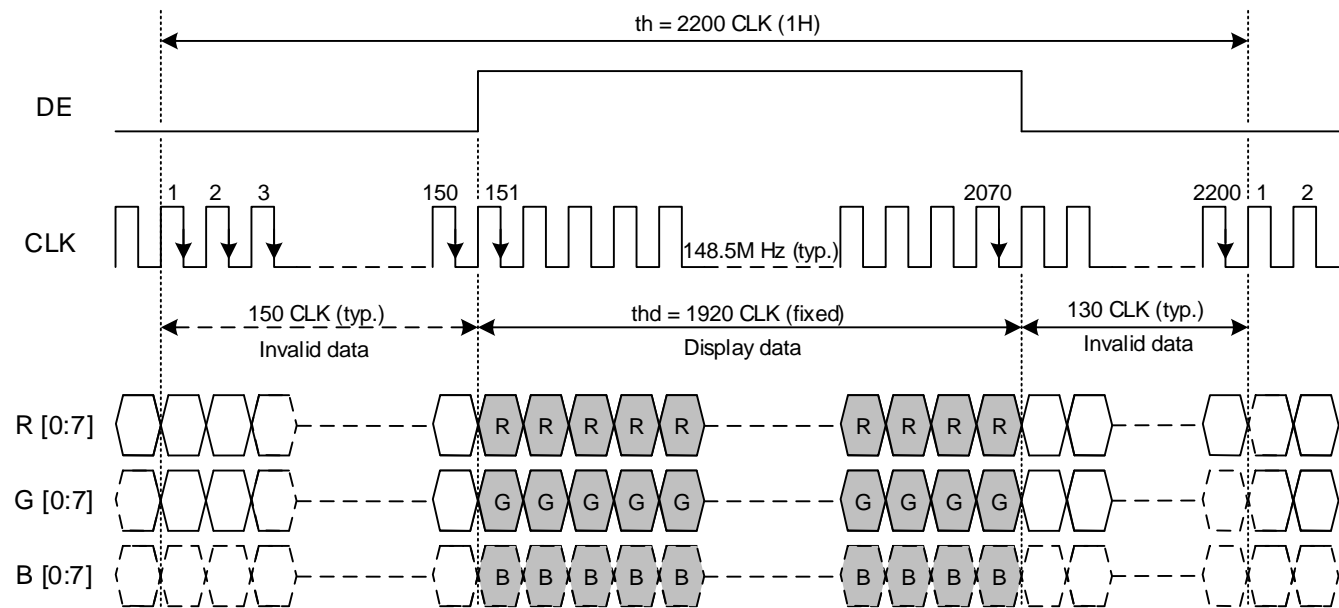


Fig. 9.1 Horizontal Timing

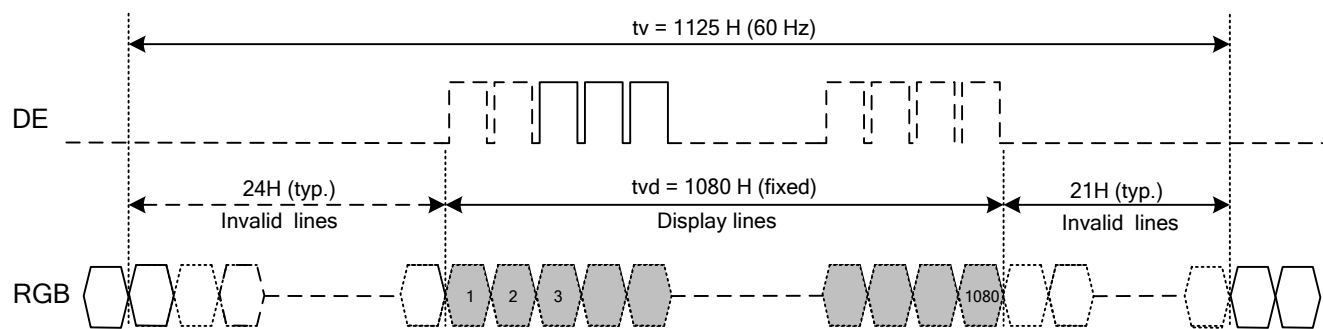


Fig. 9.2 Vertical Timing

## 9.5 TIMING TABLE

The column of timing sets including minimum, typical, and maximum as below are based on the best optical performance, frame frequency (Vsync) = 60Hz to define.


### A. DE MODE

Item		Symbol	Min.	Typ.	Max.	Unit
Horizontal	CLK Frequency	fclk	135.3	148.5	150	MHz
	Display Data	thd	1920			CLK
	Cycle Time	th	2050	2200	2248	
Vertical	Display Line	tvd	1080			H
	Cycle Time	tv	1100	1125	1150	

### B. CLOCK AND DATA INPUT TIMING

Item		Symbol	Min.	Typ.	Max.	Unit
CLK	Duty	Tcwh	47.5	50	52.5	%
	Cycle Time	Tcph	-	6.74	-	ns
Data	Setup Time	Tdsu	1	-	-	
	Hold Time	Tdhd	1	-	-	
DE	Setup Time	Tesu	1	-	-	
	Hold Time	Tehd	1	-	-	

## 9.6 LVDS RECEIVER TIMING

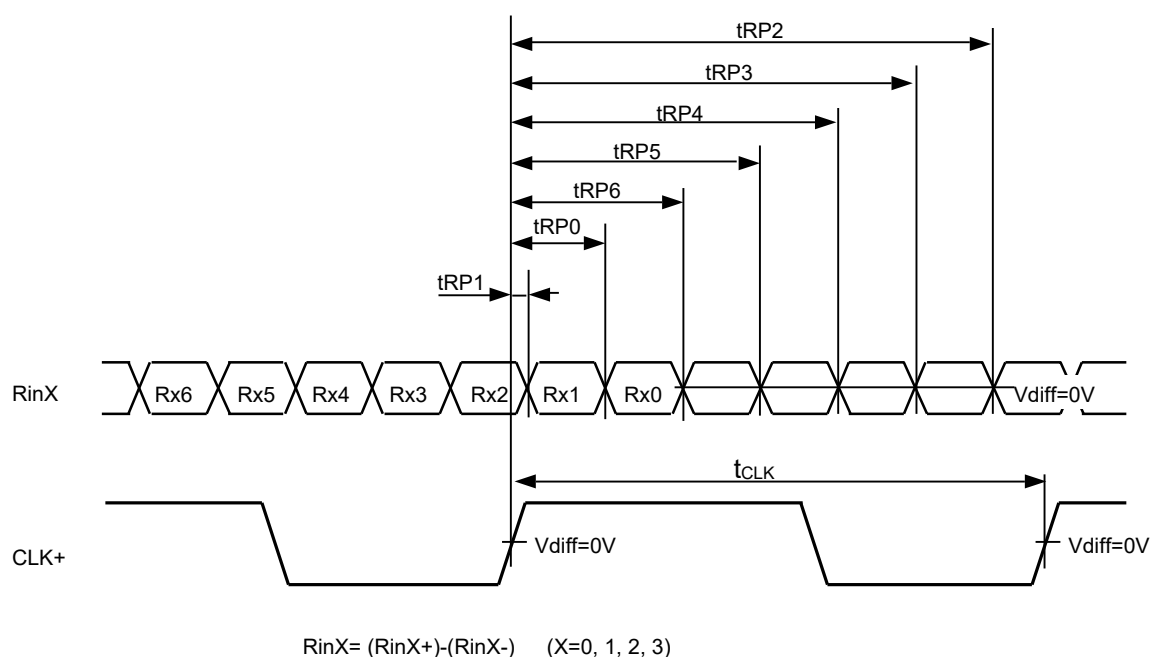

	Item	Symbol	Min.	Typ.	Max.	Unit
CLK	Cycle frequency	$1/t_{CLK}$	135.3	148.5	150	MHz
$R_{inX}$ ( $X=0,1,2,3$ )	0 data position	$t_{RP0}$	$1/7 * t_{CLK} - 0.17$	$1/7 * t_{CLK}$	$1/7 * t_{CLK} + 0.17$	ns
	1st data position	$t_{RP1}$	-0.17	0	+0.17	
	2nd data position	$t_{RP2}$	$6/7 * t_{CLK} - 0.17$	$6/7 * t_{CLK}$	$6/7 * t_{CLK} + 0.17$	
	3rd data position	$t_{RP3}$	$5/7 * t_{CLK} - 0.17$	$5/7 * t_{CLK}$	$5/7 * t_{CLK} + 0.17$	
	4th data position	$t_{RP4}$	$4/7 * t_{CLK} - 0.17$	$4/7 * t_{CLK}$	$4/7 * t_{CLK} + 0.17$	
	5th data position	$t_{RP5}$	$3/7 * t_{CLK} - 0.17$	$3/7 * t_{CLK}$	$3/7 * t_{CLK} + 0.17$	
	6th data position	$t_{RP6}$	$2/7 * t_{CLK} - 0.17$	$2/7 * t_{CLK}$	$2/7 * t_{CLK} + 0.17$	



## 9.7 POWER SEQUENCE

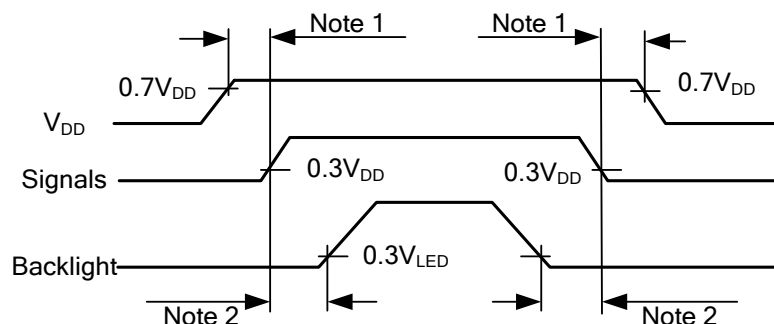


Fig. 9.4 Power Sequence Timing

Note 1: In order to avoid any damages,  $V_{DD}$  has to be applied before all other signals. The opposite is true for power off where  $V_{DD}$  has to be remained on until all other signals have been switch off. The recommended time period is 1 second.

Note 2: In order to avoid showing uncompleted patterns in transient state. It is recommended that switching the backlight on is delayed for 1 second after the signals have been applied. The opposite is true for power off where the backlight has to be switched off 1 second before the signals are removed.

## 9.8 DATA INPUT for DISPLAY COLOR


Input color		Red Data								Green Data								Blue Data							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
		MSB							LSB	MSB							LSB	MSB							LSB
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note 1: Definition of gray scale : Color(n) Number in parenthesis indicates gray scale level. Larger number corresponds to brighter level.

Note 2: Data Signal : 1 : High, 0 : Low

10. OUTLINE DIMENSIONS


10.1 FRONT VIEW

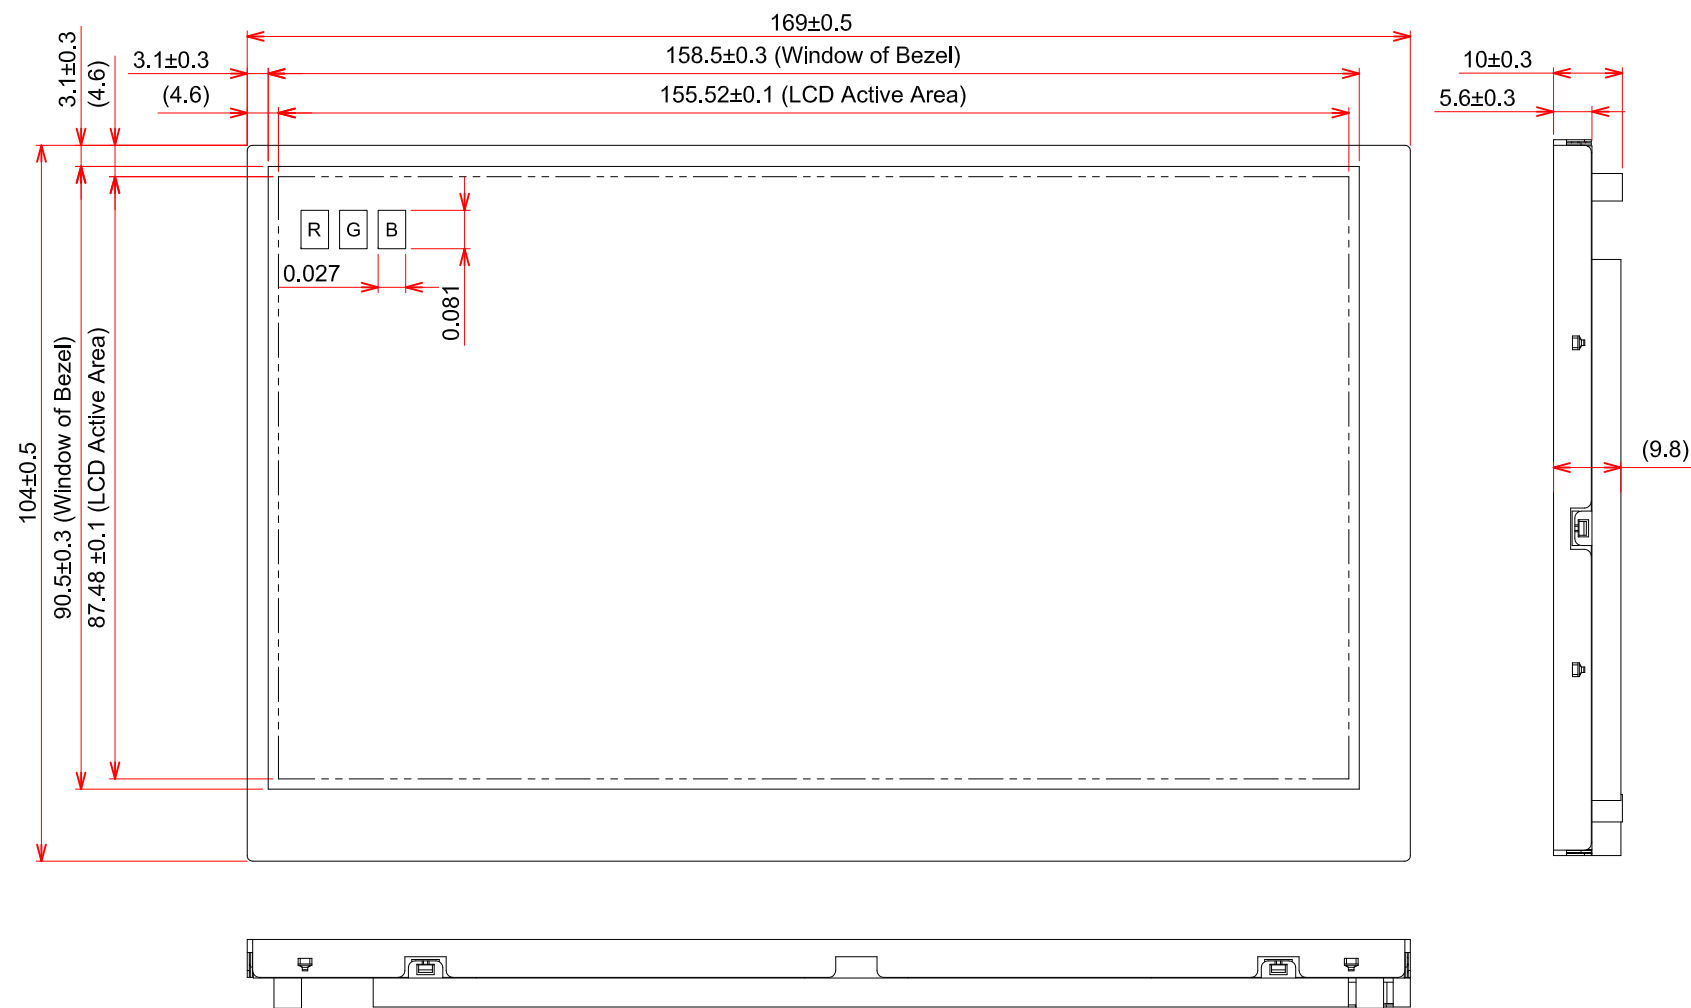

\*\* Undefined tolerance is  $\pm 0.5\text{mm}$

Scale : NTS  
Unit : mm

10.2 REAR VIEW

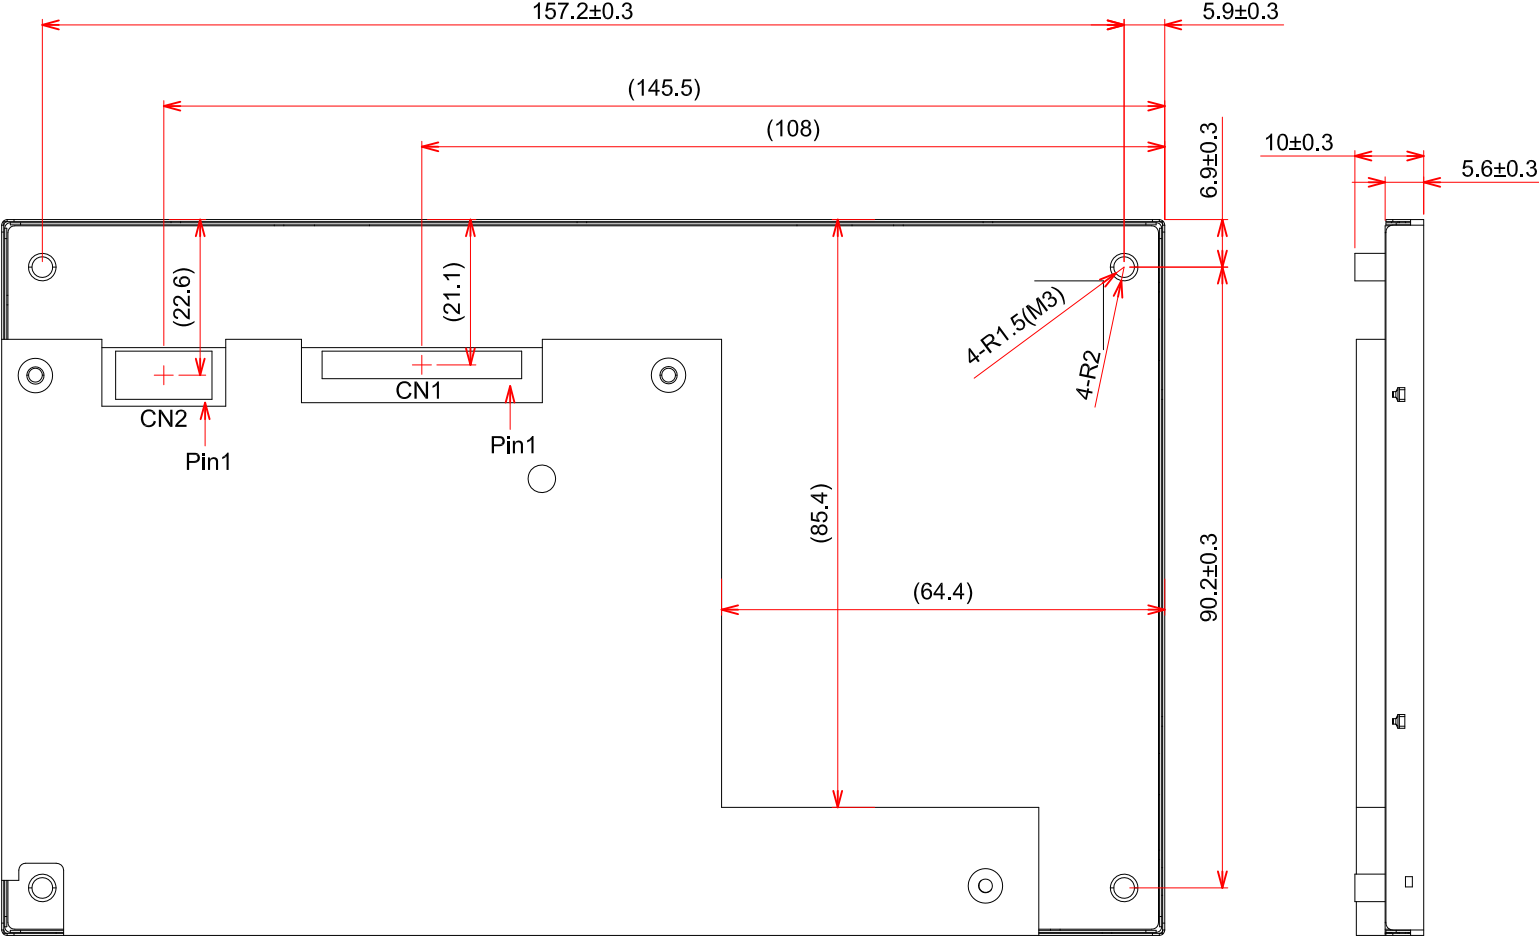

\*\* Undefined tolerance is ±0.5mm

Scale : NTS  
Unit : mm

## 11. APPEARANCE STANDARD

The appearance inspection is performed in a dark room around 500~1000 lx based on the conditions as below:

- The distance between inspector's eyes and display is 30 cm.
- The viewing zone is defined with angle  $\theta$  shown in Fig. 11. The inspection should be performed within  $45^\circ$  when display is shut down. The inspection should be performed within  $5^\circ$  when display is power on.

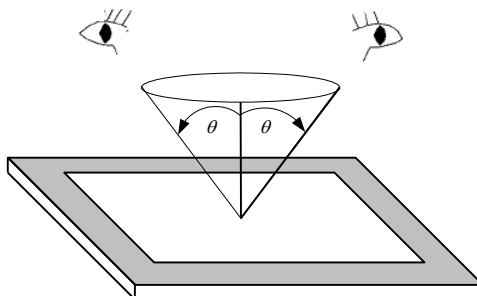


Fig. 11.1

### 11.1 THE DEFINITION OF LCD ZONE

LCD panel is divided into 3 areas as shown in Fig.11.2 for appearance specification in next section. A zone is the LCD active area (dot area); B zone is the area, which extended 1 mm out from LCD active area; C zone is the area between B zone and metal frame.

In terms of housing design, B zone is the recommended window area customers' housing should be located in.

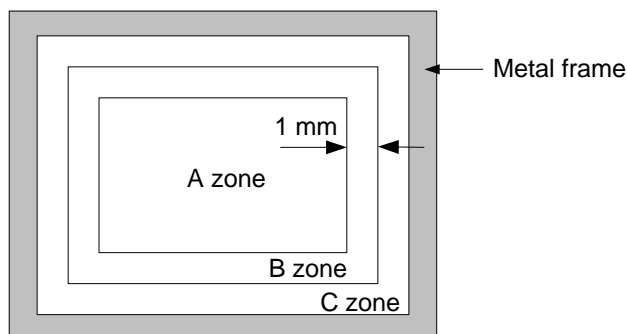


Fig. 11.2

## 11.2 LCD APPEARANCE SPECIFICATION

The specification as below is defined as the amount of unexpected phenomenon or material in different zones of LCD panel. The definitions of length, width and average diameter using in the table are shown in Fig. 11.3 and Fig. 11.4.

Item	Criteria				Applied zone
Scratches	Length (mm)	Width (mm)	Maximum number	Minimum space	A 、 B
	Ignored	$W\leq 0.01$	Ignored	-	
	$L\leq 40$	$W\leq 0.02$	10	-	
	$L\leq 20$	$W\leq 0.04$	10	-	
	Round (Dot Shape)				
	Average diameter (mm)		Maximum number	Minimum space	
	$D\leq 0.2$		Ignore	-	
	$D\leq 0.4$		10	-	
Dent	Serious one is not allowed				A
Wrinkles in polarizer	Serious one is not allowed				A
Bubbles on polarizer	Average diameter (mm)		Maximum number		A
	$D\leq 0.3$		Ignored		
	$0.3 < D\leq 0.5$		10		
	$0.5 < D\leq 1.0$		5		
1) Stains 2) Foreign Materials 3) Dark Spot	Filamentous (Line shape)				A 、 B
	Length (mm)	Width (mm)	Maximum number		
	Ignored	$W\leq 0.02$	Ignored		
	$L\leq 2.0$	$W\leq 0.03$	10		
	$L\leq 1.0$	$W\leq 0.06$	10		
	Round (Dot shape)				A 、 B
	Average diameter (mm)		Maximum number	Minimum Space	
	$D\leq 0.3$		Ignored	-	
	$0.3 < D\leq 0.5$		5	-	
	$D > 0.5$		0	-	
	In total		Filamentous + Round=10		
	Those wiped out easily are acceptable				
Dot-Defect (Note 1)		Type	Maximum number		A
	Bright dot-defect	1 dot	0		
	Dark dot-defect	1 dot	5		
		2 adjacent dot	2		
		3 adjacent dot or above	Not allowed		
		Density	3(φ 20mm)		
		In total	5		

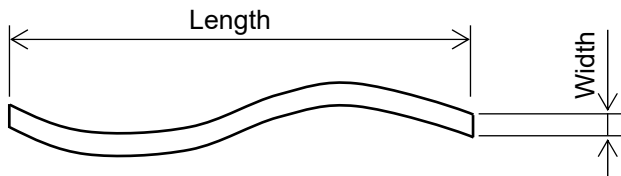


Fig 11.3

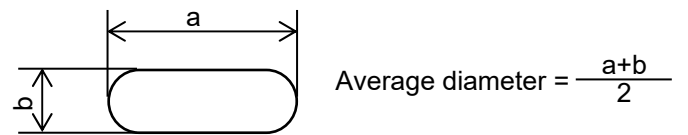


Fig 11.4

Note 1: The definitions of dot defect are as below:

- For bright dot-defect, showing black pattern, defect size over 1/2 dot area is defined.
- For dark dot-defect, showing white pattern, defect size over 1/2 dot area is defined.
- The definition of 1-dot-defect is the defect-dot, which is isolated and no adjacent defect-dot.
- The definition of adjacent dot is shown as Fig. 11.5.
- The Density of dot defect is defined in the area within diameter  $\phi = 20\text{mm}$ .

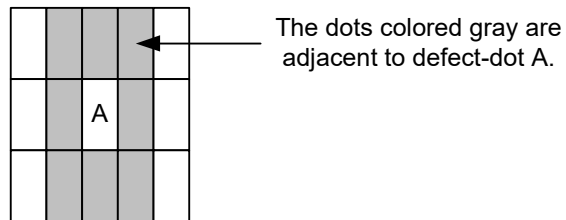


Fig. 11.5

## 12. PRECAUTIONS

### 12.1 PRECAUTIONS of ESD

- 1) Before handling the display, please ensure your body has been connected to ground to avoid any damages by ESD. Also, do not touch display's interface directly when assembling.
- 2) Please remove the protection film very slowly before turning on the display to avoid generating ESD.

### 12.2 PRECAUTIONS of HANDLING

- 1) In order to keep the appearance of display in good condition; please do not rub any surfaces of the displays by sharp tools harder than 3H, especially touch panel, metal frame and polarizer.
- 2) Please do not pile the displays in order to avoid any scars leaving on the display. In order to avoid any injuries, please pay more attention for the edges of glasses and metal frame, and wear finger cots to protect yourself and the display before working on it.
- 3) Touching the display area or the terminal pins with bare hand is prohibited. This is because it will stain the display area and cause poor insulation between terminal pins, and might affect display's electrical characteristics furthermore.
- 4) Do not use any harmful chemicals such as acetone and toluene to clean display's surfaces.
- 5) Please use soft cloth or absorbent cotton with ethanol or isopropyl alcohol to clean the display by gently wiping. Moreover, when wiping the display, please wipe it by horizontal or vertical direction instead of circling to prevent leaving scars on the display's surface, especially polarizer.
- 6) Please wipe any unknown liquids immediately such as saliva, water or dew on the display to avoid color fading or any permanently damages.
- 7) Maximum pressure to the surface of the display must be less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1 \text{ cm}^2$ , the maximum pressure must be less than 1.96N.

### 12.3 PRECAUTIONS of OPERATING

- 1) Please input signals and voltages to the displays according to the values defined in the section of electrical characteristics to obtain the best performance. Any voltages over than absolute maximum rating will cause permanent damages to this display. Also, any timing of the signals out of this specification would cause unexpected performance.
- 2) When the display is operating at significant low temperature, the response time will be slower than it at  $25^\circ\text{C}$ . In high temperature, the color will be slightly dark and blue compared to original pattern. However, these are temperature-related phenomenon of LCD and it will not cause permanent damages to the display when used within the operating temperature.
- 3) The use of screen saver or sleep mode is recommended when static images are likely for long periods of time. This is to avoid the possibility of image sticking.
- 4) Spike noise can cause malfunction of the circuit. The recommended limitation of spike noise is no bigger than  $\pm 100 \text{ mV}$ .



## 12.4 PRECAUTIONS of STORAGE

If the displays are going to be stored for years, please be aware the following notices.

- 1) Please store the displays in a dark room to avoid any damages from sunlight and other sources of UV light.
- 2) The recommended long-term storage temperature is between 10°C ~35°C and 55%~75% humidity to avoid causing bubbles between polarizer and LCD glasses, and polarizer peeling from LCD glasses.
- 3) It would be better to keep the displays in the container, which is shipped from JDI, and do not unpack it.
- 4) Please do not stick any labels on the display surface for a long time, especially on the polarizer.

## 12.5 PRECAUTIONS of IMAGE STICKING

- 1) Do not display the fixed image or very frequently repeated clips in a long period of time, it may cause image sticking on display. Even a video of several minutes, which is played in a loop, is considered as repetitive.
- 2) Screensaver or power saving mode is recommended to avoid image sticking effectively. Using moving images, scrolling text and alternating a fixed image with a moving image, are the ideal ways to reduce the possibility of image sticking.
- 3) Additionally, it is important to avoid using static bars at image boundaries. Typically, such bars are a result of difference in aspect ratio (e.g., playing 4:3 content on a 16:9 display).

## 13. DESIGNATION of LOT MARK

1) The lot mark is showing in Fig.13.1. First 4 digits are used to represent production lot, T represented product of JDI Taiwan, and the last 6 digits are the serial number.

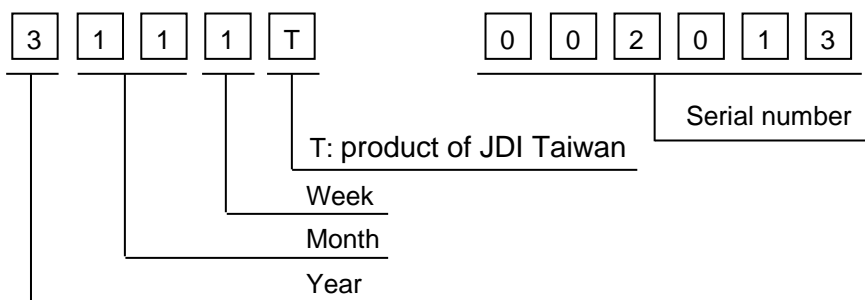


Fig. 13.1

2) The tables as below are showing what the first 4 digits of lot mark are shorted for.

Year	Lot Mark	Month	Lot Mark	Month	Lot Mark	Week	Lot Mark
2013	3	Jan.	01	Jul.	07	1~7 days	1
2014	4	Feb.	02	Aug.	08	8~14 days	2
2015	5	Mar.	03	Sep.	09	15~21 days	3
2016	6	Apr.	04	Oct.	10	22~28 days	4
2017	7	May	05	Nov.	11	29~31 days	5
		Jun.	06	Dec.	12		

3) Except letters I and O, revision number will be shown on lot mark and following letters A to Z.

REV.No	ITEM	REMARKS
A	-	-
B	Driver ICs and LCD changed	PCN 1077

4) The location 1of the lot mark is on the back of the display shown in Fig. 13.2.

Label example :



Fig. 13.2