



[Http://www.lcdfriends.com](http://www.lcdfriends.com)

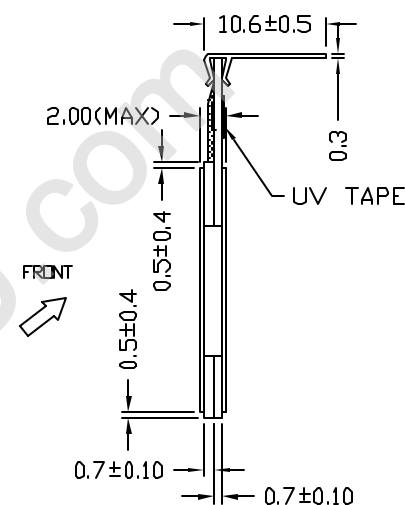

1	2	3	4	5	6	7	8	9	10	11	12	13	14
V _{SS}	V _{DD}	V _O	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7


DETAIL A:

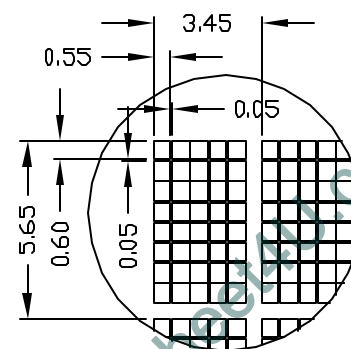

- ```


1. DISPLAY TYPE: TN MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: REFLECTIVE/POSITIVE
4. OPERATING TEMP: 0°C--+50°C
5. STORAGE TEMP: -20°C--+60°C
6. VDD: 5.0V
7. LCD OPERATING VOLTAGE: 4.3V
8. DRIVE METHOD: DUTY 1/16 BIAS 1/5
9. CONTROLLER: S6A0032X01-BOCY(KS0032UM-00CC)
10. ALL UNMARKED TOLERANCES: ±0.3mm
11. PIN CONNECTOR

```

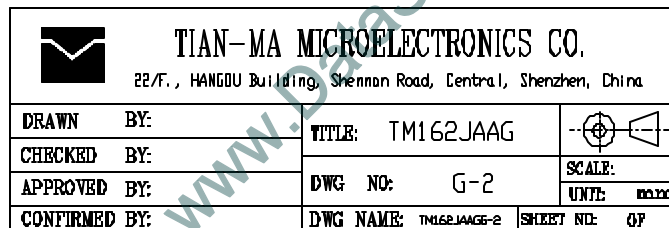

22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

BY: \_\_\_\_\_ TITLE: TM162JAAG



DWG NO: G-2

|           |             |
|-----------|-------------|
| DWG NAME: | TM16PJAGG-2 |
|-----------|-------------|

UNIT: MAY

ET NO OF