
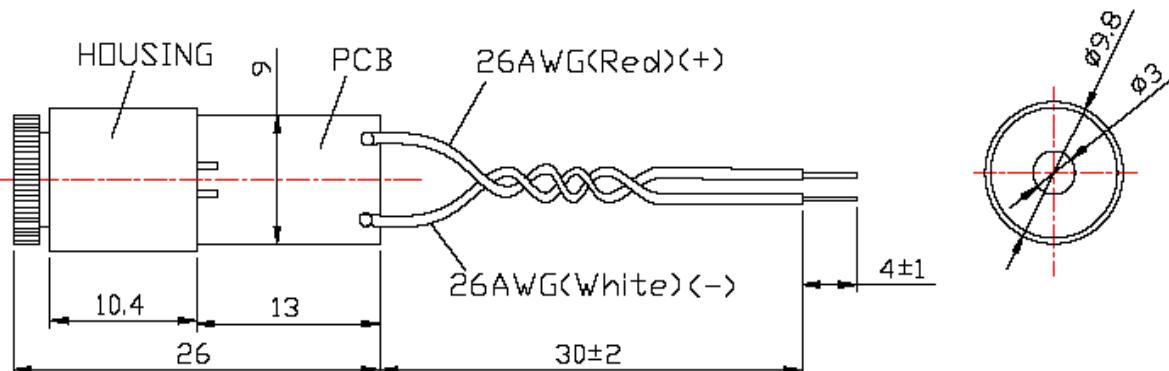


**880nm Laser Diode Module****880nm less 6mW dia 9.8mm Laser Diode Module (Class III b)****U-MD-88063**

■ Specifications : (Tc=25°C +/- 3°C)

Item	Characterization	Remark
Laser spot	Circle	
Applicable Lens	A plastic lens for each unit	
Wire	26 AWG PVC-Free	
Solder Material	NIHON GENMA SOLDER (Lead-Free)、TNP 303 YS RMA 0.8 mm & NP601 SZ 555 GK	
Body	Brass	

■ External dimensions : (Unit : mm)

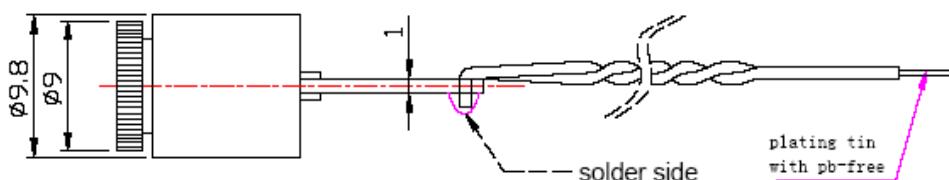

Default tolerance : +/- 0.5

Condition :

Parameter	Min.	Typ.	Max.	Unit	Remark
Storage Temperature and Humidity	-25	-	70	°C	Storage in 3 weeks
	40	-	95	Rh	
Operating Temperature and Humidity	0	-	40	°C	No Condense
	20	-	80	Rh	

友嘉科技股份有限公司  
桃園縣楊梅鎮3鄰高獅路156號

**UNION OPTRONICS CORP.**

No, 156 Kao-Shy Road Yang-Mei, Tao-Yuan, Taiwan, R.O.C.

TEL : 886-3-485-2687

FAX : 886-3-475-4378

E-mail : marketing@uocnet.com

Ver.1 2009/03

**880nm Laser Diode Module****■ Electrical and Optical Characteristics : (Tc=25°C +/- 3°C)**

Parameter	Min.	Typ.	Max.	Unit	Remark
Input power source	-	3.1	-	Volt	±10%
Consumption Current	-	25	40	mA	
Output power	4	-	6	mW	Class IIIb
Beam Dimension @3m	-	3.5 X 1.7 ( $\pm 0.5$ )	-	mm2	No ghost spot
Beam Dimension @6m	$\Phi 10$	-	$\Phi 15$	mm	
Wavelength	870	880	890	nm	
Life Time	-	10000	-	hrs	

\* Wire Definition : DC +3.1V -- Red color , GND -- White color

**■ Reliability test:**

Item	Characterization	Remark
Vibration test	Depend on customer	
Drop test	8 times at 1meter after packing	
Voltage test	2.6V ~ 3.5V	
Temperature test	0°C ~ 40°C	

**■ Precautions****■ Heat Sinking :**

If the case temperature of the laser diode exceeds its maximum specification, premature or catastrophic failure may occur. To ensure the maximum life of the laser diode, it is recommended that an additional electrically insulated heatsink, of at least 35sq.cm. be used. Thermal transfer cream can be used to improve contact and heat dissipation. Do not restrict air circulation around the device.

**■ Power Connections :**

The Compact laser diode modules require a regulated input voltage of 2.5-3.5V DC. Connections are made via the 2 pre-tinned external flying leads, (red is positive, white is negative).

WARNING: The housing is internally connected to the positive supply rail.

Specifications subject to change without notice.

**■ Laser Safety**

1. Do not look into the laser beam directly by eyes. The laser beam may cause severe damage to human eyes.
2. Optical Lens is made of plastic or glass . Do not contaminate lens by soiling, oil or chemical.