

Surface Mount Super Fast Recovery Rectifier




Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Super Fast reverse recovery time
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

For use in high frequency rectification of power, supplies, inverters, converters, and freewheeling diodes for consumer, and telecommunication.

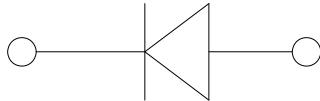

Mechanical Data

- **Package:** SMAF
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■ Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	U1AF	U1BF	U1CF	U1DF	U1FF	U1GF	U1HF	U1JF
Device marking code			U1AF	U1BF	U1CF	U1DF	U1FF	U1GF	U1HF	U1JF
Maximum Repetitive Peak Reverse Voltage	VRRM	V	50	100	150	200	300	400	500	600
Maximum RMS Voltage	VRMS	V	35	70	105	140	210	280	350	420
Maximum DC blocking Voltage	VDC	V	50	100	150	200	300	400	500	600
Average rectified output current @60Hz sine wave, resistance load, TL (Fig.1)	IO	A	1.0							
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, Tj=25°C	IFSM	A	30							
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25°C			60							
Current squared time @1ms≤t≤8.3ms Tj=25°C	i ² t	A ² s	3.735							
Storage temperature	Tstg	°C	-55 ~ +150							
Junction temperature	Tj	°C	-55 ~ +150							

■ Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	U1AF	U1BF	U1CF	U1DF	U1FF	U1GF	U1HF	U1JF
Maximum instantaneous forward voltage	VF	V	IFM=1.0A	0.92				1.25		1.7	
Maximum reverse recovery time	trr	ns	IF=0.5A, IR=1.0A, Irr=0.25A	25						35	
Maximum DC reverse current at rated DC blocking voltage	IR	µA	Tj =25°C	5.0							
			Tj =125°C	50							
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	17				15		16	



U1AF THRU U1JF

Dynamic Characteristics

◆ U1AF THRU U1DF

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$, $di/dt=-50\text{A/us}$ $V_{RM}=30\text{V}$	-	27	-
			$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=100\text{V}$	-	18	-
			$T_j=125^\circ\text{C}$		-	24	-
Peak recovery current	I_{RRM}	A	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=100\text{V}$	-	2.4	-
			$T_j=125^\circ\text{C}$		-	3.9	-
Reverse recovery charge	Q_{rr}	nC	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=100\text{V}$	-	21.6	-
			$T_j=125^\circ\text{C}$		-	46.6	-
Non-repetitive avalanche energy	E_{AS}	mJ	$T_j=25^\circ\text{C}$	$I_R=1.5\text{A}$, $L=15\text{mH}$	16.9	-	-

◆ U1FF THRU U1GF

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$, $di/dt=-50\text{A/us}$ $V_{RM}=30\text{V}$	-	26	-
			$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=200\text{V}$	-	22	-
			$T_j=125^\circ\text{C}$		-	31	-
Peak recovery current	I_{RRM}	A	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=200\text{V}$	-	1.9	-
			$T_j=125^\circ\text{C}$		-	3.5	-
Reverse recovery charge	Q_{rr}	nC	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=200\text{V}$	-	21.1	-
			$T_j=125^\circ\text{C}$		-	54.9	-
Non-repetitive avalanche energy	E_{AS}	mJ	$T_j=25^\circ\text{C}$	$I_R=0.4\text{A}$, $L=15\text{mH}$	1.2	-	-

◆ U1HF THRU U1JF

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$, $di/dt=-50\text{A/us}$ $V_{RM}=30\text{V}$	-	38	-
			$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=400\text{V}$	-	32	-
			$T_j=125^\circ\text{C}$		-	52	-
Peak recovery current	I_{RRM}	A	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=400\text{V}$	-	2.9	-
			$T_j=125^\circ\text{C}$		-	4.7	-
Reverse recovery charge	Q_{rr}	nC	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A/us}$ $V_{RM}=400\text{V}$	-	45.8	-
			$T_j=125^\circ\text{C}$		-	121.9	-
Non-repetitive avalanche energy	E_{AS}	mJ	$T_j=25^\circ\text{C}$	$I_R=0.3\text{A}$, $L=15\text{mH}$	0.7	-	-

Thermal Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	U1AF	U1BF	U1CF	U1DF	U1FF	U1GF	U1HF	U1JF
Typical Thermal resistance	$R_{\theta J-A}^{(1)}$	$^\circ\text{C/W}$	60							
	$R_{\theta J-L}^{(1)}$		20							
	$R_{\theta J-C}^{(1)}$		18							

Note:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas



U1AF THRU U1JF

■ Characteristics (Typical)

FIG.1: Io-TL Cure

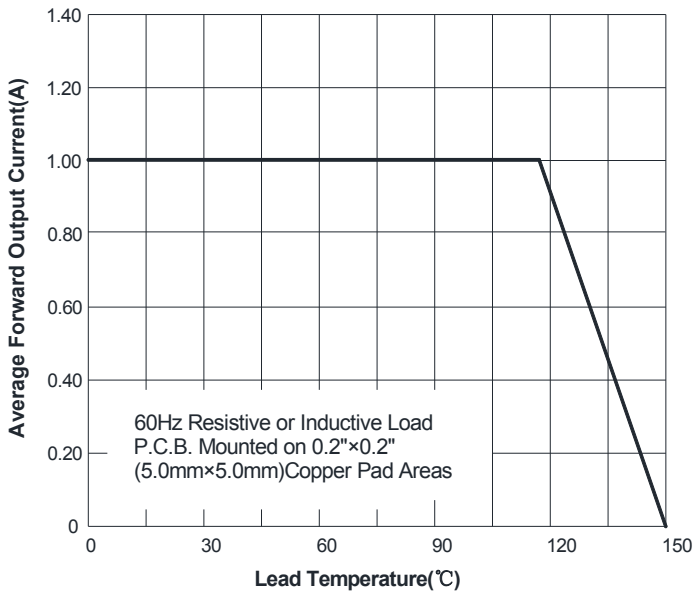


FIG.2: Forward Surge Current Capability

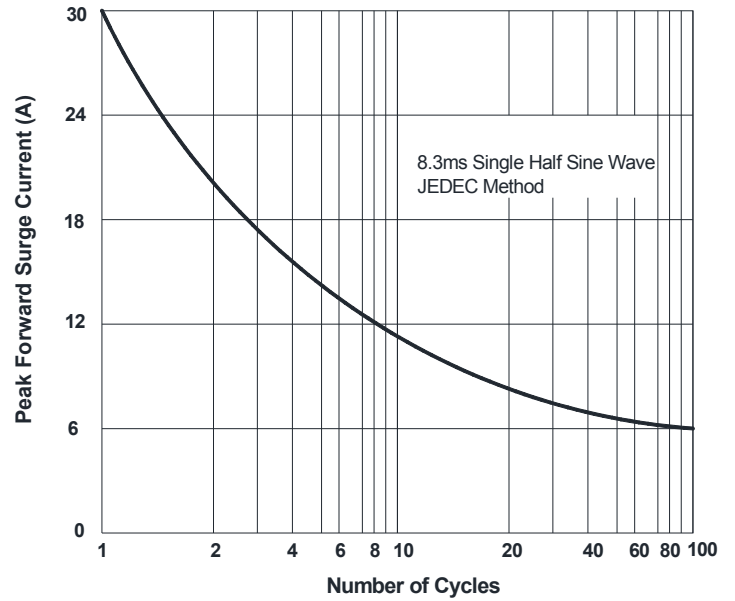


FIG.3: Typical Forward Characteristics

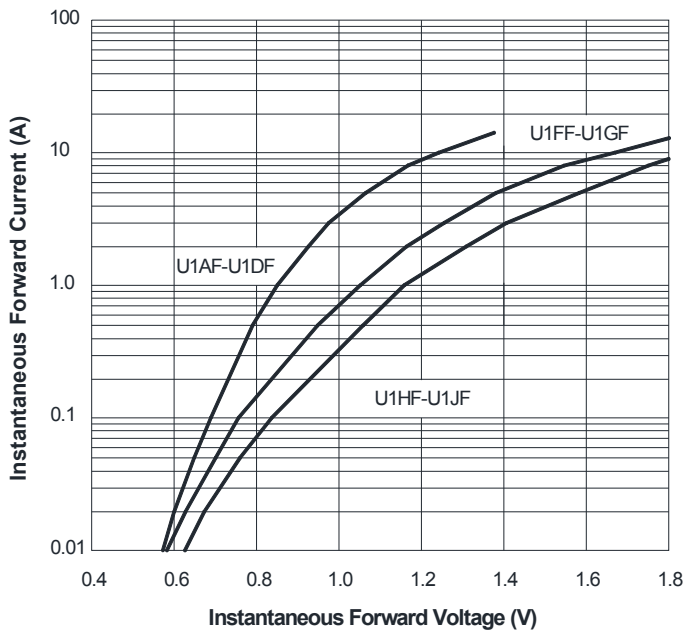


FIG.4: Typical Reverse Characteristics


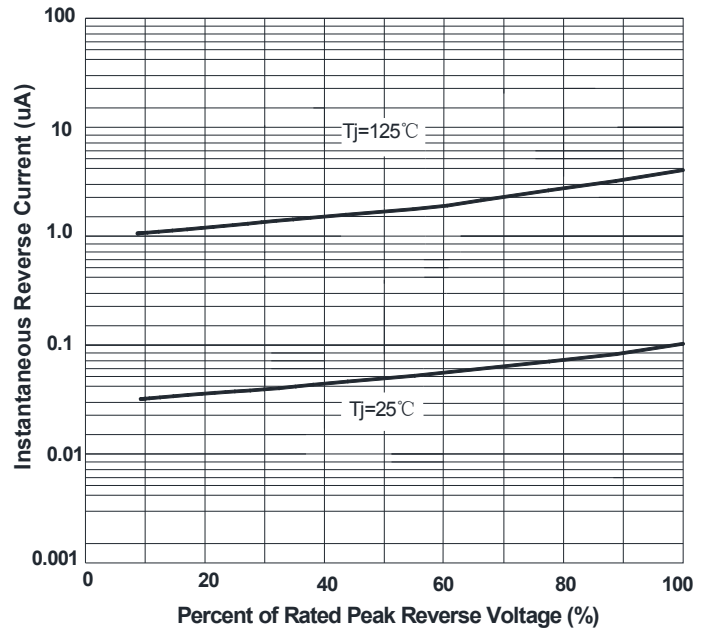



FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

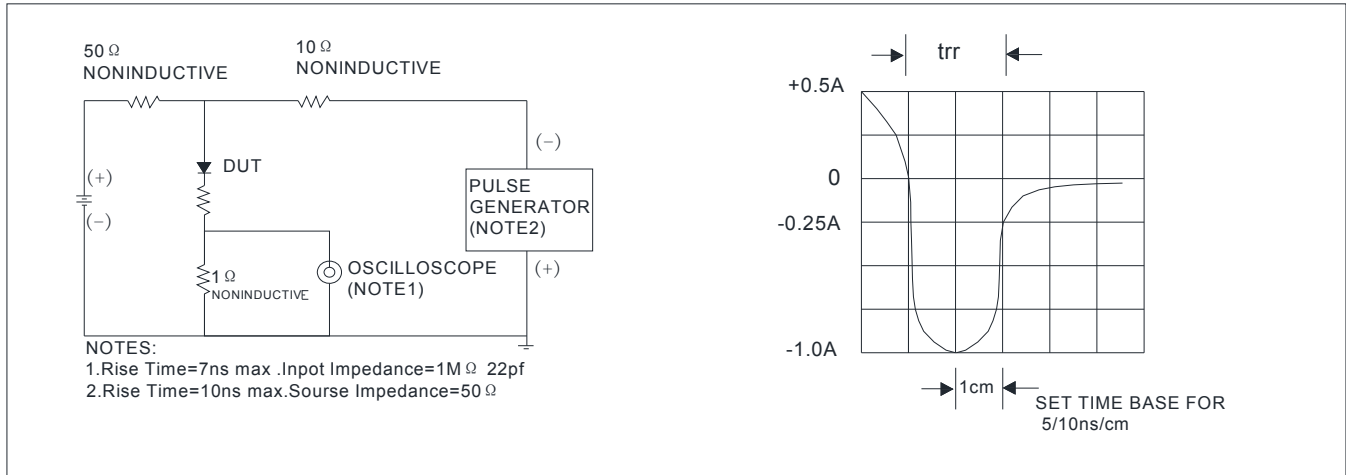

Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
U1AF-U1JF	F1	Approximate 0.034	3000	24000	96000	7" reel
U1AF-U1JF	F2	Approximate 0.034	10000	/	160000	13" reel
U1AF-U1JF	F3	Approximate 0.034	10000	/	120000	13" reel
U1AF-U1JF	F4	Approximate 0.034	7500	/	120000	13" reel

Outline Dimensions

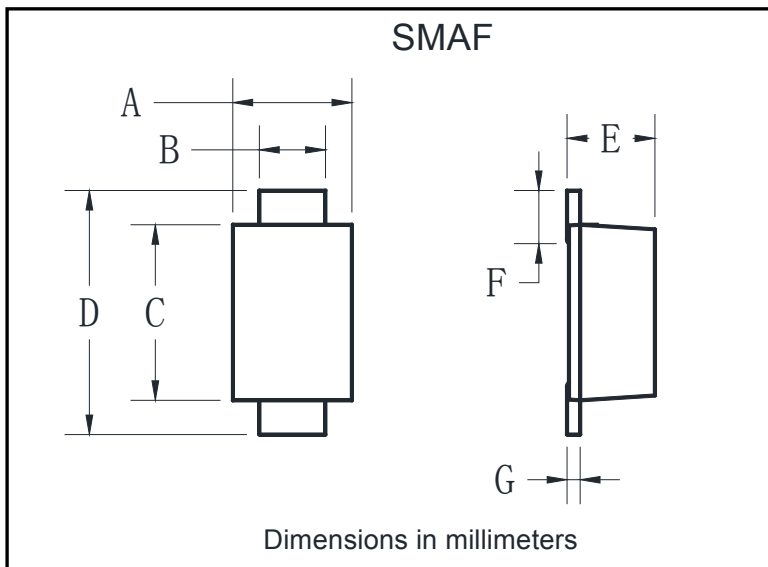


SMAF		
Dim	Min	Max
A	2.40	2.80
B	1.35	1.45
C	3.40	3.60
D	4.40	4.80
E	1.05	1.25
F	0.50	1.00
G	0.15	0.22



U1AF THRU U1JF

■ Suggested pad layout

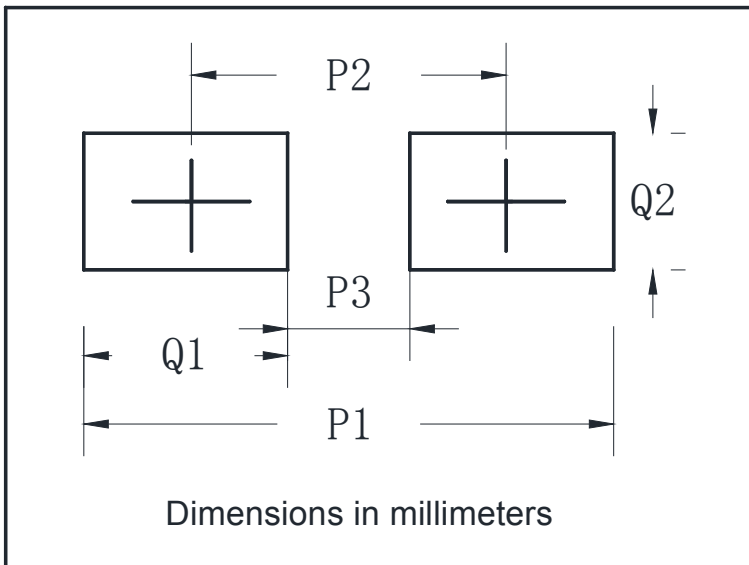

SMAF	
Dim	Millimeters
P1	6.50
P2	4.00
P3	1.50
Q1	2.50
Q2	1.70



U1AF THRU U1JF

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.