


Ultra Current Beads **UCB20**

Dimensions: $\frac{\text{Inches}}{(\text{mm})}$

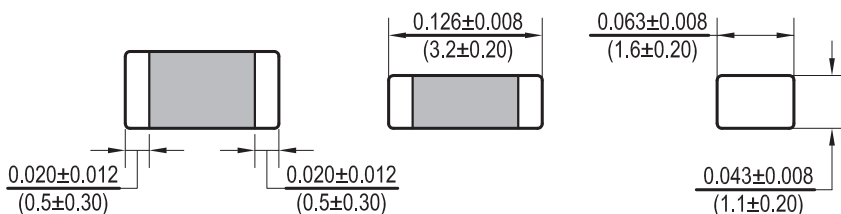

Allied Part Number	Impedance (Ω) @ 100MHz +/- 25%	Tolerance (%)	Test Freq. MHz, 200mV	DCR Max. (Ω)	Rated Current (mA)Max
UCB20-110-RC	11	25	100	.012	6000
UCB20-190-RC	19	25	100	.012	6000
UCB20-260-RC	26	25	100	.012	6000
UCB20-300-RC	30	25	100	.012	6000
UCB20-320-RC	32	25	100	.012	6000
UCB20-330-RC	33	25	100	.012	6000
UCB20-400-RC	40	25	100	.012	6000
UCB20-480-RC	48	25	100	.012	6000
UCB20-500-RC	50	25	100	.012	6000
UCB20-600-RC	60	25	100	.012	6000
UCB20-680-RC	68	25	100	.012	6000
UCB20-700-RC	70	25	100	.012	6000
UCB20-800-RC	80	25	100	.012	6000
UCB20-900-RC	90	25	100	.012	6000
UCB20-101-RC	100	25	100	.012	6000
UCB20-121-RC	120	25	100	.012	6000
UCB20-151-RC	150	25	100	0.02	4500
UCB20-161-RC	160	25	100	0.02	4500
UCB20-181-RC	180	25	100	0.02	4500
UCB20-221-RC	220	25	100	0.02	4500

Features

- Ultra High Current
- Standard 1206 size
- Triple plated RoHS Compliant Terminations
- Excellent Solderability

Electrical

Impedance range: 11 Ω to 220 Ω

Tolerance: 25% over entire range

Operating Temp: -55°C ~ +125°C

Rated Current: The current at which the temperature rise shall be no more than 30°C. Also, the rated current is de-rated above 85°C to approximately 1000mA at 125°C

Resistance to Solder Heat

Pre-Heat 150°C, 1 minute

Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free)

Solder Temp: 260°C peak for 10 sec. $\pm$ 1 sec.

Test Equipment

(Z): HP4291A RF Impedance/Material Analyzer

(RDC): Chen Hwa 502BC/HP4338B

Physical

Packaging: 3000 pieces per 7 inch reel

Marking: None

All specifications subject to change without notice.