

30A Avg.

120 Volts

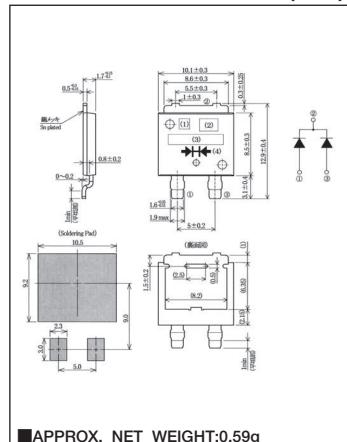
SBD

UCHS30A12

■最大定格 Maximum Ratings ($T_a=25^\circ\text{C}$: unless otherwise specified)

Item	Symbol	Condition			Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage	V_{RRM}	120			V
平均整流電流 Average Rectified Forward Current	I_o	50Hz 正弦全波, 抵抗負荷 50Hz Full Sine Wave, Resistance Load	$T_c=106^\circ\text{C}$ $V_{RM}=60\text{V}$	30	A
実効順電流 R.M.S. Forward Current	$I_F(\text{RMS})$	33.3			A
サージ順電流 Surge Forward Current	I_{FSM}	250 50Hz正弦全波 1サイクル 非くり返し 50Hz Full Sine Wave 1cycle, Non-repetitive			A
動作接合温度範囲 Operating Junction Temperature Range	T_{jw}	$-40 \sim +150$			°C
保存温度範囲 Storage Temperature Range	T_{stg}	$-40 \sim +150$			°C

■OUTLINE DRAWING(mm)

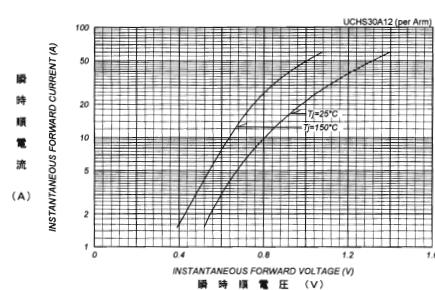
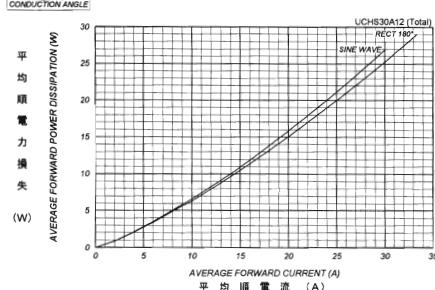
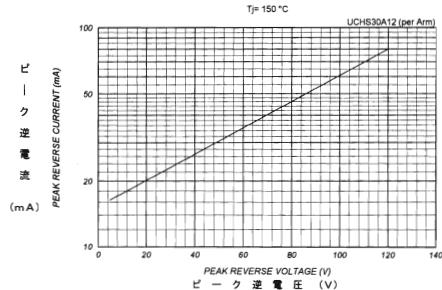
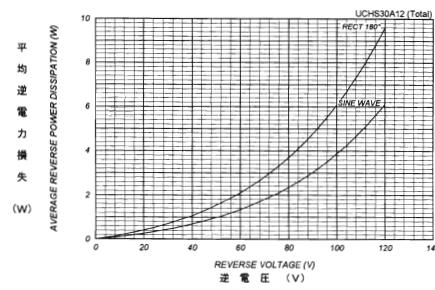
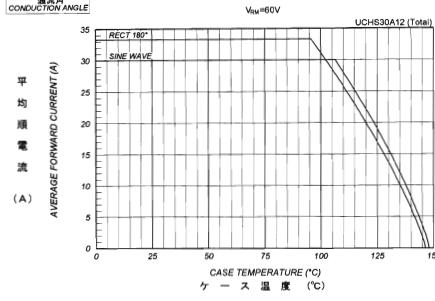
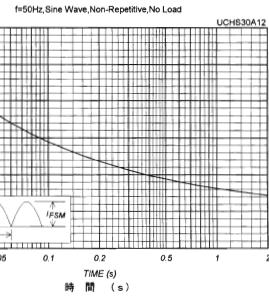


■APPROX. NET WEIGHT:0.59g

■電気的・熱的特性 Electrical/Thermal Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
ピーケ逆電流 Peak Reverse Current	I_{RM}	$T_j=25^\circ\text{C}, V_{RM}=V_{RRM}$, 一素子あたり Per Diode	—	—	100	μA
ピーケ順電圧 Peak Forward Voltage	V_{FM}	$T_j=25^\circ\text{C}, I_{FM}=15\text{A}$, 一素子あたり Per Diode	—	—	0.90	V
熱抵抗 Thermal Resistance	$R_{th(j-c)}$	接合部・ケース間 Junction to Case	—	—	1.5	°C/W

■定格・特性曲線

FIG.1
順電圧特性
FORWARD CURRENT VS. VOLTAGEFIG.2
平均順電力損失特性
AVERAGE FORWARD POWER DISSIPATIONFIG.3
ピーケ逆電流 - ピーケ逆電圧特性
PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGEFIG.4
平均逆電力損失
AVERAGE REVERSE POWER DISSIPATIONFIG.5
平均順電流 - ケース温度定格
AVERAGE FORWARD CURRENT VS. CASE TEMPERATUREFIG.6
サージ順電流定格
SURGE CURRENT RATINGSFIG.7
接合容量特性
JUNCTION CAPACITANCE VS. REVERSE VOLTAGE