



## Ultrafast Plastic Rectifier

**Reverse Voltage** 50 to 1000V  
**Forward Current** 2.0 A


### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ultrafast recovery time for high efficiency
- Low forward voltage, high current capability
- Low leakage current
- High surge current capability
- High temperature metallurgically bonded construction
- High temperature soldering guaranteed: 300°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### Mechanical Data

**Case:** JEDEC DO-204AC, molded plastic  
**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.015 oz., 0.4 g

DO-204AC (DO-15)

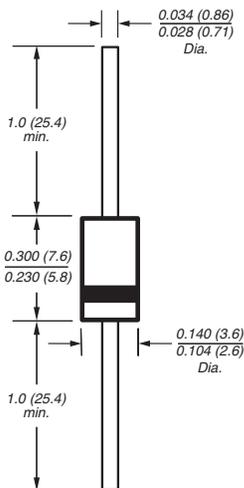

Dimensions in inches and (millimeters)

### Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	UF2A	UF2B	UF2D	UF2F	UF2G	UF2J	UF2K	UF2M	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	210	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A = 55^\circ\text{C}$	$I_{F(AV)}$	2.0								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	60								A
Typical thermal resistance (Note 1)	$R_{\theta JA}$ $R_{\theta JL}$	40 15								°C/W
Operating and storage temperature range	$T_J, T_{STG}$	-55 to +150								°C

### Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.


Parameter	Symbol	UF2A	UF2B	UF2D	UF2F	UF2G	UF2J	UF2K	UF2M	Unit	
Maximum instantaneous forward voltage at 2.0A	$V_F$	1.3			1.5		1.7			V	
Maximum DC reverse current at rated DC blocking voltage $T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$	$I_R$	10 100								$\mu\text{A}$	
Maximum reverse recovery time at $I_F = 0.5\text{A}$ , $I_R = 1.0\text{A}$ , $t_{rr} = 0.25\text{A}$	$t_{rr}$	50					75				ns
Typical junction capacitance at 4.0V, 1MHz	$C_J$	50					30				pF

**Note:** (1) Thermal resistance from junction to ambient, and from junction to lead at 0.375" (9.5mm) lead length, P.C.B. mounted




**Ratings and Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 - Maximum Forward Current Derating Curve**

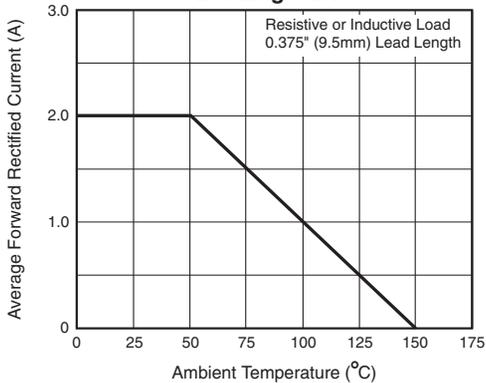


**Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current**

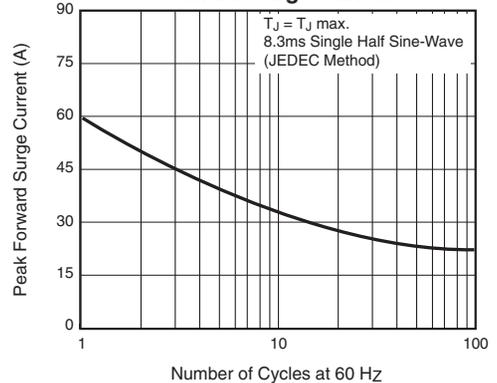


**Fig. 3 - Typical Instantaneous Forward Characteristics**

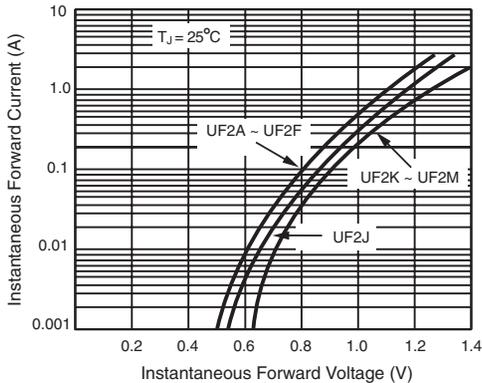

**Fig. 4 - Typical Reverse Characteristics**

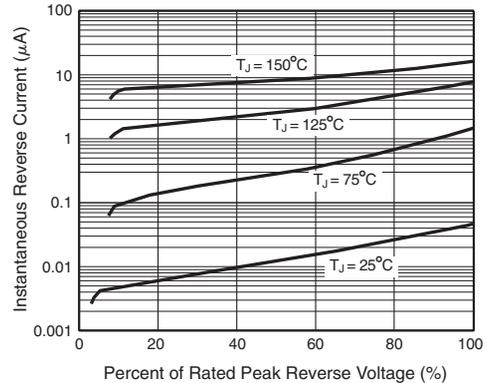

**Fig. 5 - Typical Junction Capacitance**

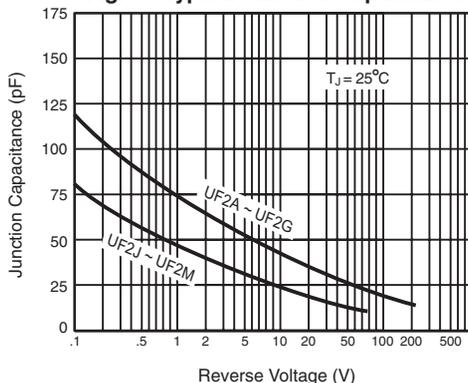

**Fig. 6 - Typical Transient Thermal Impedance**

